
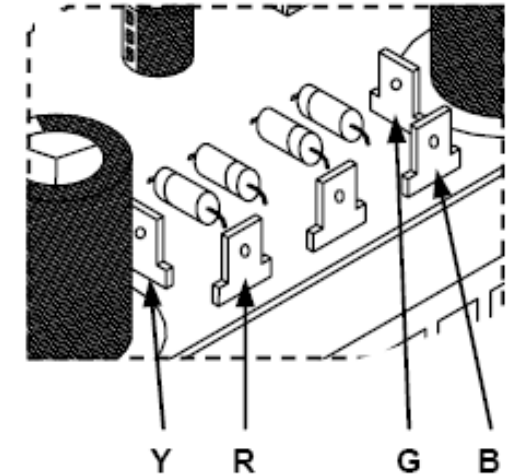


18. Test and adjustments

- Use a 2 x 25 to 30Vac / 100 - 120VA transformer.
- Connect the transformer to the AC power connections of the PCB.
- The Velleman transformer colour scheme is specified on the pcb.

☞ **Careful : Other brands may feature a different scheme !**

Y: yellow, R: red, B: blue, G: grey.



Transformer supplied by ESR Electronic Components Ltd

ESR Order Code: **325-030** Model: **H0120-157F**

Cross reference chart for transformer wiring

K8060 Board Ref	Velleman Colour	ESR Colour	Output Voltage
Y	Yellow	Yellow	30Vac #1
R	Red	Red	0Vac #1
B	Blue	<u>Black</u>	0Vac #2
G	Grey	Grey	30Vac #2