

3900 Metal Toggle Switches 16A 250Vac - IP67 Sealed Versions



- ▶ Metal toggle switches
- ▶ Ratings up to 20A, 277V ac
- ▶ Single and double pole
- ▶ Choice of circuits including 3 position and momentary
- ▶ Sealed version supplied complete with gaskets
- ▶ Panel seal version to IP67
- ▶ 6.3mm terminals
- ▶ Guard option

Approvals and specifications



16(4)A 250Vac T85 (3900 & 3950)
10(4)A 250Vac T85 (All other circuits)



UL CSA* 20A 125/277Vac (ON-OFF Circuits)
UL CSA* 16A 125/277Vac (Other Circuits)
UL CSA* 7A 72Vdc, 14A 36Vdc
UL 250Vac 1hp, 125Vac 1/2hp
UL 65°C, file E45221, CSA file LR10990


Approvals and ratings vary with function.
3mm contact gap except where marked μ .
Technical data on pages 4 & 5.
* CSA approval for A and B bodies only

toggle switches

C 3900 B E - - -

TERMINAL FUNCTION ACTUATOR BODY OPTIONS

TERMINAL	FUNCTION	ACTUATOR	
C 6.3 x 0.8	Single pole 	B metal Metal toggle finish is nickel plate	
	3900 		3950
	3901 		3951
	3902 		3952
	3910 		3960
	3911 		3961
	3920 		3970
	3921 		3971
	3922 		3972
	Other terminals to special order		

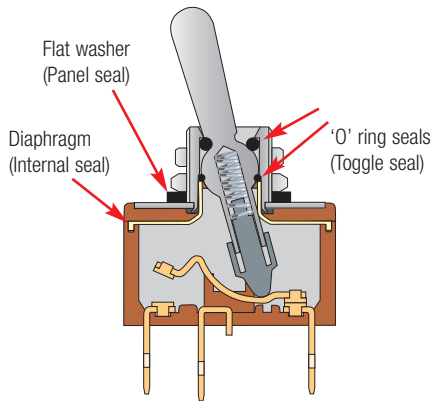

Toggle switch - sealed version
BE and BF types



Guard R17-10



C3900BE ---



C3920BA ---




C3950BF ---




C3972BB ---

BODY


A
Single pole




E
Panel sealed, single pole



B
Double pole



F
Panel sealed, double pole



OPTIONS

Neck Seal A0539MOAAA
Actuator is visible



Cover A1080MOAAA



Covers have internal nylon nuts

Fixing nuts

Nickel plated brass are supplied



Hex Back nut



Knurled Front nut
Panel thickness 4.0 with backnut


Plate F00232PAAA
Plate SP or DP




DIMENSIONS (mm) * Indicates ON position (for ON - OFF switches)

Single Pole

(C terminals shown)

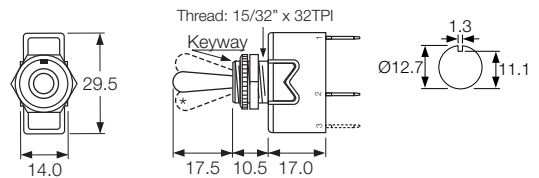


A Body

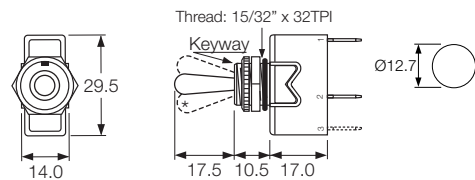


E body (panel sealed)

Double Pole

(C terminals shown with barrier)

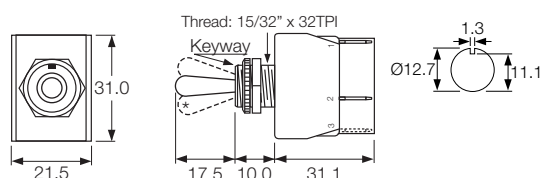

B Body

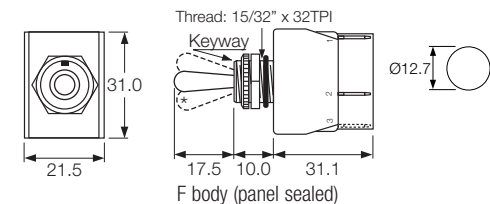

F body (panel sealed)

1700 & 1750 Toggle Switches 16A 250Vac Single and Double Pole



- ▶ Nylon toggle switches
- ▶ Ratings up to 20A, 250V ac
- ▶ Single and double pole
- ▶ Wide choice of terminals
- ▶ Choice of circuit options including 3 position
- ▶ Flat & round actuator options

Approvals and specifications



16(4)A 250Vac T85



- UL 20A 250Vac Non Ind (Single pole)
- UL 16A 250Vac Non Ind (Double pole)
- UL CSA (2 pos types) 250Vac 1hp, 125Vac 1/2hp
- UL CSA (3 pos types) 250Vac 1/2hp, 125Vac 1/4hp
- CSA 16A 250Vac Non Ind
- UL 85°C, file E45221, CSA file LR10990
- UL and CSA N/A on momentary types

Selective "A, B, C" and "OFF, A, A+B" circuits at 5 amp also available.
3mm contact gap except where marked μ .
Technical data on pages 4 & 5.

toggle switches

C 1750 H O - - -

TERMINAL FUNCTION ACTUATOR BODY OPTIONS

TERMINAL	FUNCTION		ACTUATOR
C 6.3 x 0.8	Single pole 1700 ON - OFF	Double pole 1750 ON - OFF	H 16.4
H 4.8 x 0.8	1710 μ ON - ON	1760 μ ON - ON	
K 2.8 x 0.8	1720 μ ON - OFF - ON	1770 μ ON - OFF - ON	R 13.8
T Solder	1721 μ ON - OFF - ON (momentary 1 side)		
X PCB 0.8 Sq	1722 μ ON - OFF - ON (momentary 2 sides)		The switch is on between centre terminals (2 & 5) and the terminals over which the lever is positioned.



C1700R --



C1700H --




C1760R --





C1750H --

BODY

0
Single pole



0
Double pole



Panel hole (all types)
Panel thickness (Max)
Both nuts - 3.5mm
Less backnut - 6.5mm

OPTIONS

Neck Seal A0539M0AAA

Material - Nitrile
(H & R Actuators)
Actuator visible



Cover A1080M0AAA

Material - EPDM
(R Actuator only)



Cover A0331M0AAA


Material - PVC
(R Actuator only)




Covers have internal nylon nuts

Fixing nuts (Standard is M506 & T92)


T5 Hex brass
M506 Hex nylon



T92 Knurled brass - slotted




M279 Knurled nylon



DIMENSIONS (mm)

Single Pole


(C terminals shown)

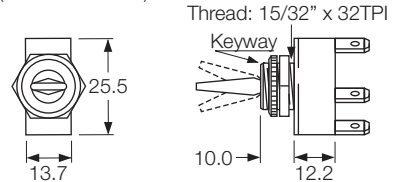


Optional
F00232PAAA
plate SP or DP

Double Pole


(C terminals shown)

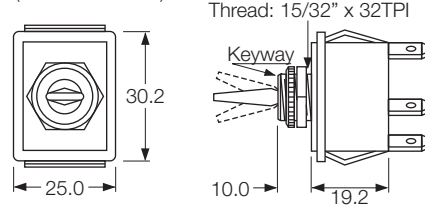

Without barrier




With barrier



Optional terminal barrier M441.

0600 Toggle Switches 1A 250Vac

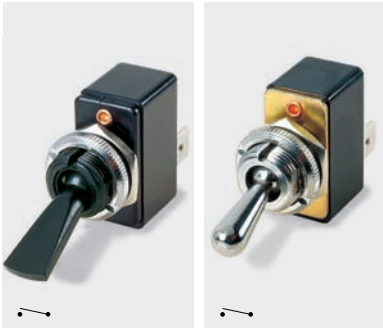

C0600HD --- C0600CC ---



C0602SC ---

- ▶ Toggle switch
- ▶ Brass and nylon actuators
- ▶ Single pole
- ▶ Latching and momentary action
- ▶ Choice of actuator profiles

Approvals and specifications

In house test: 1A 250Vac — Indicative rating only
3A 12/24Vdc — Indicative rating only


3mm contact gap.
Technical data on pages 4 & 5.

C 0600 H D ---
TERMINAL FUNCTION ACTUATOR BODY OPTIONS

▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BODY	▶ OPTIONS
<p>C</p> <p>6.3 x 0.8 10.1</p>	<p>0600</p> <p>ON - OFF</p> <p>0602</p> <p>ON - OFF (momentary ON)</p>	<p>C Chromed brass (0600)</p> <p>15.0</p> <p>U Nylon (0600)</p> <p>12.1</p> <p>G Nylon (0600)</p> <p>27.0</p> <p>H Nylon (0600)</p> <p>17.0</p> <p>S Chromed brass stem/nylon paddle (0602 only)</p> <p>41.8</p>	<p>D Nylon neck and top plate (Used with actuator codes U, G and H)</p> <p>C Metal neck and top plate (Used with actuator codes C and S)</p> <p>Panel thickness - 3.5mm Back nut must be fitted</p> <p>Fixing nuts (Standard is M506 & T92)</p> <p>T5 Hex brass M506 Hex nylon</p> <p>15.2 3.0 (M506) 2.0 (T5)</p> <p>T92 Knurled brass - slotted</p> <p>16.0 2.6</p> <p>M279 Knurled nylon</p> <p>16.2 4.1</p>	<p>Cover A0331M0AAA (C Actuator only)</p> <p>Neck Seal A0539M0AAA (C, H & U Actuators) Actuator visible</p> <p>Cover A1080M0AAA (C Actuator only)</p> <p>Covers have internal nylon nuts.</p>

Dimensions (mm)

0600 (U actuator shown)



0602

