

TEC 3000



DATA SHEET

TEC 3000 The future of chemical control.


Topline have introduced a revolutionary intelligent chemical control system with the simplest operator control interface on the market.

Whilst conventional swimming pool control systems rely heavily upon information input by the operators to control water chemistry, with regular calibration, standardisation, re-testing and probe cleaning needed to keep it operating satisfactorily.

The TEC3000 learns and adjusts to the information provided by its own sensors and software program. The operator only needs to know the levels needed to run their pool. With any adjustment made by one single button press.



The user interface cannot be simpler which is a colour touch screen with Up, Down and OK buttons for each of the chemicals being dosed.

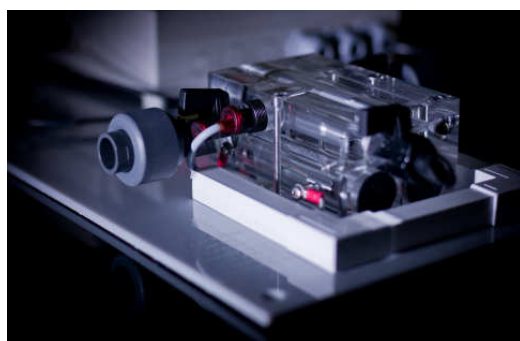

The system is programmed during commissioning with:

- Pool volume
- Pool turnover period
- Type of chemicals being dosed
- Concentration of chemical being dosed
- Size of dosing pump dosing the chemical

Once the system is installed and commissioned the unit will control the levels in the water by:

- Monitoring a three electrode amperometric cell
- Monitoring optional redox probe (Optional)
- Monitoring pH probe
- Increasing the levels on the pressing of "UP" key
- Maintain the levels on the pressing of "OK" key
- Decreasing the levels on the pressing of "DOWN" key
- Learning the rate of response from probes during normal operation and after the addition of chemicals.
- Automatically adjust standardisation and calibration after key presses and addition of chemicals
- Stop dosing in the event of no water flow to sample cell.
- Stop dosing in the event of no chemical in the storage tanks (Optional)
- Text fault conditions to PC or mobile phones (TEC3000P)

Summary

Once the system is programmed the TEC3000 will learn and control the chemical dosing in the conventional way via sensing probes as well as adjusting and re-calibrating/standardising automatically. The operator need only press a single button to change the chemical levels in the pool or spa.

These systems are suitable for domestic and light commercial water treatment applications.

Inverter Energy Control System


As an optional extra, the Energy Control System can be added to the TEC3000. This has been designed to help reduce your energy consumption – saving up to 50% on your bills.

- Circulation pump speed is reduced when chemical levels are acceptable
- Circulation pump speed is reduced in off peak periods

TEC 3000



TECHNICAL DATA	TEC3500 Control System
Dimensions	Width 365mm, Height 500mm, Depth 110mm
Power Requirement	240 VAC single phase 50 Hz.
Power Consumption	20 watts (excluding feeders)
Operating Temperature	0-40 degrees centigrade
Enclosure	Plastic IP54
Front control panel	Polyester membrane
Display	Touch screen colour
Chlorine sensor	Amperometric 3 electrode system Measuring range 0-40 mg/l
pH sensor	Glass with internal reference Measuring Range 0-14 pH
Redox sensor (option)	+/- 2v
Outputs	Chemical feeder outputs are 3 x 240 VAC 2amps switched Chlorine or Bromine, Acid and Alkali Energy Control System (option)
Inputs	3 analogue 1 digital flow sensor Colour touch screen

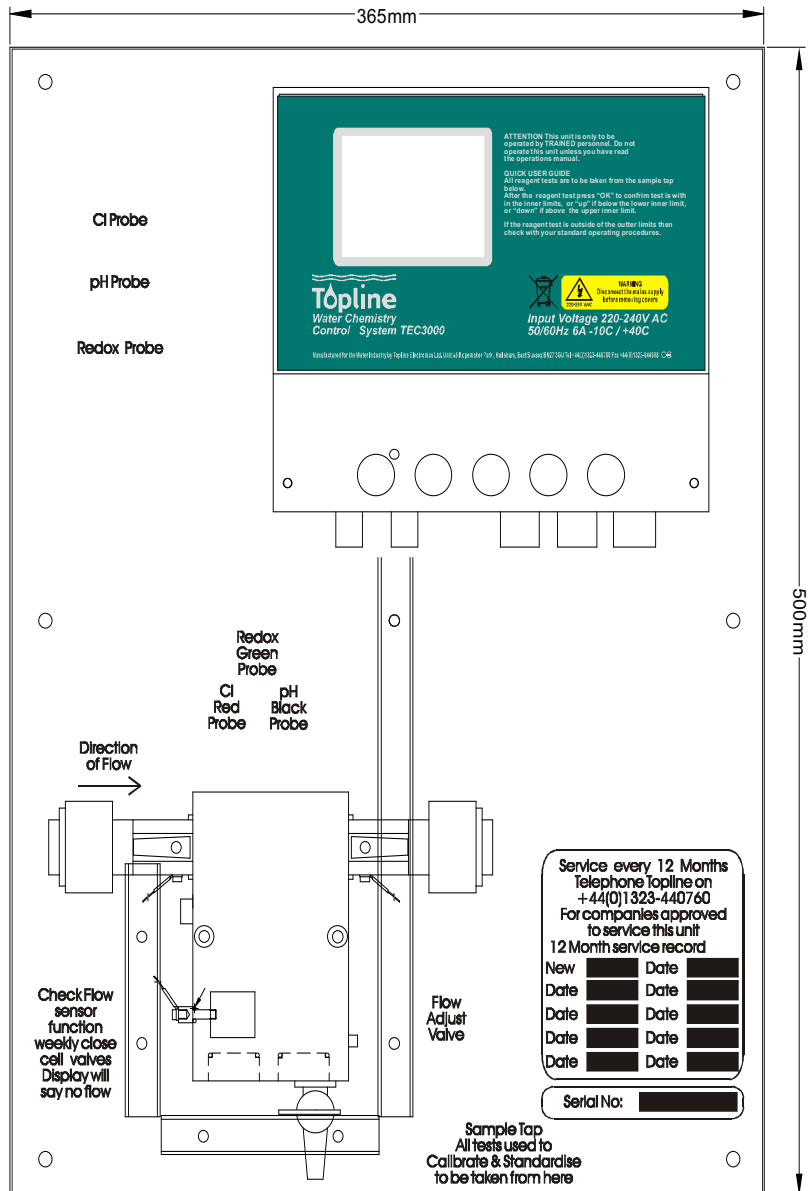

In order to maintain the highest standards, TOPLINE reserves the right to alter specifications without notice. 01-12-10

Topline Electronics Limited

Unit A8 Ropemaker Park
Diplocks Way Industrial Estate
Hailsham, East Sussex BN27 3GU

Tel: 01323 440760 Fax: 01323 844508

Email: sales@topline.uk.net

Internet: www.topline.uk.net