
AA500BOL






Electromechanical rising bollards - fully assembled, pre-wired and ready for installation, no hydraulic plumbing. Available in 500mm or 700mm, standard finish RAL 7015. Also available in stainless steel grade AISI 304 and RAL colour (on request). Slowdown in both directions. High intensive duty cycle. Speed - 6 seconds for the 500mm and 9 seconds for the 700mm. The control panel can operate up to 4 bollards simultaneously. Independent movement requires additional control panels.

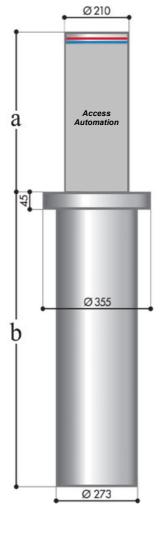

mm	STOPPY	STOPPY H
а	500	700
b	915	1175
С	1100	1350
d	1000	1250
е	650	1000

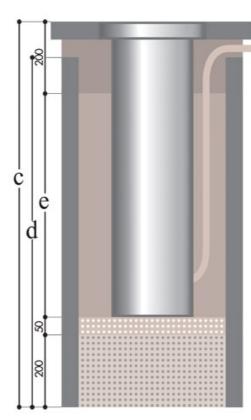



Optional Traffic lights