

CI/SfB	(35.3)	Xh	
CI/SfB	(32.7)	Xh2(K2) j	
CI/SfB	(32.8)	Xh	
CI/SfB	(37.5)	Xh j	

4th Edition

	Quality
Association Interior Sp.	Of Cecialists SO 9001: 2000 REGISTERED FIRM















contents



Discpan

pages 4-5



Slimpan

pages 6-7



Tilepan

pages 8-9




Loftpan

pages 10-11



Plasticpan

pages 12-13



Firepan

pages 14-15



Tradpan

pages 16-17



Firepan Magna


pages 18-19



Plastapan

pages 20-21

2 Discpan

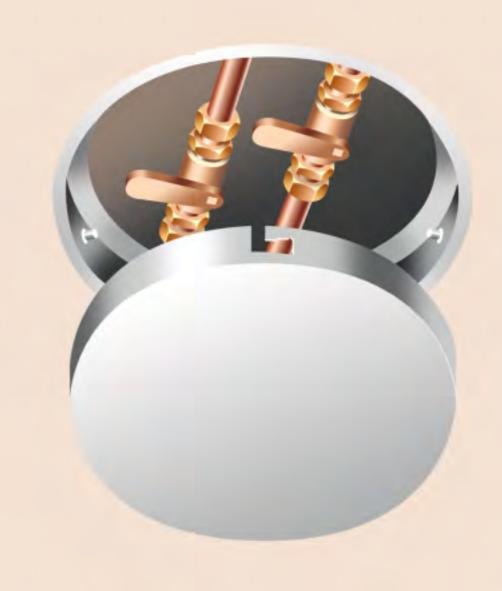

Discpan PF Discpan SBF

PANELCRAFT ACCESS
PANELS have developed the
DISCPAN RANGE to
complement circular light
fittings, speakers, smoke
detectors and air grilles fitted in
the ceiling, thereby maintaining
an aesthetic appearance, whilst
providing a cost effective
solution for access to building
engineering services concealed
in the ceiling void.


Availability


Standard sizes EX STOCK for Next Day Delivery

Standard Sizes

Dia m eter 300 m m 450 m m 600 m m

- Non-fire rated
- Designed for ceilings only
- 35 m m overall depth
- Precision manufactured in Zintec. Aluminium panels are available to order.
- Visible picture frame (PF) or simulated beaded frame (SBF) for taping and jointing to conceal the frame.
- Supplied powder coated RAL 9010 20% gloss as standard
- No on site manufacturing costs
- Easily installed in minutes straight from the hox
- Suitable for on-site decoration to match the surrounding areas if required
- Door easily removed without the use of tools

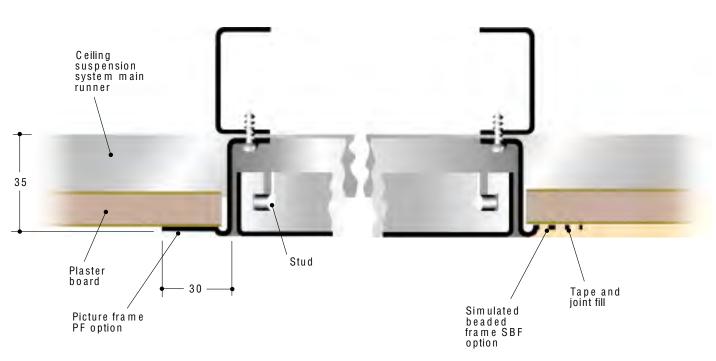

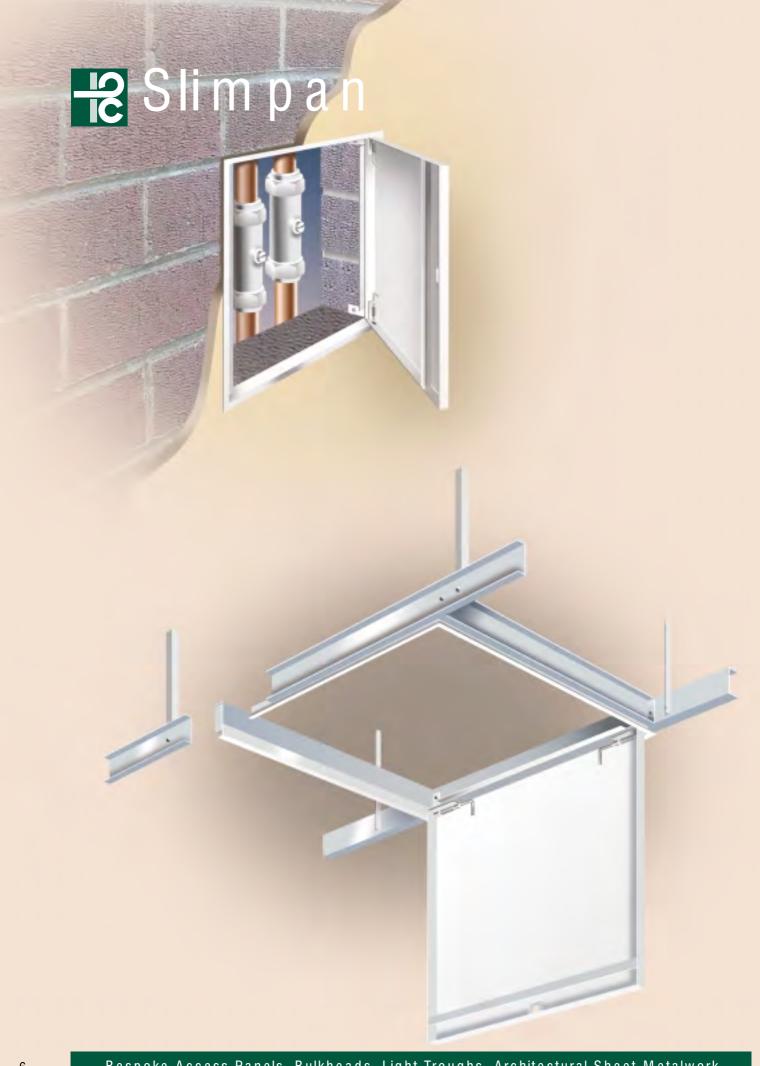

Slimpan PF Slimpan SBF

PANELCRAFT ACCESS PANELS
have developed the SLIMPAN
RANGE to provide a cost effective
solution for access to building
engineering services concealed in
wall cavities or ceiling voids where
the depth of frame is critical.

Availability

Available only in standard sizes EX STOCK for Next Day Delivery

Standard Sizes


Н		W	Н		W
200	Χ	200	550	Χ	550*
300	Χ	300	600	Χ	300
450	Χ	450	600	Χ	600

*To fit between 600 m m centre studs NOTE Add 15 m m to above sizes for structural opening

- Non-fire rated.
- 25 m m overall depth, allowing insulation where space is limited
- Versatile panel suitable for walls and ceilings avoiding confusion when ordering or fitting on site
- Precision manufactured in Zintec
- Visible picture frame (PF) or simulated beaded frame (SBF) for taping and jointing to conceal the frame.
- Supplied powder coated RAL 9010 20% gloss as standard
- Budget lock as standard
- No on site manufacturing costs
- Easily installed in minutes straight from the box
- Suitable for on-site decoration to match the surrounding areas if required
- Door easily removed



Tile pan

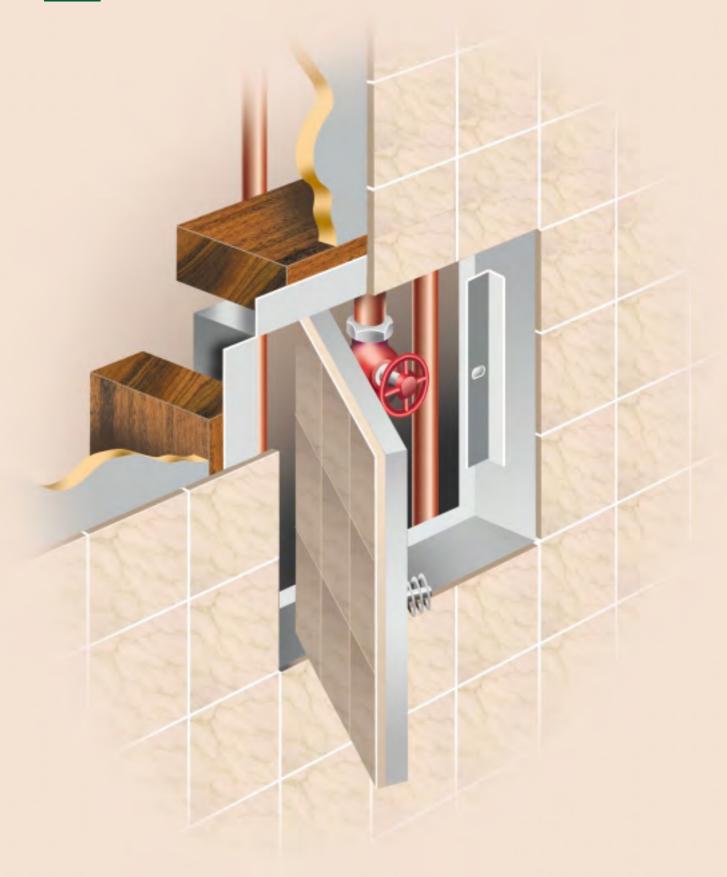

Tilepan

PANELCRAFT ACCESS PANELS have developed the TILEPAN RANGE to provide an effective solution to gain access to building engineering services concealed in ceramic, marble or slate tiled wall cavities.


Availability

As panels are made to suit individual requirements clear instructions are vital before manufacture can commence.


Panelcraft requires the following information

Width of door comprises of No. of tiles and tile width + grout line width.


Height of door comprises of No. of tiles and tile height + grout line width.



- Totally invisible
- ❖ Deflection no more than 1 mm when open
- Fire Rated and Non-Fire Rated
- Designed for walls only
- Custom made to suit tile module
- Only 55 m m overall depth excluding tiles
- Precision manufactured in Zintec.
- Concealed frame fixed into the wall prior to tiling
- Door faced with tiles on site up to 10 mm thick to finish flush with surrounding tiles
- Supplied powder coated RAL 9010 20% gloss as standard
- Touch catch as standard
- Budget lock keylock or security lock options available depending on specification
- No on site manufacturing costs
- Easily installed in minutes straight from the box
- Door easily removed without use of tools

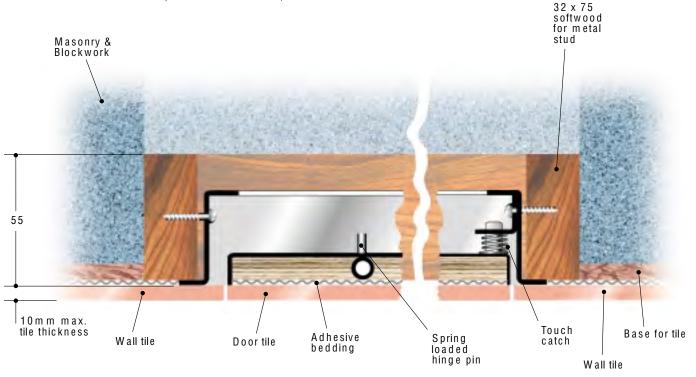

Loftpan

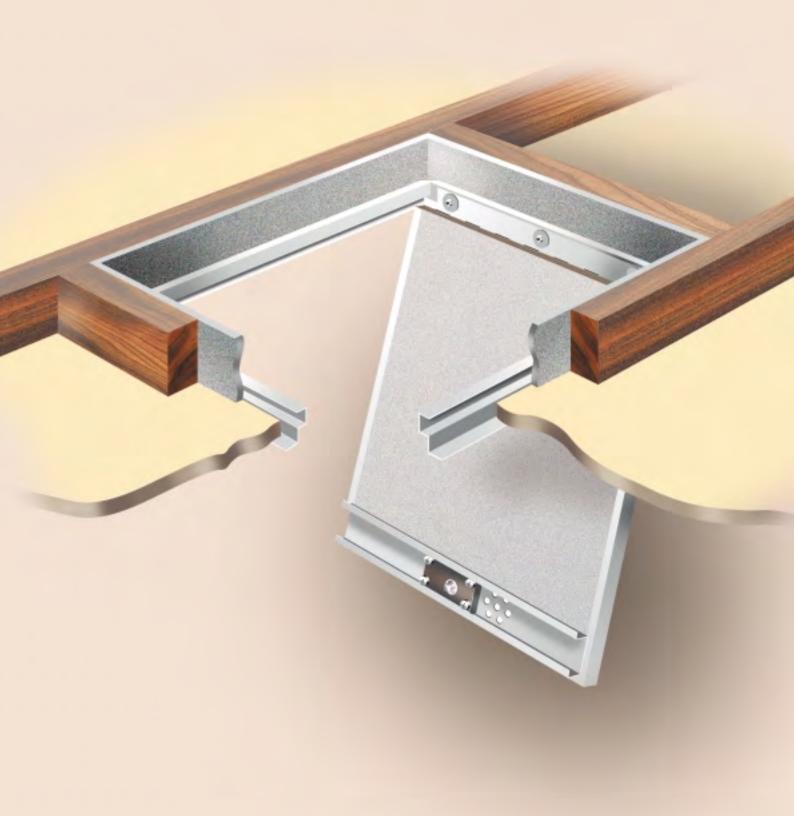

Loftpan PF60 Loftpan SBF60

PANELCRAFT ACCESS
PANELS have developed the
LOFTPAN RANGE to provide
an effective solution to gain
access to lofts and roof space


Availability

Standard sizes EX STOCK for Next Day Delivery

Standard Sizes

 $530 \, \text{mm}$ (hinge side) x $745 \, \text{mm}$

- ❖ Fire Rated. And Non Fire Rated
- Provides 60 min Fire Protection
- Conforms to Building Regulation Document L1 & L2 2002
- ❖ 50 m m overall depth
- Fitted between max 47 mm wide 600 mm centre trusses or joists
- Precision manufactured in Zintec.
- Fully concealed full length heavy duty piano hinge
- Visible picture frame (PF) or simulated beaded frame (SBF) for taping and jointing to conceal the frame.
- Supplied powder coated RAL 9010 20% gloss as standard
- Slot Budget lock
- Keylock or security lock options available depending on specification
- Flap down door and hinged design allows for use with telescopic ladders (available on request)
- No on site manufacturing costs
- Easily installed in minutes straight from the box
- Suitable for on-site decoration to match the surrounding areas if required
- Door easily removed

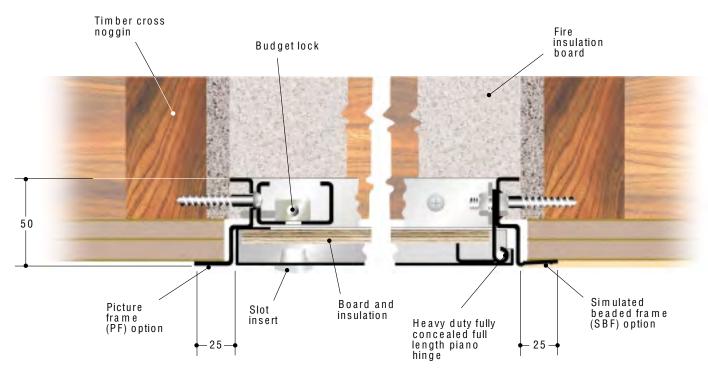

2 Plasticpan



Plasticpan

PANELCRAFT ACCESS
PANELS have developed the
PLASTICPAN RANGE to provide
a cost effective solution and
versatile access to plumbing,
electrical, gas, water
installations etc eliminating
costly wall and ceiling repair.


Availability

Available only in standard sizes EX STOCK for Next Day Delivery


Standard Sizes

Н	W	
102	Χ	152
153	Χ	230
203	Χ	203
348	Χ	348
350	Χ	737

- Non-fire rated.
- 21 m m overall depth, allowing access where space is limited
- Versatile panel suitable for walls and ceilings avoiding confusion when ordering or fitting on site
- Made from precision moulded high impact noncorrosive ABS material
- ❖ Frame reversible for concealment
- No on site manufacturing costs
- Easily installation mounting allows for surface or flush mounting straight from the box
- No timber framing required
- Suitable for on-site decoration to match the surrounding areas if required
- Door easily removed
- Pop out cable entry points

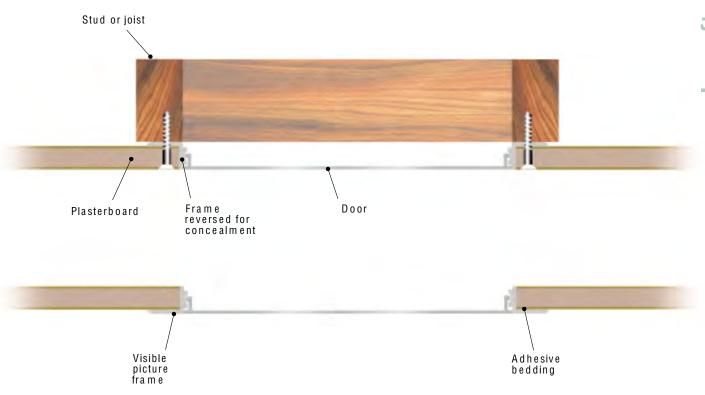



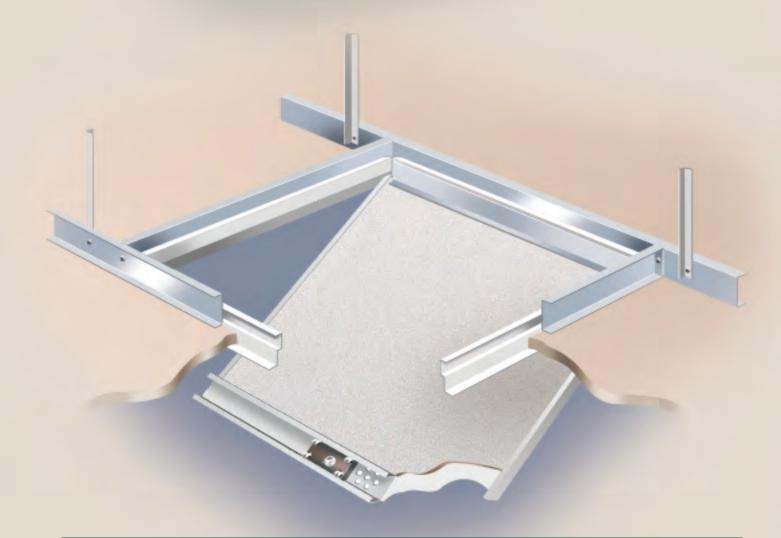

Firepan PF60 Firepan PF120 Firepan SBF60 Firepan SBF120

PANELCRAFT ACCESS PANELS have developed the TRADPAN RANGE to provide an effective solution to gain access to building engineering services concealed in drylined ceiling or wall structures which serve fire protection or separation purposes.

Availability

Standard sizes EX STOCK for Next Day Delivery


BESPOKE SIZES MADE TO ORDER

Sta	n d	ard	Sizes
	ш		۱۸/


Н		W	Н		W	
200	Χ	200	600	Χ	600	
300	Χ	300	800	Χ	800	
450	Χ	450	900	Χ	550*	
550	Χ	550*	1200	Χ	550*	
600	Х	300	2000	Х	550*	

*To fit between 600mm centre studs

- Fire rated.
- Provides 30 min. 60 min or 120 min Fire Protection for walls
- Provides 60 min or 120 min Fire Protection for ceilings.
- Provides 60 min or 120 min Fire Integrity from both sides for walls only
- Versatile panel suitable for walls and ceilings avoiding confusion when ordering or fitting on site
- ◆ 50 m m overall depth
- Precision manufactured in Zintec.
- Fully concealed full length heavy duty piano hinge
- Visible picture frame (PF) or simulated beaded frame (SBF) for taping and jointing to conceal the frame.
- Supplied powder coated RAL 9010 20% gloss as standard
- Budget lock as standard
- Keylock or security lock options available depending on specification
- No on site manufacturing costs
- Easily installed in minutes straight from the box
- Suitable for on-site decoration to match the surrounding areas
- ◆ Door easily removed

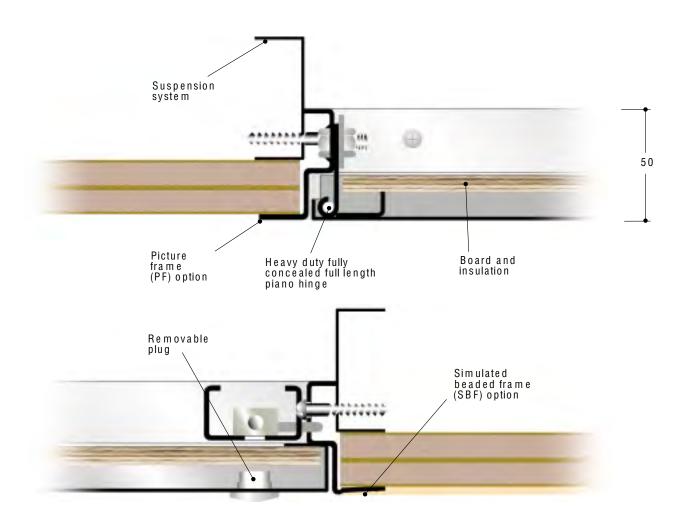



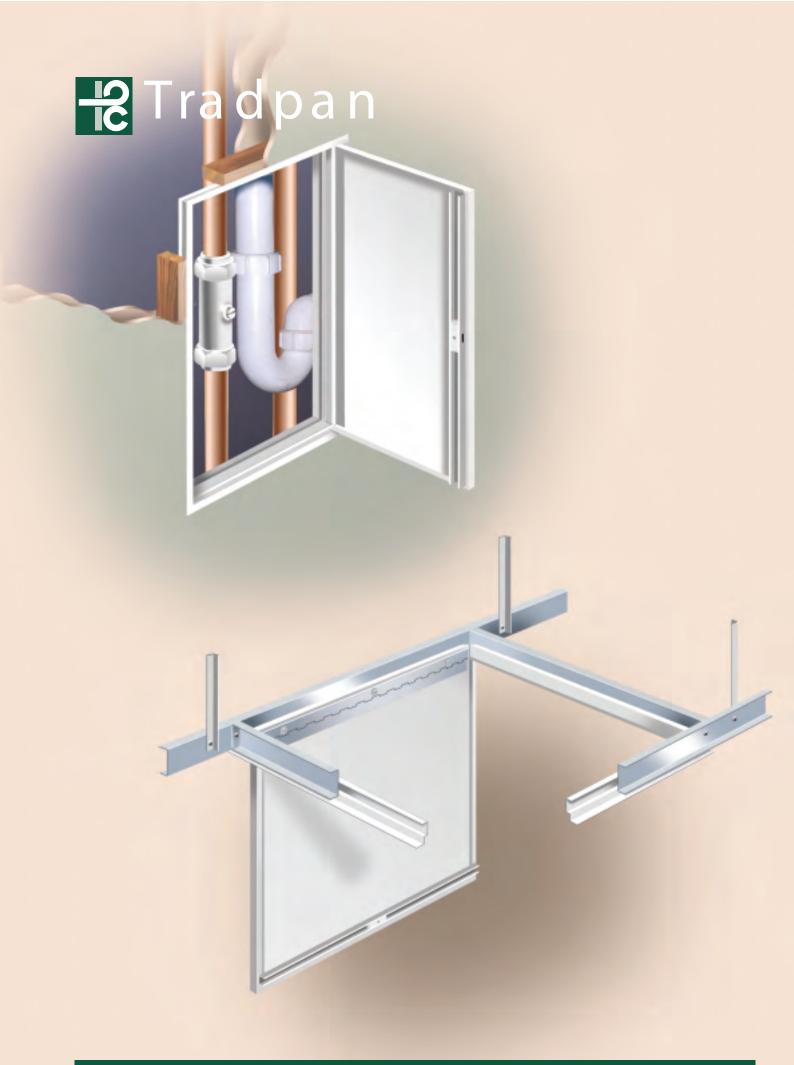

Tradpan PF Tradpan SBF

PANELCRAFT ACCESS PANELS have developed the TRADPAN RANGE to provide an effective solution to gain access to building engineering services concealed in wall cavities or ceiling voids.

Availability

Standard sizes EX STOCK for Next Day
Delivery


BESPOKE SIZES MADE TO ORDER Acoustic Panels and Air Handling Panels also available manufactured to suit specification.


S	ta	n	d	а	rd	S	iΖ	e s	
---	----	---	---	---	----	---	----	-----	--

Н		W	Н		W	
200	Χ	200	600	Χ	600	
300	Χ	300	800	Χ	800	
450	Χ	450	900	Χ	550*	
550	Χ	550*	1200	Χ	550*	
600	Χ	300	2000	Χ	550*	


*To fit between 600 mm centre studs

- Non-fire rated.
- ❖ 50 m m overall depth
- Versatile panel suitable for walls and ceilings avoiding confusion when ordering or fitting on site
- Precision manufactured in Zintec.
- Aluminium panels for high humidity areas available to order
- Fully concealed full length heavy duty piano hinge
- Visible picture frame (PF) or simulated beaded frame (SBF) for taping and jointing to conceal the frame.
- Supplied powder coated RAL 9010 20% gloss as standard
- Budget lock as standard
- Keylock or security lock options available depending on specification
- No on site manufacturing costs
- * Easily installed in minutes straight from the box
- Suitable for on-site decoration to match the surrounding areas if required
- Door easily removed

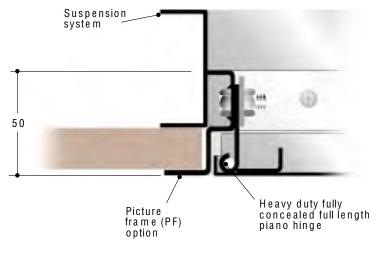











Firepan Magna PF60 Firepan Magna PF120 Firepan Magna SBF60 Firepan Magna SBF120


PANELCRAFT ACCESS PANELS have developed the FIREPAN MAGNA RANGE these are double door panels to complement the Firepan Range, providing an effective solution to gain access to building engineering services concealed in wall structures which serve fire protection or separation purposes.

Availability Bespoke panels made to order


Sizes

Maximum Size 2000mm x 1200mm

- Fire rated.
- Designed for walls only
- Provides 60 min or 120 min Fire Protection for walls
- Provides 60 min or 120 min Fire Integrity from both sides for walls only
- ♦ 50 m m overall depth
- Precision manufactured in Zintec.
- Fully concealed full length heavy duty piano hinge
- Visible picture frame (PF) or simulated beaded frame (SBF) for taping and jointing to conceal the frame
- Supplied powder coated RAL 9010 20% gloss as standard
- Budget lock as standard
- Key lock or security lock options available depending on specification
- No on site manufacturing costs
- Easily installed in minutes straight from the box
- Suitable for on-site decoration to match the surrounding areas if required
- Doors easily removed

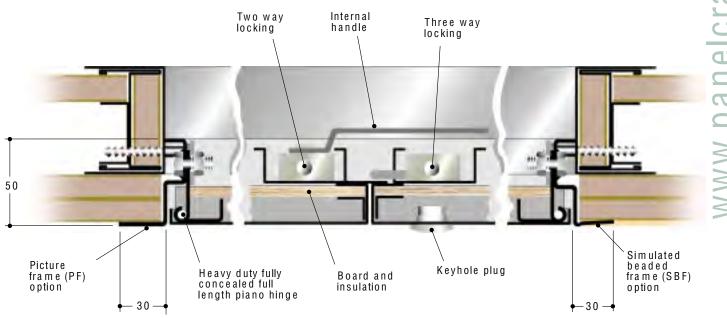

Plastapan

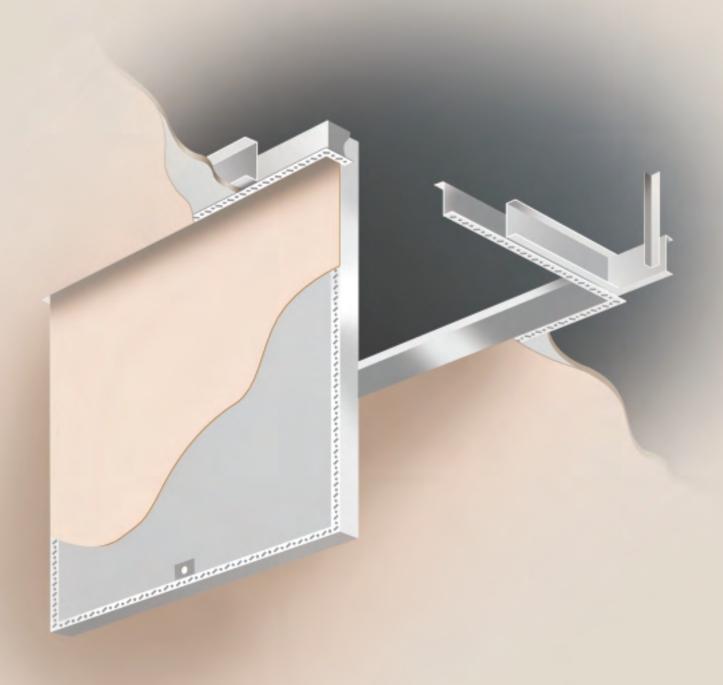

Plastapan SBF

PANELCRAFT ACCESS
PANELS have developed the
PLASTAPAN RANGE
incorporating plasterboardfaced doors due to the
preferences of some building
specifiers. Designed as an
effective solution to gain
access to building engineering
services concealed behind
jointless plasterboard ceiling
systems.


Availability

Standard sizes EX STOCK for Next Day Delivery

Standard Sizes

H W 300 x 300 450 x 450 600 x 600

- ❖ Fire Rated and Non-Fire Rated
- Designed for ceilings only
- 50mm overall depth
- Precision manufactured in Zintec.
- Door has integrated simulated bead for taping and jointing complete with factory fitted plasterboard
- Simulated beaded frame (SBF) for taping and jointing to conceal the frame.
- Supplied powder coated RAL 9010 20% gloss as standard
- Budget lock as standard
- Keylock or security lock options available depending on specification
- No on site manufacturing costs
- Easily installed in minutes straight from the box
- Suitable for on-site decoration to match the surrounding areas
- Door easily removed without use of tools

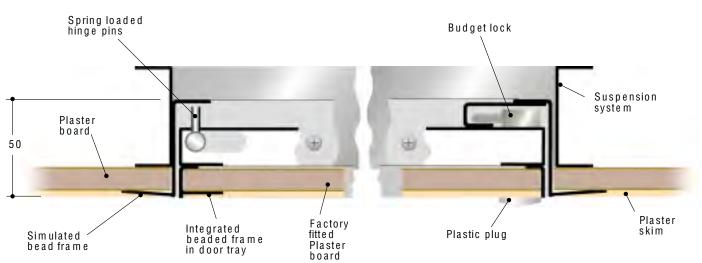





















Panelcraft Access Panels Limited

UNIT H, THE PAVILIONS, ABELES WAY HOLLY LANE INDUSTRIAL ESTATE ATHERSTONE WARWICKSHIRE CV9 2QZ t: 01827 720830 f: 01827 720860 e: sales@panelcraftaccesspanels.com www.panelcraftaccesspanels.com

BESPOKE ACCESS PANELS • BULKHEADS • LIGHT TROUGHS • ARCHITECTURAL SHEET METALWORK