

# Hose clamps



## The Ezyklik hose clamp

Specially designed for hose clamping applications where space is restricted, the new Ezyklik (patent pending) hose clamp offers the convenience of the Herbie Clip with a narrower head.

The unique design of the Ezyklik ensures strong, reliable clamping with the added security of a special interlocking head to ensure that the Ezyklik maintains clamping integrity in the most arduous applications.

Manufactured from Nylon 6.6.\* the Ezyklik has the following characteristics:

- No moving parts - will not seize
- Low profile head will fit into small spaces
- Full installation tooling support
- Choice of installation - pre-fit onto hose or wrap around once the hose is in place
- Can be quickly released using pliers
- Lightweight and easy to use
- No sharp edges to cut the operator
- Strong UV resistance
- Temperature range -40°C to +150°C
- Seals hosework up to 8 bar (depending on hose and fitting)
- UL listed

Because of the non-existent dynamic range of the Ezyklik, each size is made on a case by case basis. If you feel you have an application that would be ideally suited for this product please send us a sample of the hose and spigot that you are using. We will then design free of charge\*\* an Ezyklik to fit your application. The following sizes are already in production and we expect many more to be added in the short term.


\*The Ezyklik will be available on request in Polypropylene.

\*\* Dependant on estimated annual volume.

**NEW**



Ezyklik manual and pneumatic installation tools.

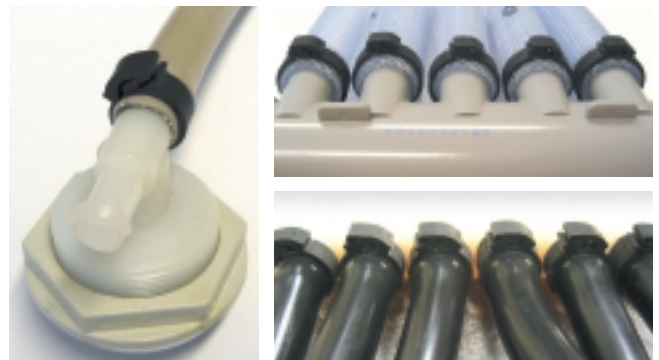

These photographs illustrate how the unique design of the Ezyklik allows for secure and reliable hose clamping in restricted spaces.

A	B	C	D	Clip mass (g)
Closed diameter (mm)	Head height (mm)	Open head width (mm)	Closed head width (mm)	
14.5	6.8	20.7	14.2	1.4
15.0	6.7	20.1	14.1	1.4
15.7	6.7	20.4	14.0	1.4
16.5	6.7	20.4	13.9	1.4
17.1	6.7	20.6	14.0	1.5
17.5	6.6	20.5	14.0	1.5
25.8	6.7	21.2	14.5	2.0
26.8	6.9	21.6	14.5	2.1

