

## Stone Carpet System

### Description


A heavy duty decorative quartz trowelled methyl methacrylate screed typically laid at 4 – 6mm. Degafloor Stone Carpet encapsulates natural aggregates, coloured aggregates and finest marble chips in a clear resin matrix.

### Typical installation areas

- Retail
- Pubs and clubs
- Leisure Venues
- Public Walkways
- Vehicle Dealerships
- Residential Housing Developments



### System Overview

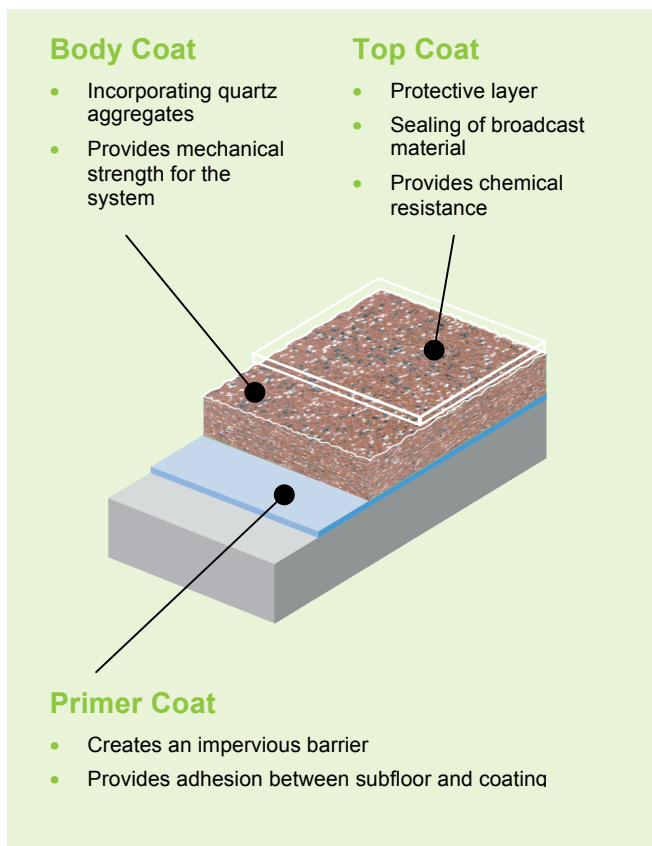

### Stone Carpet Features & Benefits

- **Degafloor cures fully in 2 hours at temperatures down to -30° C.** *Minimum downtime, rapid refurbishment, fast track new builds.*
- **Exceptional bond to existing substrates and a chemical bond between layers creates a truly monolithic floor.** *Durability, longevity, ability to overlay existing floors.*
- **Exceptional resistance to UV light, weathering, chemical and physical attack.** *Capable of withstanding almost any internal or external environment.*
- **Tailored slip resistant finishes.** *Degree of slip resistance can be varied depending on the environment and specific requirements.*
- **Elastic and does not shrink.** *Resistant to cracking, minimal joints creating better detailing.*

## System overview

<b>Product Specification:</b>	Degafloor® Stone Carpet
<b>Substrate:</b>	
<b>Colour:</b>	
<b>Nominal Thickness:</b>	4 - 6mm
Preparatory work and installation in accordance with supplier instructions	
<b>Supplier:</b>	Degafloor Ltd +44 (0)1778 342 545
<b>Installation:</b>	By approved Degafloor installation partner

## Colour Range

A vast range of unique and bespoke options can be provided to meet the exact requirements of any project. Please call to discuss your requirements.

## Purpose

Ideal for heavily trafficked areas, that require outstanding natural looking aesthetics.

## Properties

Exhibits outstanding mechanical strength and a high resistance to chemicals in addition to being resistant to UV-aging and cracking. Options can be provided that offer outstanding slip resistance.

## Health and Safety

All resins are manufactured to DIN EN ISO 14001 : 1996 standards and comply with all current EU hygiene of foodstuffs regulation. All resins are non-toxic and certified to confirm physiological inoffensiveness.

## Technical Advice

For further information on any Degafloor product please call our Technical Services Team.

## Cleaning and Maintenance

The most efficient way of cleaning Degafloor systems would be to use a rotary scrubber dryer, with the facility to rinse and vacuum. To arrange a free demonstration please call our Technical Services Team.

## Warranty

All Degafloor warranties are bespoke and tailored for each installation. Our technical services team, in conjunction with our installation partners will agree with the customer a warranty for each project based on the specific installation environment.

## Disclaimer

Degafloor Ltd endeavours to ensure that all information and advice given is accurate and correct. However, the company cannot take responsibility for the selection of products for specific applications. Therefore any prospective customers should satisfy themselves that the product is suitable for the environment in which it will be installed.

Accordingly, Degafloor cannot take responsibility for the selection, by others, of a product unsuitable for the application. The information detailed in this leaflet is liable to change without prior notification.

**T:** +44 (0) 1778 342545  
**F:** +44 (0) 1778 380912  
**E:** marketing@degafloor.com

**Degafloor Ltd**  
Crusader House, High Street,  
Maxey, Peterborough  
PE6 9HQ, UK

