



PIPE EQUIPMENT SPECIALISTS LTD

PIPE STANDS



WWW.TAG-PIPE.COM • +44 (0)1869 324144

PIPE EQUIPMENT SPECIALISTS LTD


TRI-STANDS


Three leg height adjustable pipe stands for all pipework applications

TAG Pipe Equipment Specialists manufactures pipe stands that have been designed to give you the highest quality at the best price.

The Tri-Stands are constructed from box section and are available with a variety of different head styles to suit any application

Features and advantages

- 1 1/8" Square box section construction
- 1,000kg / 2,205lbs load capacity
- Choice of fixed base or folding leg base
- Folding legs allow for easy storage and transportation
- Comprehensive range of 9 different head styles
- Adjustable in height from 27"-48" (71cm-122cm)
- Independently load tested
-  rated & certified

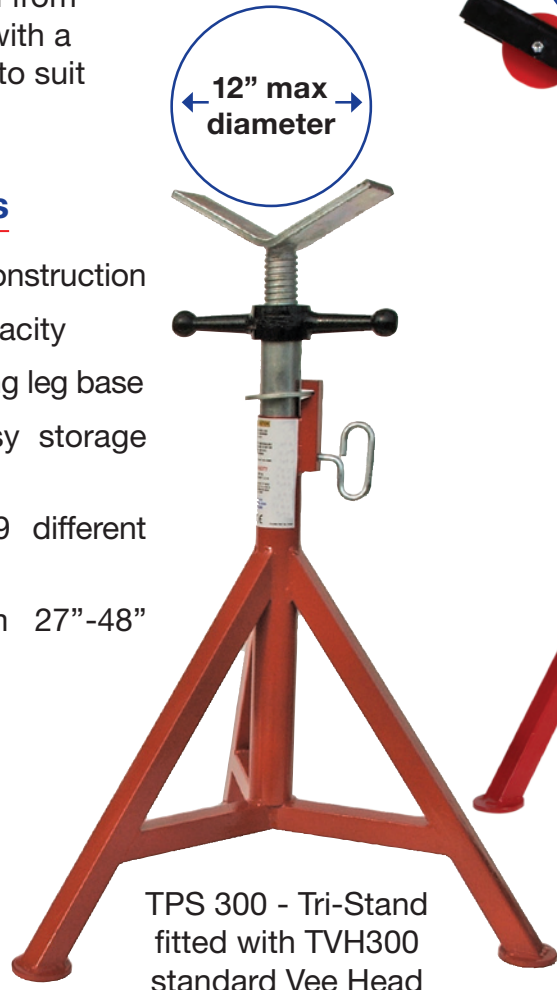

TRI-STAND HEAD OPTIONS

**Tri-Stand
(Base Only)**



PART NO.	LOAD CAPACITY KG / LBS	WEIGHT KG / LBS	PIPE SIZE
TPS300	1,000 / 2,205	7.6 / 17	1"-24"

**Folding Tri-Stand
(Base Only)**



PART NO.	LOAD CAPACITY KG / LBS	WEIGHT KG / LBS	PIPE SIZE
TFS301	1,000 / 2,205	7.6 / 17	1"-24"

Vee-Head



PART NO.	LOAD CAPACITY KG / LBS	WEIGHT KG / LBS	PIPE SIZE
TVH300	1,000 / 2,205	3.4 / 7	up to 12"

Large Vee-Head (See page 7 for Head options)



PART NO.	LOAD CAPACITY KG / LBS	WEIGHT KG / LBS	PIPE SIZE
QVH400	1,000 / 2,205	7.6 / 17	up to 24"

**Steel Wheel
(Slip on style)**



PART NO.	LOAD CAPACITY KG / LBS	WEIGHT KG / LBS	PIPE SIZE
SWH300	450 / 990	3.4 / 7	1"-12"
SWH300/SS*	450 / 990	3.4 / 7	1"-12"

Steel Wheel



PART NO.	LOAD CAPACITY KG / LBS	WEIGHT KG / LBS	PIPE SIZE
SWH350	1,000 / 2,205	4.9 / 11	1"-24"
SWH350/SS*	1,000 / 2,205	4.9 / 11	1"-24"

**Nylon Wheel*
(Slip on style)**



PART NO.	LOAD CAPACITY KG / LBS	WEIGHT KG / LBS	PIPE SIZE
NWH300*	450 / 992	2 / 5	1"-12"

Nylon Wheel*



PART NO.	LOAD CAPACITY KG / LBS	WEIGHT KG / LBS	PIPE SIZE
NWH350*	450 / 990	3.3 / 7	1"-24"

**Ball Transfer
(Slip on style)**



PART NO.	LOAD CAPACITY KG / LBS	WEIGHT KG / LBS	PIPE SIZE
BTH300	450 / 990	2.5 / 6	1"-12"
BTH300SS*	450 / 990	2.5 / 6	1"-12"

**Stainless Steel
(Slip on style*)**




PART NO.	LOAD CAPACITY KG / LBS	WEIGHT KG / LBS	PIPE SIZE
SSH300*	1,000 / 2,205	1.0 / 2	1"-12"

Roller Bar



PART NO.	LOAD CAPACITY KG / LBS	WEIGHT KG / LBS	PIPE SIZE
RBH300	1,000 / 2,205	4.25 / 9	1/8"-10" Flat

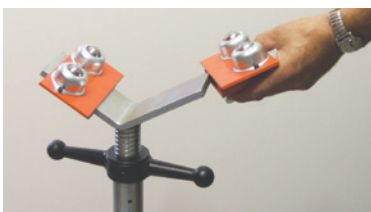

**Slip on style
heads**

*Suitable for stainless steel

DUO STANDS


**NEW IMPROVED
DESIGN**


Heavy duty four leg height adjustable style pipe stands

The Duo is height adjustable and uses quick change style heads. Designed for large diameter pipe rotation and feeding. With lock brakes on the wheels to secure the load for marking, layout or fit-up.

Now supplied with folding legs as standard for ease of use and transport.

Features and advantages

- Load capacity 2,400kg / 5,290lbs
- Folding legs for ease of transport and storage
- Self centering head adjustment from either side
- Height adjustable 29"-43" (74cm-109cm)
- 1/2 to 48" (12-900 mm) pipe diameter capacity
- Quick height adjustment with additional fine thread for workpiece levelling
- 'Trued' wheels eliminate 'corkscrewing' of pipe during rotation
- Lockable wheels to hold pipe in position
- Safety pins to lock stand at working height
-  rated & certified

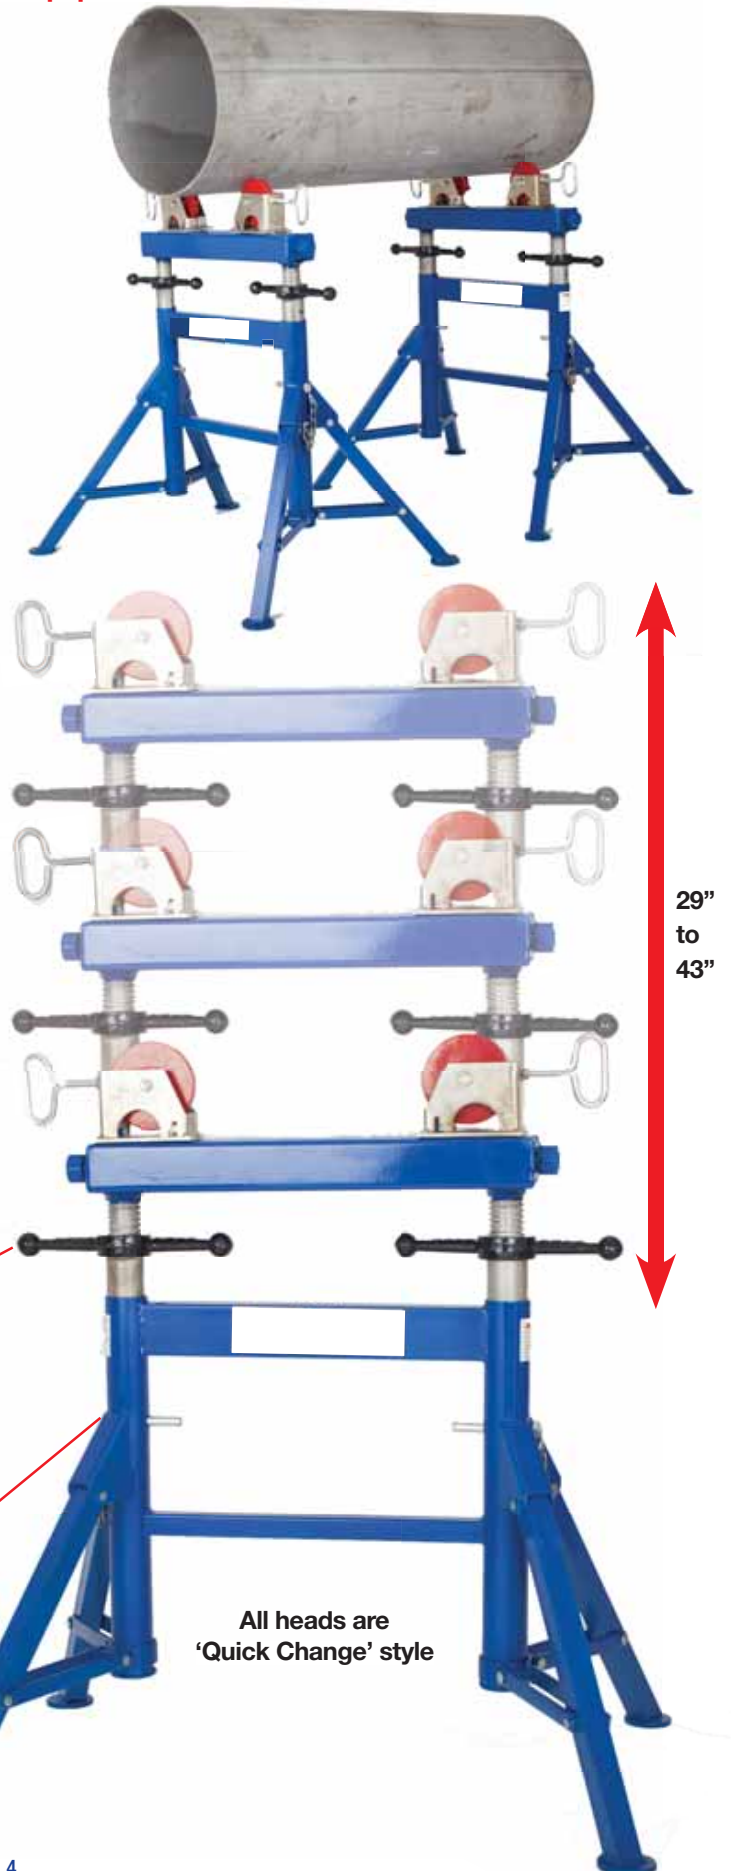

The Duo Stand now utilises the fine adjustment thread from the Tri-Stand and Quattro-Stand.

This allows precise adjustment of the working height and can compensate for uneven surfaces to ensure pipe is level at all times



The unique safety locking pins allow the Duo Stand to be fixed at the various working heights.

Final adjustment and levelling can then be made with the fine adjustment handle.



DUO-STAND HEAD OPTIONS



The Quick Change style heads increase the versatility of the duo stand.

The heads can be changed in a matter of seconds, without tools, to adapt to almost any applications.

Roller wheels are available in steel, stainless steel or nylon. Ball transfer heads suitable for carbon or stainless steel pipe are also available.



Simple head changeover

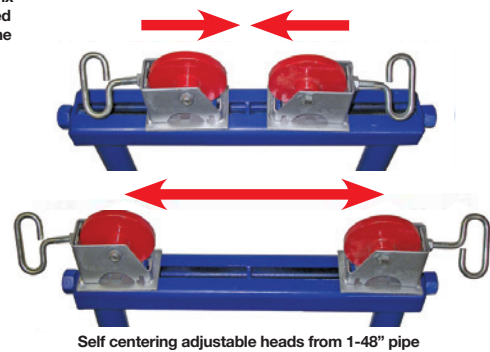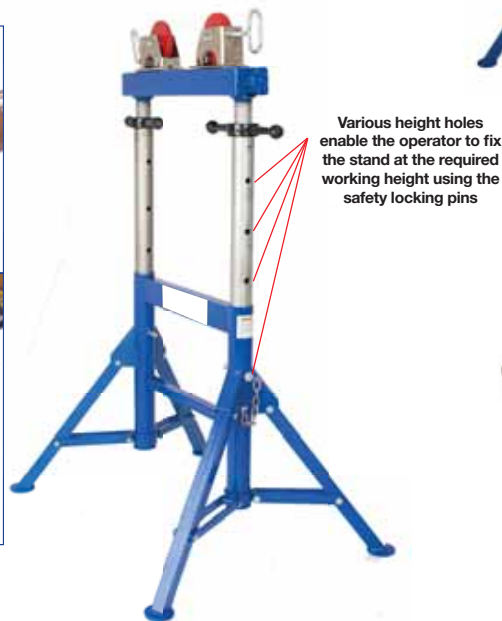

PART NO.	HEAD STYLE	LOAD CAPACITY KG / LBS	WEIGHT KG / LBS
DPS200	Base unit only	2,400 / 5,290	19.5 / 43
SWH200	Pair Steel Wheel Head	2,400 / 5,290	3 / 6
SWH200/SS*	Pair Stainless Steel Wheel Head	2,400 / 5,290	3 / 6
NWH200*	Pair Nylon Wheel Head	450 / 990	2.2 / 5
BTH200	Pair Ball Transfer Head	1,450 / 3,197	3 / 6
BTH200/SS*	Pair Ball Transfer Head	1,450 / 3,197	3 / 6

*Suitable for stainless steel



Nylon Wheel Head (NWH200)



Ball Transfer Head (BTH200)



Steel Wheel Head (SWH200)

QUATTRO STANDS


Heavy duty pipe stands for large diameter and heavy wall pipe

The Quattro Heavy Duty Pipe Stands are the ideal solution for heavy duty pipe handling, in the workshop or for site applications.

The Large Vee Head, heavy duty base and variety of head options make the Quattro the most durable and versatile pipe stand on the market.

The Quattro stand can be used as a simple jack stand, supplied as standard with levelling pads to accommodate uneven working surfaces. Weight load tested to 1225kg / 2,700lbs per stand, the Quattro stands can also be supplied with lockable castor wheels so pipes of up to 36" diameter and any length can be moved around a workshop or site, without using a crane or forklift.

Features and advantages

- Load capacity 1,225kg / 2,700lbs
- Variety of head options
- Optional castor wheel for pipe transportation
- Height adjustable
- Suitable for carbon or stainless steel
-  rated & certified




Large Vee-Head shown with SWH400 steel wheels fitted

Shown with RWK400 roller wheel kit fitted



Levelling pads supplied as standard



Transport pipe around the site or workshop with ease

QUATTRO STAND OPTIONS

Base Unit (complete with levelling pads)



PART NO.	LOAD CAPACITY KG / LBS	WEIGHT KG / LBS	PIPE SIZE
QPS400	1,225 / 2,700	10 / 22	N/A

Large Vee-Head



PART NO.	LOAD CAPACITY KG / LBS	WEIGHT KG / LBS	PIPE SIZE
QVH400	1,225 / 2,700	8.5 / 19	1"-36"

Steel and stainless steel Wheels

These four-Wheel kits can be fitted into the QVH400 large V-head to enable pipe to be rotated. Steel and stainless steel wheels are available to suit all applications.



*Suitable for stainless steel

PART NO.	LOAD CAPACITY KG / LBS	WEIGHT KG / LBS	PIPE SIZE
SWH400	1,200 / 2,645	4 / 8	1"-36"
SWH400/SS*	1,200 / 2,645	4 / 8	1"-36"

Steel Wheels

Consists of two 1-1/2" roller balls which can be mounted in vee-head slots for a range of up to 36" (915mm) pipe.



*Suitable for stainless steel

PART NO.	LOAD CAPACITY KG / LBS	WEIGHT KG / LBS	PIPE SIZE
BTH400	1,200 / 2,645	2.3 / 5	1"-36"
BTH400/SS*	1,200 / 2,645	2.3 / 5	1"-36"

Nylon Wheel

The kit consists of four nylon wheels that can be mounted into the 12" (30cm) vee-head, to enable the Quattro Stand to be used with stainless steel without the risk of marking the pipe.



*Suitable for stainless steel

PART NO.	LOAD CAPACITY KG / LBS	WEIGHT KG / LBS	PIPE SIZE
NWH400	450 / 990	1.8 / 4	1"-36"

Stainless Steel Sleeves

When working with stainless steel pipe, the sleeve option instantly converts the Quattro Stand into a speciality tool for stainless steel welding, preventing carbon contamination.



*Suitable for stainless steel

PART NO.	LOAD CAPACITY KG / LBS	WEIGHT KG / LBS	PIPE SIZE
SSS400	1,200 / 2,645	1 / 2	1"-36"

Hold Down Device

The Hold-Down Device uses high tensile strength for gripping pipe onto the large vee-head when either welding or using the Quattro stand for pipe transportation. Chain extension kits available for pipe up to 36" (101cm)



PART NO.	LOAD CAPACITY KG / LBS	WEIGHT KG / LBS	PIPE SIZE
HDD400	N/A	7 / 16	1"-36"

Roller Wheel Kit

Four 8" (20cm) heavy duty wheels make up the Quattro Stand Roller Wheel Kit. The wheels have a quick action brake system.



*Depending on head style

PART NO.	LOAD CAPACITY KG / LBS	WEIGHT KG / LBS	PIPE SIZE
RWK400	1,225 / 2,700**	11 / 24	N/A


UNO STANDS



The UNO STAND is a basic single tubed pipe stand, simple to use and easy to set-up.

A favourite for low level work in all fab shops. Available in 4 standard heights from 7" (18cm) to 28" (72cm).

Optional roller heads from the Tri-Stand series (page 3) can also be fitted to the Vee head of the UNO Stand to suit varying applications.



PART NO.	MIN/MAX HEIGHT INCHES	MIN/MAX HEIGHT METRIC
UPS01	7"-10.25"	175-260mm
UPS02	10"-15.5"	250-395mm
UPS03	15.5"-22.5"	395-570mm
UPS04	21.5"-28"	545-715mm



TRI STAND WITH CHAIN VICE

A simple but effective solution to small bore pipe handling in the field



Optimised Base For More Working Area – Benders are located at the rear of the base and three tool hangers are provided.

Integrated Ground Lug – Provides a conductive surface to connect the weld ground.

Self Hooking for 4" Pipe – No need to use a second hand to engage the chain into the wear plate.



Leg Chain – Retains legs even when subjected to rugged use during operation and transport.

Rugged Tool Tray – Prolonged stability before requiring a leg adjustment.

PART NO.	PIPE CAPACITY	WEIGHT KG / LBS	WORKING HEIGHT CM
TSWV6	1/8"-6"	21 / 46	91

ROLLER STANDS


These heavy duty stands are designed to be either floor or bench mounted. Available with 4 head styles to suit pipes from 4" to 48"

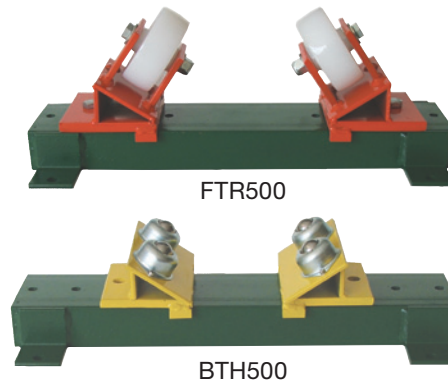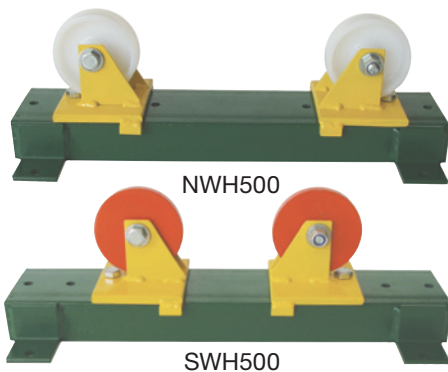

PART NO.	HEAD STYLE	LOAD CAPACITY KG / LBS	WEIGHT KG / LBS
RPS500	Base unit only	2,200 / 4,850	5.8 / 13
SWH500	Pair steel wheel heads	2,200 / 4,850	3.4 / 7
SWH500 SS*	Pair stainless steel wheel heads	2,200 / 4,850	3.5 / 7
NWH500*	Pair nylon wheel heads	450 / 990	2.2 / 5
BTH500	Pair ball transfer heads	1,450 / 3,197	3.8 / 8
BTH500 SS*	Pair stainless steel ball transfer heads	1,450 / 3,197	3.8 / 6
S/FTR500	Pair feed through roller	2,200 / 4,850	3.5 / 6
SS/FTR500	Pair stainless steel feed through roller	2,200 / 4,850	3.5 / 8
N/FTR500*	Pair nylon feed through roller head	450 / 990	3.0 / 7

*Suitable for stainless steel

QUICK CHANGE ROLLER STANDS

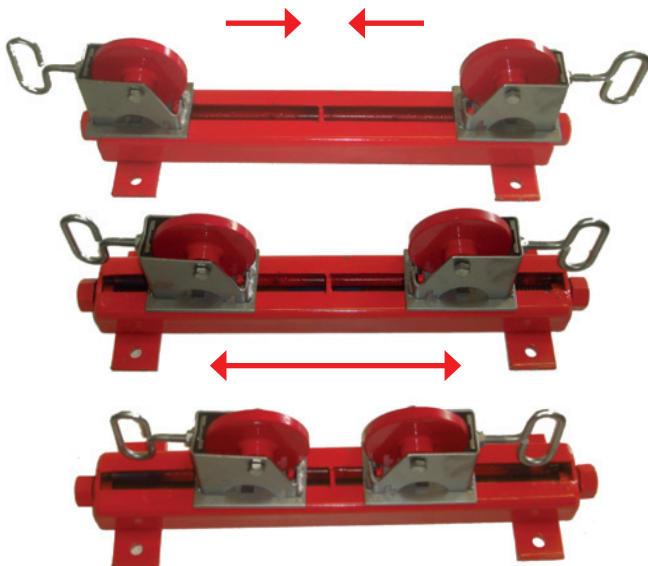

All heads are 'Quick Change' style

Fully adjustable heads from 1"- 48" pipe.

With brakes to lock loads for fit-up.



BTH501



SWH501

PART NO.	HEAD STYLE	LOAD CAPACITY KG / LBS	WEIGHT KG / LBS
QCR501	Base unit only	2,450 / 5,401	5.9 / 13
SWH501	Pair steel wheel heads	2,450 / 5,401	3.8 / 8
SWH501/SS*	Pair stainless steel wheel heads	2,450 / 5,401	3.8 / 8
NWH501*	Pair nylon wheel heads	450 / 990	2.2 / 5
BTH501	Pair ball transfer heads	1,450 / 3,197	3 / 7
BTH501/SS*	Pair stainless steel ball transfer heads	1,450 / 3,197	3 / 7

*Suitable for stainless steel

ROTARY EARTH CLAMP

No more tangled earth leads

Features and advantages

- Attaches and detaches in seconds.
- Makes up earth leads three ways – lug, clamp on and bare cable.

A simple yet effective device eliminates earth lead twisting, tangling and unnecessary wear.


Provides a stable earth for circumferential welding of pipes and fittings and eliminates weld pinholes caused by poor earthing.

Anti-arc bearings take loads of up to 400 amps.




PART NO.	DESCRIPTION	WEIGHT	
		KG	LBS
REC1	Rotary Earth Clamp	1.8	4.0

PIPE FITTERS TOOLS

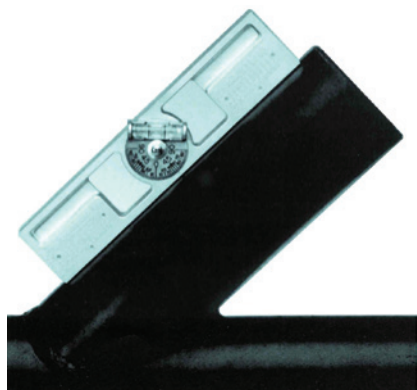

TAG Pipe Equipment Specialists supply a comprehensive range of measuring, marking and layout tools for all pipe fitting and welding applications. The range of products includes: Wrap arounds, contour markers, combination adapters, centering heads, Flange aligners, Radius Markers, burning guides and soapstones. Pipe Ltd offer a complete range of marking, measuring and layout tools and accessories for the Pipe fitter/welder.

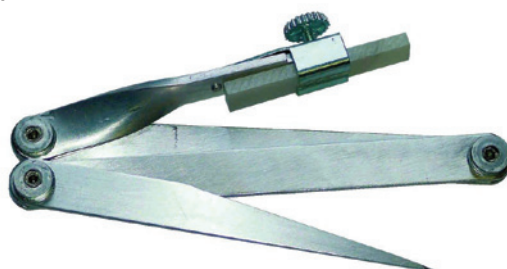

PIPE BUGGY

The safe and easy way to move pipe around the job site

Max Pipe diameter: 12"

Max Pipe length: 6.1m

Max Pipe weight: 450kg / 990lbs

Features:

- Flat free tyres
- Ratchet hold down strap to secure pipe
- Quick disconnecting handle for easy storage

The Pipe Buggy offers a safe method of handling and moving pipes around the workshop or site easily, avoiding damage to the pipe as a result of it being dragged along the ground.

At only 31.8kg / 70lbs it is a light weight yet robust solution to pipe handling problems. With its innovative handle and ratchet strap it allows the operator to lift the pipe from the floor onto the buggy with minimal effort.



Lift easily in 3 simple steps

1
Secure Buggy to pipe in the upside down position using the strap supplied.

2
Use handle for leverage to flip Buggy & pipe.

3
Reposition handle to walk with pipe.

PART NO.	DESCRIPTION	HEIGHT		WIDTH		WIDTH BETWEEN WHEELS		LENGTH		WEIGHT	
		INCH	CM	INCH	CM	INCH	CM	INCH	CM	KG	LBS
PB1	Pipe Buggy	21	53	28	71	16	41	28	71	31.8	82


OTHER PRODUCTS



PIPE BEVELLING MACHINES




PIPE CUTTING MACHINES

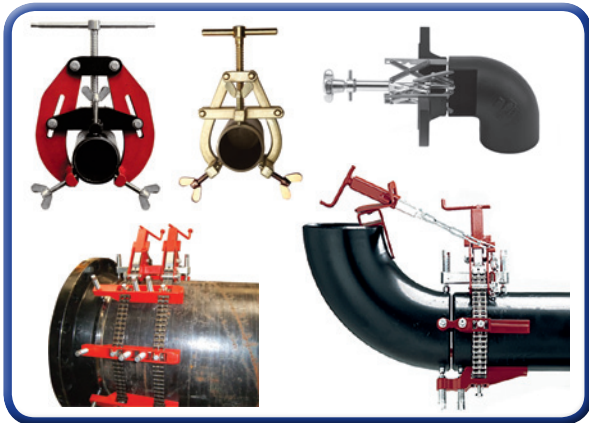

PIPE ALIGNMENT CLAMPS



PIPE PURGING

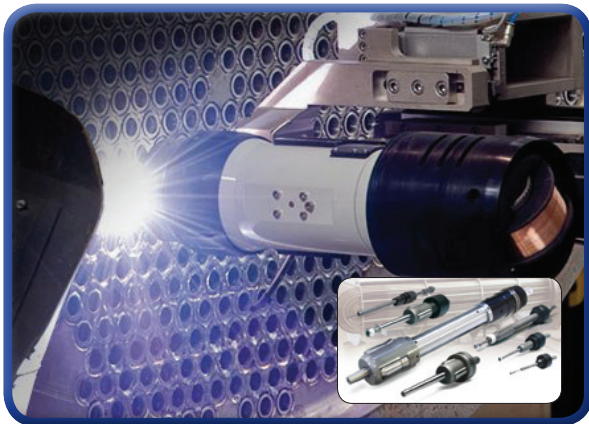

HEAT EXCHANGER MANUFACTURE AND MAINTENANCE EQUIPMENT



PLATE BEVELLERS



PIPE EQUIPMENT SPECIALISTS LTD

Unit L10, Telford Road, Bicester, Oxon, OX26 4LD, England

Tel: +44 (0)1869 324144

email: sales@tag-pipe.com www.tag-pipe.com

Our company policy is one of continuous improvement. Products may change or vary from those illustrated.

WWW.TAG-PIPE.COM • +44 (0)1869 324144

PIPE EQUIPMENT SPECIALISTS LTD