


Grade 8 Quad Master Link Assemblies



- Meets the performance requirements of BS-EN 1677-4.
- Suitable for use with Grade 8 Chains and wire/fibre rope slings.
- Painted finish.
- Alloy steel, quenched and tempered.
- Designed for use with 3 or 4 leg slings.
- Welded
- Proof load 2.5 times the W.L.L.
- Minimum break load 4 times the W.L.L.
- S/T ranges have large inside widths & lengths to allow for sling hardware and crane hooks.

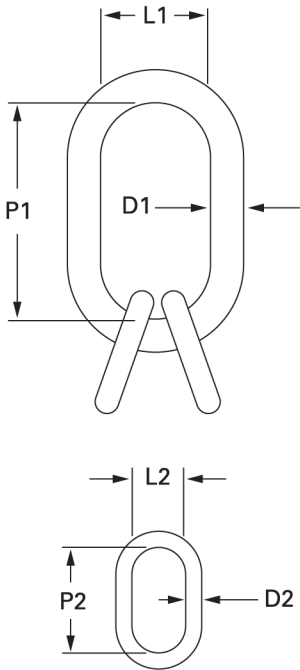

code	W.L.L (tonnes)	part no.	D 1 (mm)	P 1 (mm)	L 1 (mm)	D 2 (mm)	P 2 (mm)	L 2 (mm)	weight (kgs/each)
K0811	4.15	S/T-7-8	20	160	95	15	120	70	2.21
K0817	5.35	S/T-8-8	23	160	110	16	140	80	3.03
K0812	9.40	S/T-10-8	27	190	110	20	160	95	5.07
K0813	14.20	S/T-13-8	33	230	130	27	190	110	10.08
K0814	22.30	S/T-16-8	38	275	150	33	230	130	17.06
K0815	33.40	S/T-20-8	45	340	180	38	275	150	27.8
K0816	40.30	S/T-22-8	50	350	190	45	340	180	42.2
K0801	3.15	W-7-8	19	135	75	13	60	38	1.35
K0802	6.70	W-10-8	27	180	100	18	85	40	3.58
K0803	11.20	W-13-8	33	200	110	23	115	50	6.57
K0804	17.00	W-16-8	36	260	140	27	140	65	10.3
K0805	26.50	W-20-8	45	340	180	33	150	70	19.3
K0806	31.50	W-22-8	50	350	190	36	170	75	25.1

NEVER EXCEED MAXIMUM CAPACITY

Ensure operator follows safe use instruction guidelines