


Multi Purpose Acoustic Mat

Data Sheet | June 2014

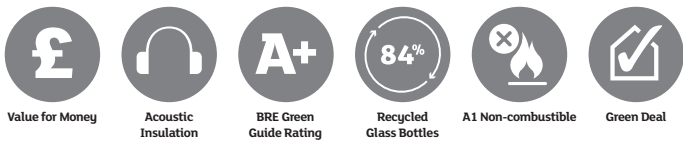


Product dimensions and information				
Thickness (mm)	Length (m)	Width (mm)	Area (m ²)	Code
25	22.50	1200	27.00	5525
25	22.50	2x600	27.00	5526
50	13.00	1200	15.60	5551
50	13.00	2x600	15.60	5552

24 rolls per pallet

Multi Purpose Acoustic Mat is a glass wool roll designed to be used as an absorbent layer in timber and metal stud partitions and in separating walls and floors in accordance with Part E (England and Wales) and Section 5 (Scotland) acoustic requirements.

Multi Purpose Acoustic Mat | Typical Applications

Timber and metal stud partitions and separating walls and floors.

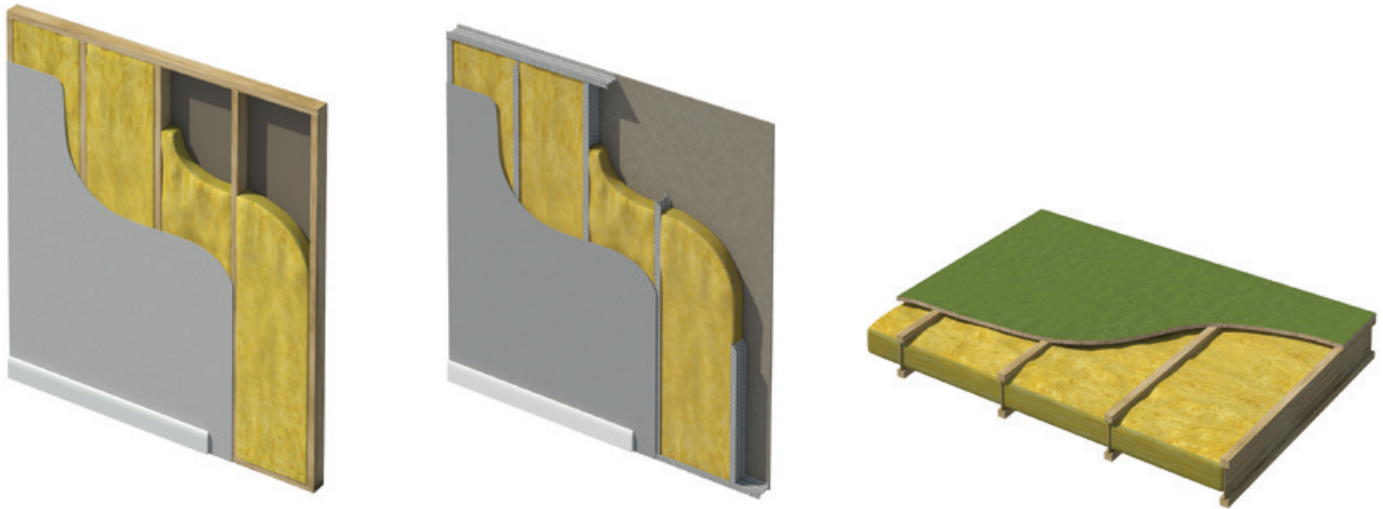

Environmental

Multi Purpose Acoustic Mat is classified as having zero ODP (Ozone Depletion Potential) and zero GWP (Global Warming Potential). They are also CFC and HCFC free.

Durability

Multi Purpose Acoustic Mat is non-hygroscopic, will not rot, degrade or sustain vermin and will not encourage the growth of mould, bacteria or fungi.

Standards

Multi Purpose Acoustic Mat is manufactured in accordance with BS EN 13162: 2012, BS EN 13172: 2012 and ISO 9001 Quality Management Systems. Also manufactured to comply with the requirements of CE Marking 93/68/EEC.

Fire Classification

Multi Purpose Acoustic Mat is classified as non-combustible with a Reaction to Fire Classification A1 when tested to BS EN 13501-1.

Vapour Resistance

Multi Purpose Acoustic Mat possess negligible vapour resistance allowing vapour to pass freely through the insulation.

Handling & Storage

Multi Purpose Acoustic Mat is supplied compression packed in polythene to provide short term protection and for long term protection, the product must be stored indoors or under a waterproof covering in order to protect against weather damage. Multi Purpose Acoustic Mat should not be left permanently exposed to the elements.

Associated Products

Multi Purpose Acoustic Roll
Multi Purpose Acoustic Slab
Sound Deadening Mat

Superglass Certification



FM02264

Superglass Insulation Limited

Kerse Road, Thistle Industrial Estate, Stirling, Scotland FK7 7QQ

TECHNICAL

Hotline: 0844 381 4022

Email: technical@superglass.co.uk

Fax: 01786 451245

SALES

Tel: 01786 402013 / 01786 402014

01786 402015 / 01786 402016

Email: sales@superglass.co.uk

Fax: 01786 451245

www.facebook.com/superglassinsulationltd

www.twitter.com/superglassins

www.linkedin.com/company/superglass-insulation-ltd

For further information, product sheets, alternative dimensions or facings please contact the Technical Hotline on 0844 381 4022.

Please note - all dimensions are nominal.

Your insulation team
Superglass