


Timber & Rafter Roll 32

Data Sheet | June 2014

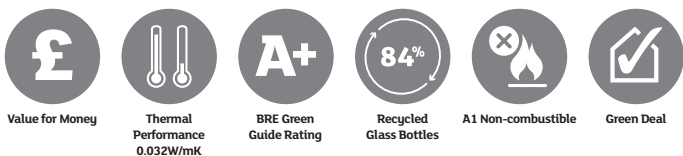


Product dimensions and information					
Thickness (mm)	Length (m)	Width (mm)	Area (m ²)	R-Value (m ² K/W)	Code
70	5.00	2x570	5.70	2.15	3654
90	3.90	2x570	4.45	2.80	3658

24 rolls per pallet

Timber & Rafter Roll 32 is a resilient glass wool roll designed to give thermal and acoustic insulation for timber-framed roofs and walls. The rolls are self supported by friction fitting between timber studs.

Timber & Rafter Roll 32 | Typical Applications

Roof and walls of studded construction in timber-framed buildings.

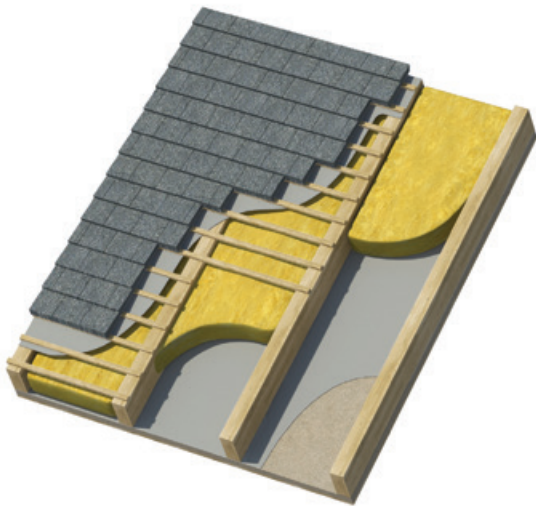

Environmental

Timber & Rafter Roll 32 is classified as having zero ODP (Ozone Depletion Potential) and zero GWP (Global Warming Potential). They are also CFC and HCFC free.

Durability

Timber & Rafter Roll 32 is non-hygroscopic, will not rot, degrade or sustain vermin and will not encourage the growth of mould, bacteria or fungi.

Standards

Timber & Rafter Roll 32 is manufactured in accordance with BS EN 13162: 2012, BS EN 13172: 2012 and ISO 9001 Quality Management Systems. Also manufactured to comply with the requirements of CE Marking 93/68/EEC.

Fire Classification

Timber & Rafter Roll 32 is classified as non-combustible with a Reaction to Fire Classification A1 when tested to BS EN 13501-1.

Vapour Resistance

Timber & Rafter Roll 32 possess negligible vapour resistance allowing vapour to pass freely through the insulation.

Handling & Storage

Timber & Rafter Roll 32 is supplied compression packed in polythene to provide short term protection and for long term protection, the product must be stored indoors or under a waterproof covering in order to protect against weather damage. Timber & Rafter Roll 32 should not be left permanently exposed to the elements.

Associated Products

Timber & Rafter Roll 40
Timber & Rafter Roll 35

Superglass Certification



Superglass Insulation Limited

Kerse Road, Thistle Industrial Estate, Stirling, Scotland FK7 7QQ

TECHNICAL

Hotline: 0844 381 4022

Email: technical@superglass.co.uk

Fax: 01786 451245

SALES

Tel: 01786 402013 / 01786 402014

01786 402015 / 01786 402016

Email: sales@superglass.co.uk

Fax: 01786 451245

www.facebook.com/superglassinsulationltd

www.twitter.com/superglassins

www.linkedin.com/company/superglass-insulation-ltd

For further information, product sheets, alternative dimensions or facings please contact the Technical Hotline on 0844 381 4022.

Please note - all dimensions are nominal.

Your insulation team
Superglass