


Hanvon[®]

digital art • digital life



*Enrich human life with good taste and
efficiency by digital technology*

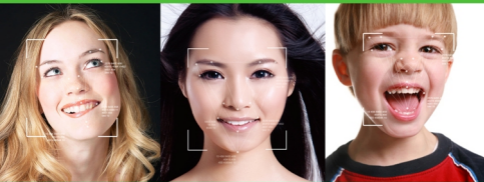

Dual Sensor™

The first Embedded facial recognition system in the world



The most sophisticated facial recognition solution

Hanvon®
digital art · digital life

- > Accurate
- > Standalone
- > User Friendly
- > Reliable performance
- > Multi-factor Authentication
- > Trackable
- > Contactless

The first Embedded facial recognition system in the world

Features:



Embedded facial recognition system

- Adopt US advanced DSP technology keeps processing and matching right on the device
- Standalone application as Time attendance, Access control, User identification



Accurate and Fast Identification

- Industrial Leading "Dual Sensor" Facial Recognition Algorithm, FAR<0.0001%
- 1.Many up to 1400 users less than 1 second



User friendly design

- 3.5 inch color screen for face positioning
- Contactless authentication for the ultimate in hygienic
- Voice prompt



Reliable performance under different environments

- Different source-light Technology
- The system can work in different light condition even in the dark
- Over one year Chinese market testing



High Usability and Security

- Failure to enroll and acquire rate is less than 0.0001%
- Incident trackable for security with photo



Large user and log capacity

- User capacity from 500 to 1400
- Over 150,000 logs and optional image capacity over 70,000



Flexible I/O interfaces


- Internet Protocol based enables LAN or Network deployment
- USB Host for User data upload or download via USB flash driver
- Wiegand output makes system compatible with different access control panel



Other Functionalities

- Multi authentication methods that able to work with Facial, RFID Cards, Cards+Facial
- Low power consumption, 12Watts in operation, less than 5Watts in resting mode

System Configuration:



The first Embedded facial recognition system in the world

Technical Specification

	FK700	F710
Processor	TI DM CPU 600MHz	TI DM CPU 600MHz
User Capacity	500 Users	500 Users
Record Capacity	150,000 Records	150,000 Access Control Records
Recognition Algorithm	Dual Sensor TM V2.0	Dual Sensor TM V2.0
Sensor	Specialized double sensor	Specialized double sensor
Verification Method	Facial Recognition	Facial Recognition, Card & Facial Recognition
Verification Speed	Less than 1 Second (500 Users)	Less than 1 Second (500 Users)
Keyboard	4*4 Touch Keypad	4*4 Touch Keypad
LCD	3.5 inch TFT Color Screen 65,000 Bright Color 320*240 Resolution	3.5 inch TFT Color Screen 65,000 Bright Color 320*240 Resolution
Communication Method	Standard TCP/IP USB Host	Standard TCP/IP USB Host
Power	12V DC, Working Current 500mA	12V DC, Working Current 500 mA
Environment Light	0-5000Lux	0-5000Lux
Working Distance	30-80cm	30-80cm
Working Temperature	0℃—40℃	0℃—40℃
Working Humidity	20% - 80%	20% - 80%
Size	200* 95* 115 mm	200* 95* 115 mm
Weight	505g	505g
Installation Method	Wall Mounting	Wall Mounting
Security Image Capacity	—	4GB SD Card, 70,000 images
Card Recognition	—	EM or Mifare card
Security Alarm	—	Tamper Alarm
Output for Access	—	Standard Wiegand 26/34 output. Built-in relay
Control System		
Certification	CE FCC Class A ROHS	

Hanwang Technology Co., Ltd

Address: Hanvon Tower, ZhongGuanCun, Software Park, Beijing, China, Postcode: 100193

Tel: +86-10-82786682 Fax: +86-10-82786518

Email: faceid_inquiry@hanwang.com.cn Http://www.hanvon.com

Specification subject to change without notice in advance. Copyright© Hanwang Technology Co., Ltd All rights reserved. The trademarks identified herein are the trademarks of or registered trademarks of Hanwang Technology Co., Ltd or other third party.