


MKV 600mm Servo Prestretch Rewinding Machine




Specification

- ❑ MKV base frame with 3 roller stretcher train geared to give a stretch of 335%
- ❑ Servo driven rewind to vary tension from 240% to 335%.
- ❑ Variable speed drive up to 400 metres per minute.
- ❑ Maximum web width 600mm.
- ❑ Single position rewind arms equipped with 38, 50 or 76mm collets.
- ❑ Manually adjusted pneumatic core pressure.
- ❑ Programmable electronic counter unit.
- ❑ Stretch ratio programmed on the front panel to control the servo rewind drive.
- ❑ Film break sensor.
- ❑ Maximum rewind roll diameter 280mm subject to film type.
- ❑ Maximum parent roll diameter 500mm.
- ❑ 3 - phase 380 volt supply. / Air requirements - 4 cfm max. at 80 psi.
- ❑ Guarding to suit current C.E. requirements

Machine Features

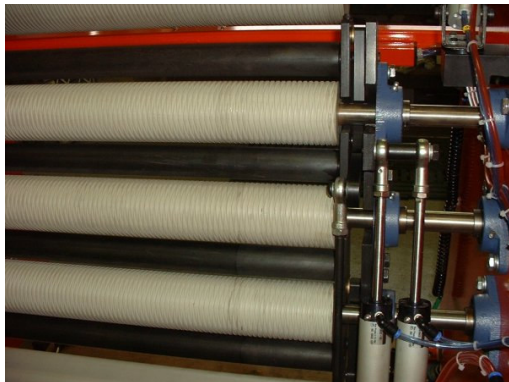


Geared pre stretch roller train.

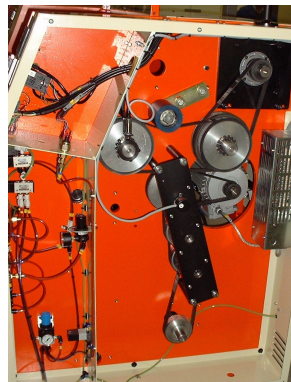

AC & servo drive chain.



Ratio set on front panel.

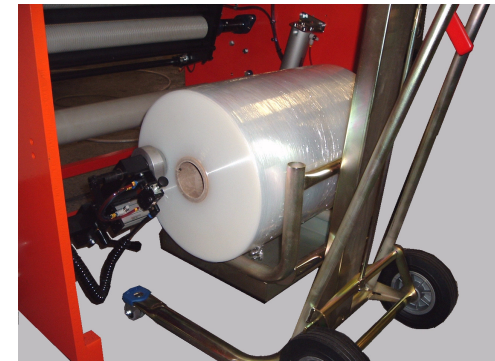

Optional roll trolley.



Converting Equipment Ltd

CG Automatic Converting Equipment Ltd

8 Highmeres Rd
Leicester LE4 9LZ
England

Ph +44 116 2760206 Fax +44 116 2742995

sales@cga-converting.com / www.cga-converting.com

Designing, Manufacturing & Supplying

Slitting, Rewinding, Coreless rewinding, Prestretch, Perforators & Special Purpose Machines.