

Semi-Automatic Coreless Prestretch Rewinding Machine

Specification


- ❑ Maximum parent roll diameter 500mm
- ❑ Maximum web width 600mm.
- ❑ Master roll core 76mm diameter.
- ❑ 4 roller stretcher train geared to give a stretch of 335%
- ❑ Servo driven rewind to vary collection tension from 240% to 335%.
- ❑ Adjustable external electronic rewind
- ❑ Variable speed drive up to 450 meters per minute.
- ❑ Single position coreless rewind station for either 50, 60 or 76mm ID rolls. (with change parts)
- ❑ Programmable electronic roll length counter.
- ❑ Maximum rewind roll diameter 250mm.
- ❑ Slitting blades for multiple finished roll winding (with change parts)
- ❑ Rolls can be produced with or without oscillation and edge guiding
- ❑ Film break sensor.
- ❑ 3 - phase 400 volt supply. / Air requirements - 4 cfm max. at 80 psi.
- ❑ Guarding to suit current C.E. requirements



Machine Features



Geared pre stretch roller train.

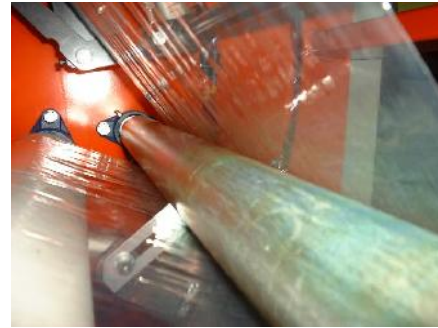

Slitting capability.



Simple controls on front panel.



Coreless Prestretch Rolls.



CG Automatic Converting Equipment Ltd

8 Highmeres Rd
Leicester LE4 9LZ
England

Ph +44 116 2760206 Fax +44 116 2742995

sales@cga-converting.com / www.cga-converting.com

Designing, Manufacturing & Supplying

Slitting, Rewinding, Coreless rewinding, Prestretch, Perforators & Special Purpose Machines.