



# FOLDING SHUTTER DOORS

**CARRINGTON DOORS**

HORTON STREET, HIGHER HILLGATE, STOCKPORT, SK1 3LR

Tel : 0161 477 3391 – Fax : 0161 477 3392

Email : [sales@carringtondoors.co.uk](mailto:sales@carringtondoors.co.uk) – web : [www.carringtondoors.co.uk](http://www.carringtondoors.co.uk)



Horton Street Higher Hillgate  
Stockport SK1 3LR

Tel : 0161 477 3391 – Fax : 0161 477 3392

Email : [sales@carringtondoors.co.uk](mailto:sales@carringtondoors.co.uk)

Web : [www.carringtondoors.co.uk](http://www.carringtondoors.co.uk)

**Carrington Folding Shutter Doors**

Are available as single units or pairs of doors.

Complete with a galvanised finish as standard, they are also available with a plastisol or powder coated finish.

**KEY FEATURES.**


Heavy gauge cold rolled top track.  
Galvanised cold rolled steel pickets.  
Ball bearing rollers.  
230 mm wide cold rolled galvanised leaves with ribbed appearance.

Cold rolled galvanised hinge strips.  
Unique heavy gauge cold rolled lattice.  
Heavy gauge cold rolled bottom track.  
Heavy gauge galvanised leading edges.  
Doors fitted with bow handles and heavy duty hasp and staples as standard.

Doors suitable for large openings up to 60 metres wide x 12 metres high.

Leaf gauge varies to suit size of door.

Doors can be manually or electrically operated by means of a 415v three phase geared electric motor with open/close/stop controlled from a push button starter panel, and a manual disconnection device to enable the door to be operated manually in the event of a power failure or emergency. Each motor unit has integral limits that stop the door at each end of its travel.

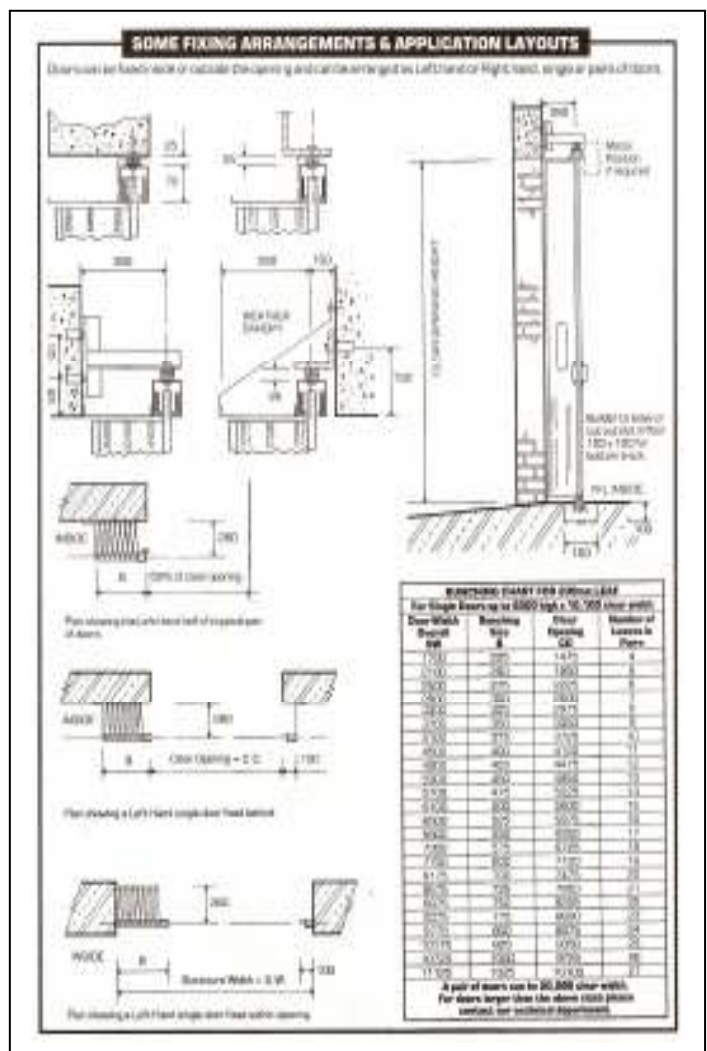

*Our policy is one of continuous product development and we therefore reserve the right to vary the product specification in this sales brochure*