Technical Data Sheet

Customer:	Part designation:	Customer part no.:
ANGLIA GB)	**SP-E 30/7**	**SKOP244-14-48**

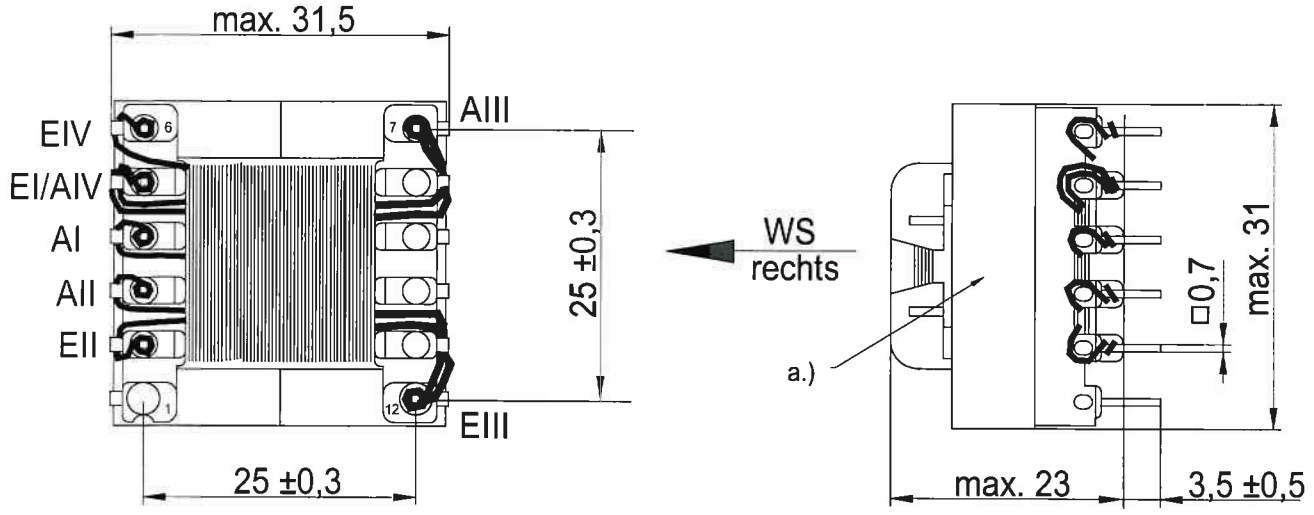

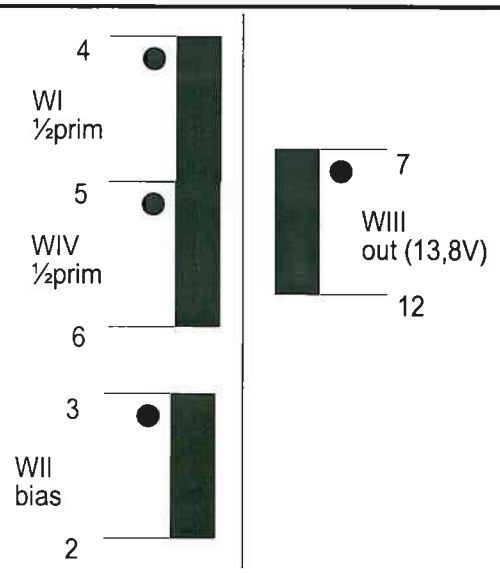

Core / material / air gap / AL	**E30/7 / K2006 or equiv. / 0,6**	
Nominal inductance	**LI+LIV = 930 µH ± 10%**	
maximum transmissible power	**48W**	
Working frequency	**132kHz**	
Transformation ratio	**42:8:9:42**	
dielctric strength (50Hz/2s)	**3,75 kV (WI/WII/WIV - WIII)**	
Nominal Current		
Design in comp. with standard	**.**	
Working / storage temperature	**-25°C- +115°C**	**-25°C- +85°C**
Miscellaneous	**F (DIN 40040)**	

Remarks : **a.) marking**

split primary

Measuring device of L: **W&K 3260A** | Measuring conditions of L: **50mV/10KHz/25°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:	Date:	Design regulation no:	Index:
Markus Häpe	**27.07.2007**	**066.932**	**00**

PLEASE GIVE US YOUR WRITTEN RELEASE Date: _____ Signature: _____