
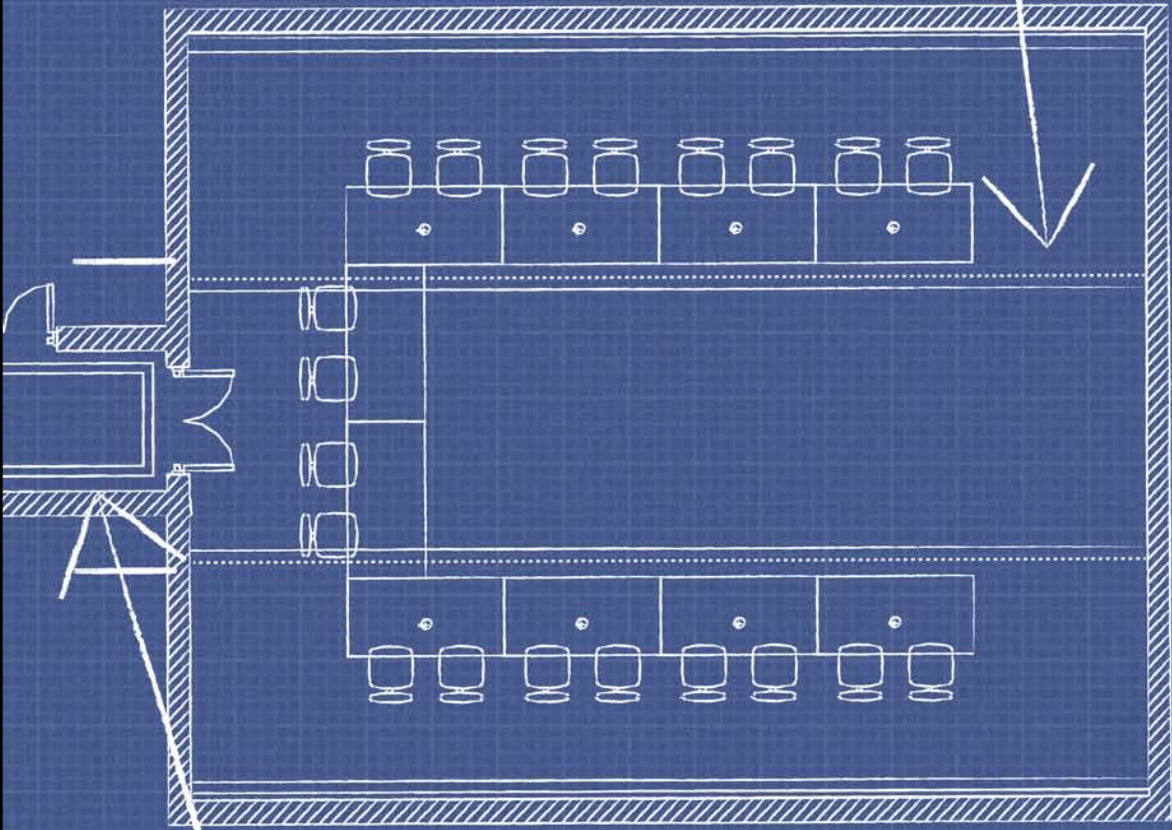


Send to INOX for a quote

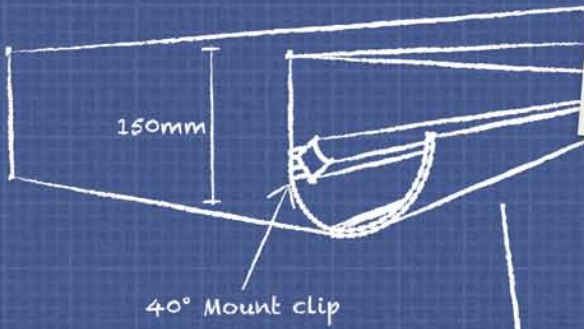

I

N

O

X

60mm shallow floating raft



## LED BAR

1400 LM/M


SEAMLESS // 240V // PLUG'N'PLAY // 580mm, 880mm &amp; 1180mm LENGTHS




- Seamless illumination
- Built-in power supply (plug'n'play)
- 70 lumens per watt
- 2700k, 3000k, 4000k, 6000k
- Choice of diffusers: rounded opal, flat opal or flat clear
- 15° / 40° angle bracket option
- Dimmable by leading/trailing edge, analogue, DALI or DMX
- Lengths of modules to match fluorescent lamps
- Range of connectors




## Mounting Clip

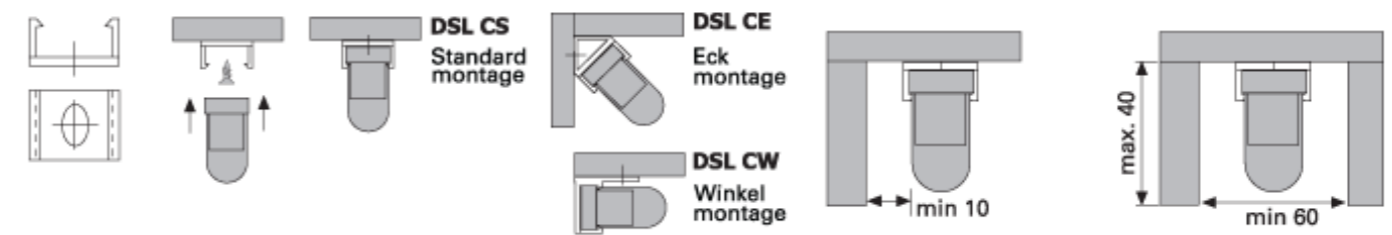

## Round diffuser

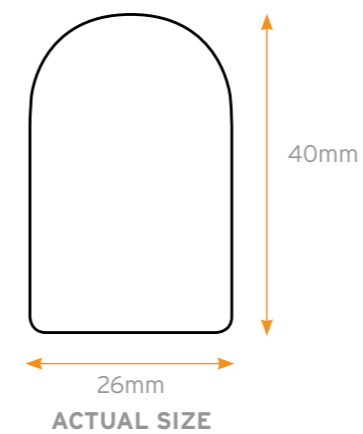

## Flat diffuser

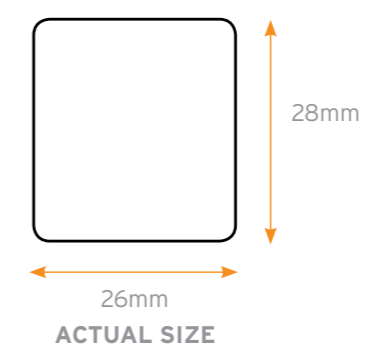


# SLIMLINK // DIMSLIMLINK

2100-3800 LM/M

SEAMLESS FLUORESCENT // T5 HIGH OUTPUT LINEAR FIXTURES // NO DARK ZONES





- Seamless illumination
- Built-in power supply (plug'n'play)
- High efficiency & high output options available
- Choice of eight lengths
- 2200k, 2700k, 3000k, 4000k, 6500k, 8000k, red, blue & green
- Dimmable by leading/trailing edge, analogue, DALI or DMX
- Range of connectors

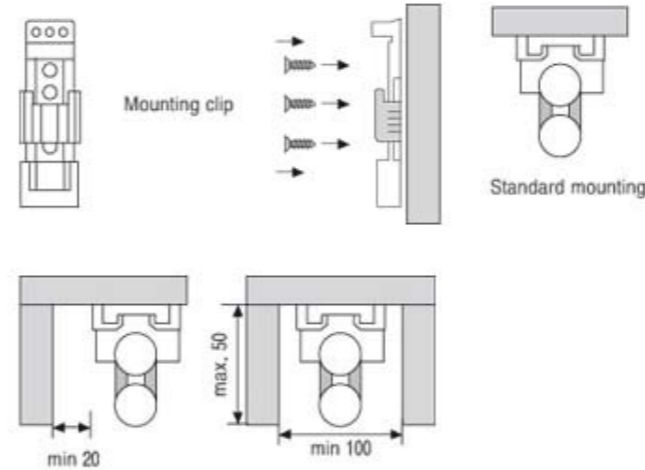

SlimLink/DimSlimLink



Standard T5 batten

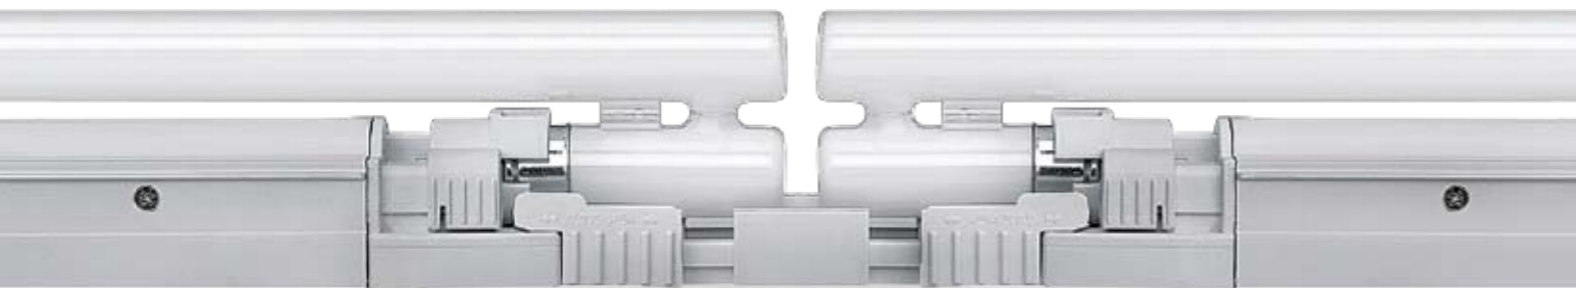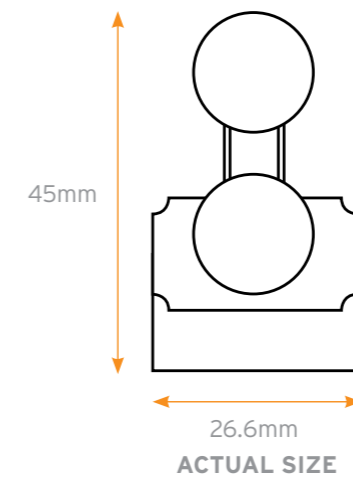

See technical data on pages 20-22 for full details...

SEAMLESS // DIMMABLE // REPLACEABLE LAMP // 240V // 580mm, 880mm &amp; 1180mm LENGTHS



- Seamless illumination
- Built-in power supply (plug'n'play)
- Replaceable LED lamp
- 70 lumens/watt
- 2700k, 3000k, 4000k, 6000k
- Choice of diffusers: rounded opal, flat opal or flat clear
- Dimmable by leading/trailing edge, analogue, DALI or DMX
- Lengths of modules to match fluorescent lamps
- Range of connectors



Milky flat diffuser



Milky round diffuser



Clear flat diffuser



Direct connector




Feed cable

Connecting cable: 150mm (6in),  
300mm (1ft), 600mm (2ft),  
1200mm (4ft), 1800mm (6ft)



- Seamless illumination
- 24v DC 'plug'n'play'
- 75 lumens/watt
- 2700k, 3000k, 4000k, 6000k
- Range of connectors
- Dimming on 1-10v & DALI
- 6 lengths available
- Round or square diffusers
- 15° / 40° angle bracket option
- Double density option, provides more consistent linear illumination when close to surfaces
- RA 94 option
- Various fixing methods

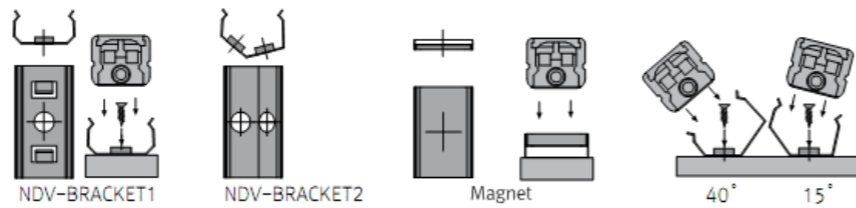

See technical data on pages 20-22 for full details...




- Seamless illumination
- 24v DC 'plug'n'play'
- 75 lumens/watt
- 2700k, 3000k, 4000k, 6000k
- Range of connectors
- Dimming on 1-10v & DALI
- Two level switching
- 5 lengths available
- Round or square diffusers
- 15° / 40° angle bracket option
- Various fixing methods



See technical data on pages 20-22 for full details...



- Seamless illumination
- Built-in power supply (plug'n'play)
- 75 lumens/watt
- Colour temperature variable between 2700K and 6000K
- Range of connectors
- Dimming on 1-10v & DALI
- 5 lengths available
- Round or square diffuser options

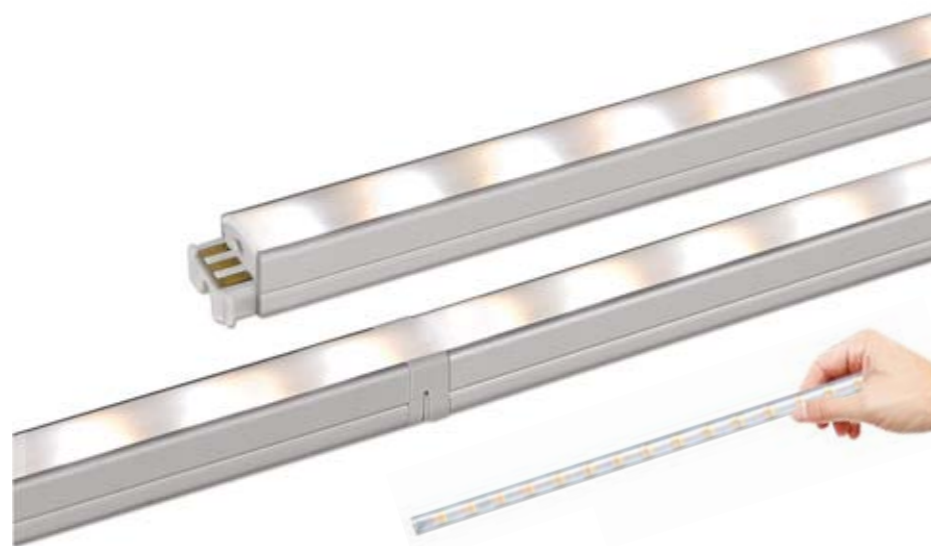

6000k

2700k

See technical data on pages 20-22 for full details...



- Compact downlight
- 24v DC 'Plug'n'play'
- 75 lumens/watt
- 4.3 watts
- 2700k, 3000k, 4000k, 6000k
- Available in white, black, silver or gold
- Dimming on 1-10v & DALI
- Interference or spring fixing
- Various optics



See technical data on pages 20-22 for full details...



- Rectilinear or curvilinear styles
- Single or multi-lamp
- Metal or ceramic housing
- High output LED, halogen, CFL or discharge lamp options
- See 'www.inox.co.uk' for data sheets and the full range

ARTUS ROUND



ARTUS SQUARE



CERAM



ARTIX



JAZZ



FLANGED







- Range of widths
- LED or fluorescent
- Trimless or flanged
- Satin diffuser, opal diffuser or louvre
- See 'www.inox.co.uk' for data sheets and the full range

- Also available in suspended
- Range of widths
- LED or fluorescent
- Satin diffuser, opal diffuser or louvre
- See 'www.inox.co.uk' for data sheets and the full range


NOTUS 3 TRIMLESS




NOTUS 3 CROSS



NOTUS 10




NOTUS 1 DS



NOTUS 5 CROSS



NOTUS 7









- Range of styles
- LED or fluorescent
- Direct, indirect and combined
- Satin diffuser, opal diffuser or louvre
- See 'www.inox.co.uk' for data sheets and the full range


NOTUS 9



NOTUS 11

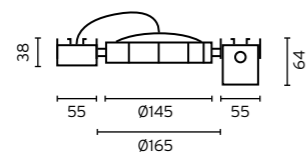


NOTUS 17 UP DOWN

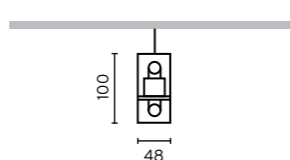


- LED systems
- Surface or recessed
- See 'www.inox.co.uk' for data sheets and the full range



NOVUS IN OPAL

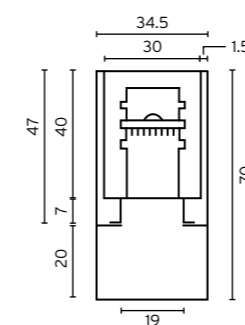

NOVUS OUT OPAL

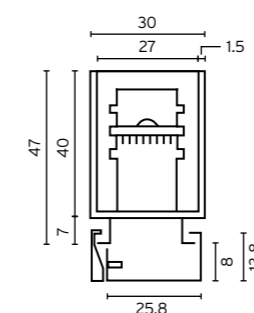

NOVUS IN HIGH POWER

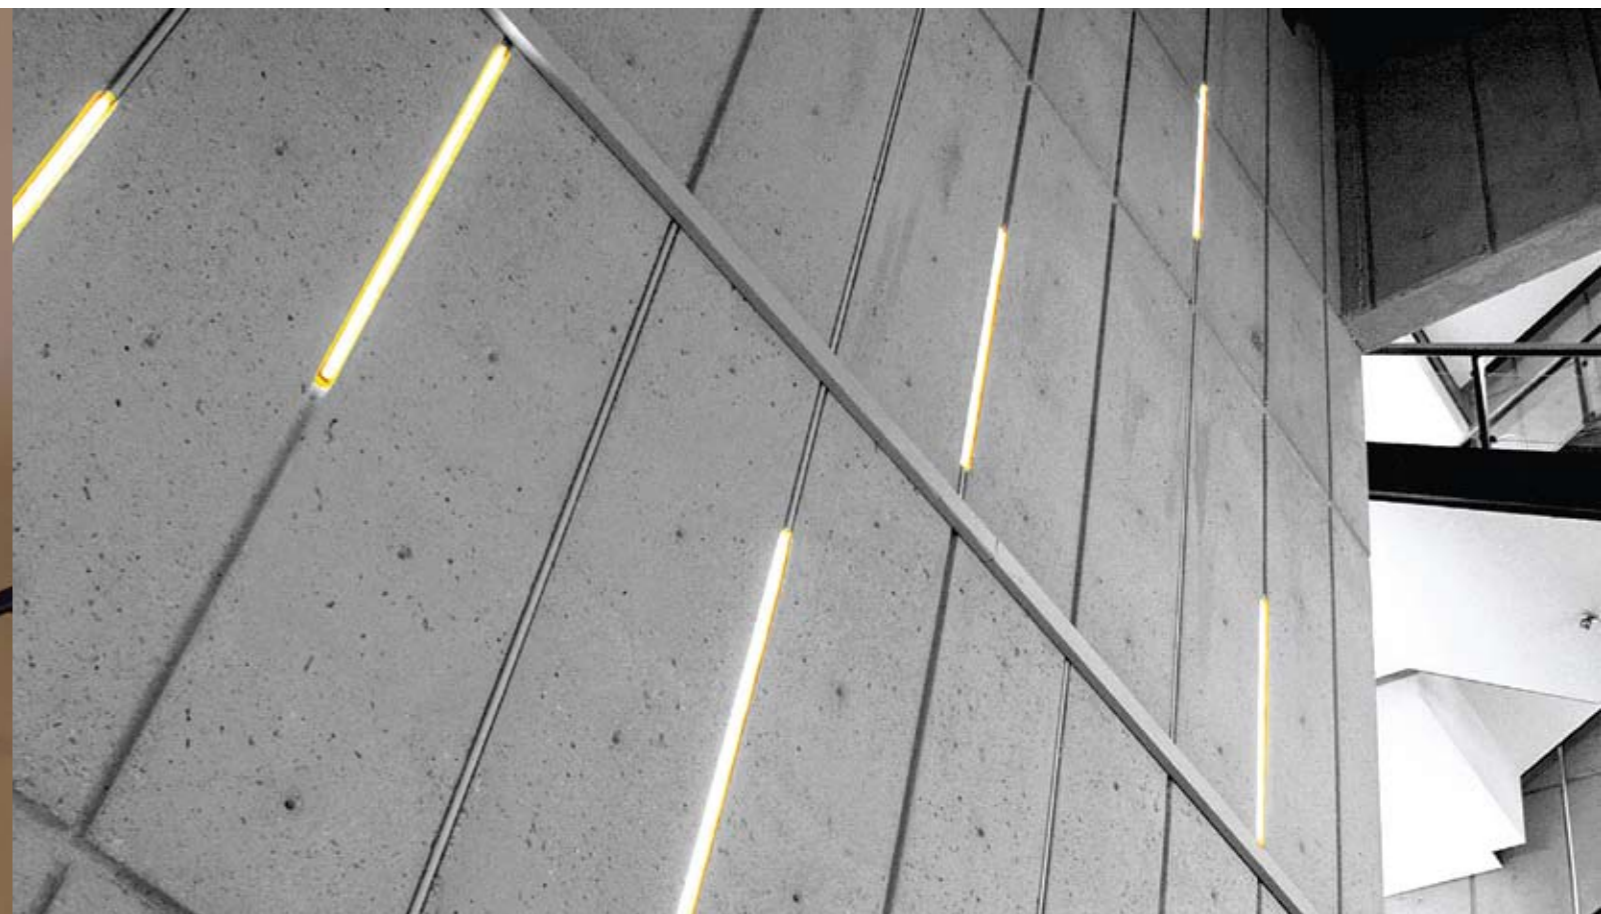


# TUNELIGHT FIXED/ADJUSTABLE

1000 LM/M

SLIM &amp; SIMPLE - PERFECT FOR CABINET DISPLAYS // 526mm, 690mm, 836mm, 1145mm &amp; 1455mm LENGTHS



- Versatile display luminaire
- Seamless illumination
- Built-in power supply (plug'n'play)
- 75 lumens/watt
- 2700k, 3000k, 4000k, 6000k
- Fixed version is dimmable by leading/trailing edge, analogue, DALI or DMX
- Range of connectors
- Fixed or adjustable optic
- Adjustable shelf fixing bracket

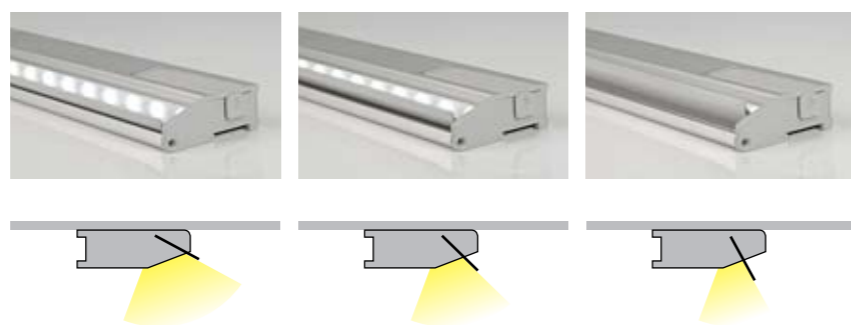


See technical data on pages 20-22 for full details...

# CONDUCTIVE PLASTERBOARD



- Unique 'live wall' system
- Ultimate flexibility
- Range of LED, halogen and spot lights
- Colour change
- Panels can be painted, papered or covered in fabric
- Panel sizes up to 2400x1200mm
- Phone to book demo - 01702 468165

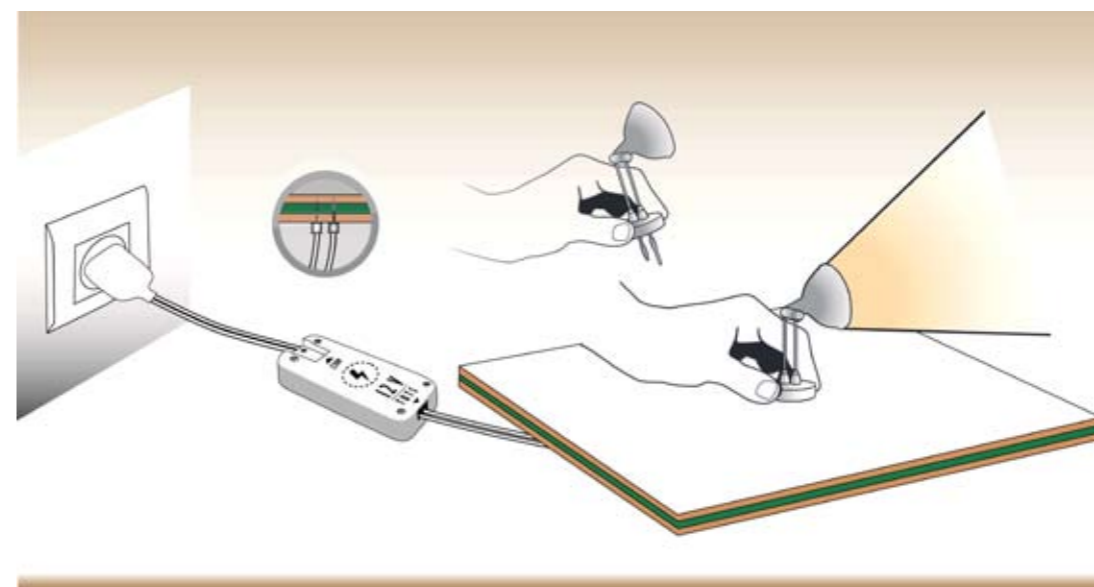

Product	Technology	Cat no	Operating power	Lamp W	System W	System W/M	Rated life**	Lamp lm***	Lm/Cw	Lm/M*****	Lamp colour	RA	Dimming systems	IP	Insulation class	Dimensions****				Max connection (non-dimming)	Max connection (dimming)
																Length	Width	Depth with standard diffuser	Depth with optional diffuser		
Slimlink	T5 seamless fluorescent	SLL8AB23NN	220-240V AC	8	11.5	33	20,000	430	37.4	1,300	2200, 2700, 3000, 4000, 6500, 8000, red, blue, green	>82	-	20	2	352	34	44.3	49.5	600W	-
		SLL14AB23NN		14	16	27		1200	75.0	2,100						582					
		SLL21AB23NN		21	23	26		1900	82.6	2,200						882					
		SLL28AB23NN		28	31	26		2600	83.9	2,200						1182					
		SLL35AB23NN		35	37	26		3300	89.2	2,400						1402					
		SLL24AB23NN		24	28	48		1750	62.5	3,100						582					
		SLL39AB23NN		39	40	45		3100	77.5	3,600						882					
		SLL54AB23NN		54	56	47		4450	79.5	3,800						1182					
Dimlink	T5 seamless fluorescent	DSL14AB23NN	220-240V AC	14	17.5	30	20,000	1200	68.6	2,100	2200, 2700, 3000, 4000, 6500, 8000, red, blue, green	>82	Phase, 1-10V, DALI, DMX	20	2	582	34	44.3	49.5	600W	10 pcs or 600W
		DSL21AB23NN		21	25	28		1900	76.0	2,200						882					
		DSL28AB23NN		28	32.5	27		2600	80.0	2,200						1182					
		DSL35AB23NN		35	38.5	27		3300	85.7	2,400						1402					
		DSL24AB23NN		24	27	46		1750	64.8	3,100						582					
		DSL39AB23NN		39	43	49		3100	72.1	3,600						882					
		DSL54AB23NN		54	60	51		4450	74.2	3,800						1182					
LED Slimlink	LED	LSLL10AB23NN/T	220-240V AC	10	10	17	40,000	700		1,400	2700, 3000, 4000, 6000	>80	Phase, 1-10V, DALI, DMX	20	2	582.5	33	50.2	37.5	600W	20 pcs
		LSLL15AB23NN/T		15	15	17		1,050	80	1,400						882.5					
		LSLL20AB23NN/T		20	20	17		1,400	1,400	1182.5											
LED Bar	LED	LDB10A*B23RM/T	220-240V AC	10	10	17	40,000	700		1,400	2700, 3000, 4000, 6000	>80	Phase, 1-10V, DALI, DMX	20	2	582.5	26	40.6	28	600W	20 pcs
		LDB15A*B23RM/T		15	15	17		1,050	80	1,400						882.5					
		LDB20A*B23RM/T		20	20	17		1,400	1,400	1182.5											
LED Diva 2	LED	NDV1A*B24M	24V DC	1.2	1.2	13	40,000	90			2700, 3000, 4000, 6000	>80	1-10V	20	3	95	10.6	9	18.9	55W	55W (48W on FLD-V10 translator, 100W on FDC-L10 translator)
		NDV3A*B24M		2.4	2.4	13		180	188												
		NDV3A*B24M/S		2.4	2.4	13		180	188												
		NDV4A*B24M		3.5	3.5	13		262.5	280												
		NDV7A*B24M		7	7	13		525	560												
		NDV11A*B24M		10.5	10.5	13		787.5	840												
		NDV15A*B24M		14	14	13		1050	1118												
LED Diva 2 HO	LED	HVD3A*B24M	24V DC	2.9	2.9	21	40,000	217.5			2400, 2700, 3000, 4000, 6000	>80	1-10V	20	3	140	15	12.5	21	75W	75W (48W on FLD-V10 translator, 100W on FDC-L10 translator)
		HVD3A*B24M/S		2.9	2.9	21		217.5	140												
		HVD6A*B24M		5.8	5.8	21		435	280												
		HVD12A*B24M		11.6	11.6	21		870	560												
		HVD18A*B24M		17.4	17.4	21		1305	840												
		HVD24A*B24M		23.2	23.2	21		1740	1118												
LED Diva 2 Dual	LED	DDV3AWCB24M	24V DC	2.9	2.9	21	40,000	217.5			Adjustable, 2700K - 6000K	>80	1-10V	20	3	140	15	12.5	21	75W	75W (48W on FLD-V10 translator, 100W on FDC-L10 translator)
		DDV3AWCB24M/S		2.9	2.9	21		217.5	140												
		DDV6AWCB24M		5.8	5.8	21		435	280												
		DDV12AWCB24M		11.6	11.6	21		870	560												
		DDV18AWCB24M		17.4	17.4	21		1305	840												
		DDV24AWCB24M		23.2	23.2	21		1740	1118												
Tunelight Fixed	LED	TUN7A*B23/T	220-240V AC	7	7	13	40,000	525			2700, 3000, 4000, 6000	>80	Phase, 1-10V, DALI, DMX20	20	2	526	52	18	-	600W	30pcs
		TUN11A*B23/T		11	11	13		825	836												
		TUN15A*B23/T		15	15	13		1125	1145												
Tunelight Adjustable	LED	TUN7A*B10/T	220-240V AC	7	7	13	40,000	525			2700, 3000, 4000, 6000	>80	-	20	2	526	52	18	-	600W	-
		TUN9A*B10/T		9	9	13		675	690												
		TUN11A*B10/T		11	11	13		825	836												
		TUN15A*B10/T		15	15	13		1125	1145												
		TUN18A*B10/T		18	18	12		1350	1455												
LED Diva	LED	DV4A*B24C/T	24V DC	3.5	3.5	11	40,000	262.5			2700, 3000, 4000, 6000	>80	1-10V	20	3	310	17.7	20	-	55W	55W (48W on FLD-V10 translator)
		DV7A*B24C/T		7	7	11		525	610												
		DV11A*B24C/T		10.5	10.5	12		787.5	910												
Divas 2 Spot	LED	DVS4A*3B24**	24V DC	4.3	4.3	-	40,000	331	75	-	2700, 3000, 4000, 6000	>80	1-10V	20	3	D=76.2	H=16.1	Cut-out 68mm	-	7pcs	7pcs

\*Replace with one or two-digit lamp colour code (e.g. 27 for 2700K, 4 for 4000K).

\*\*Replace with one digit body colour code: S Silver, W White, B Black, G Gold.

\*\*\*Rated life for LED products is L70 life; for fluorescent lamps average life (50% survival).

\*\*\*\*Lumen output is for fluorescent lamps <6500K and for LED products 4000K. Consult datasheets for other colours.



\*\*\*\*\*Only key dimensions are shown - consult datasheets for full dimensional information.

\*\*\*\*\*To nearest 100







Direct/Indirect profile  
with spots in corners

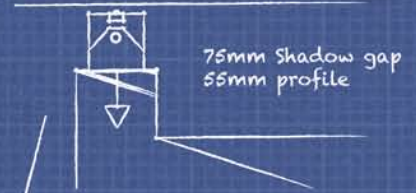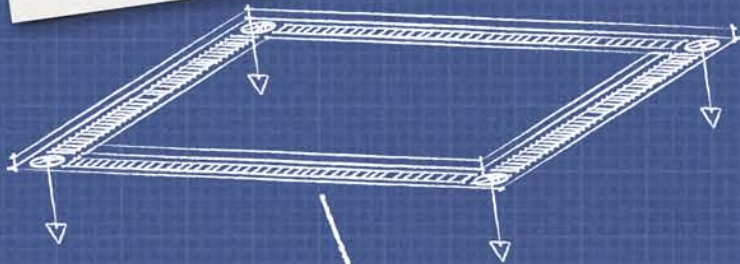

75mm Shadow gap  
55mm profile

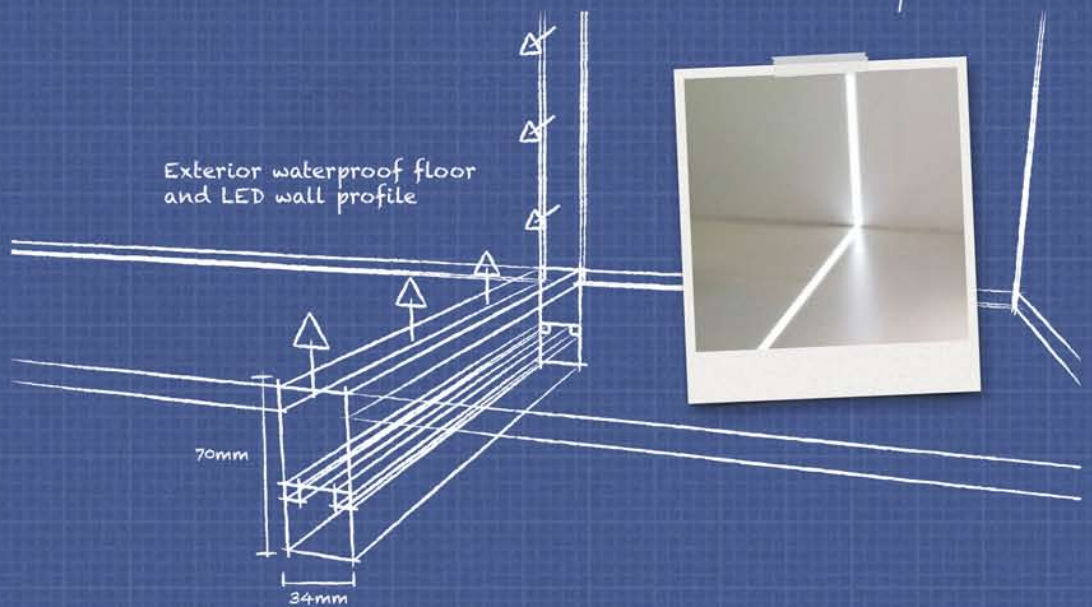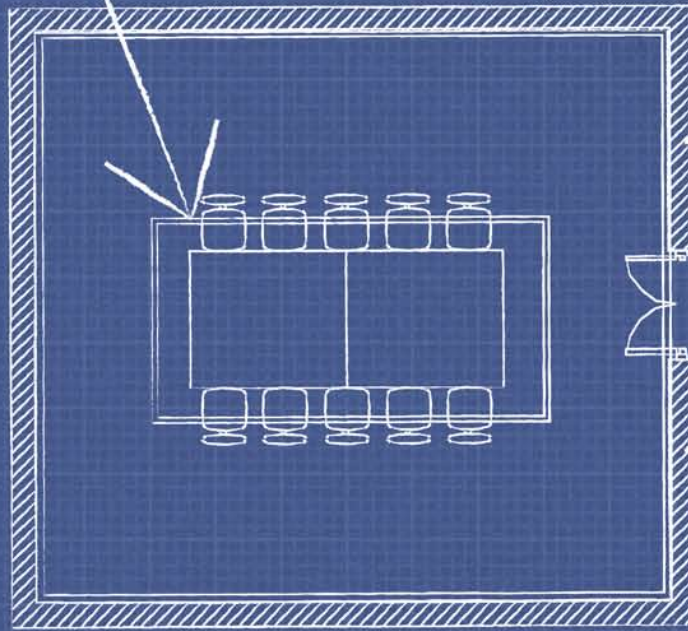

Exterior waterproof floor  
and LED wall profile

