

Verderair VA 15



VA15AC

VERDERAIR

Technical data		
Weight [kg]	Acetal	3,5
	Polypropylene (PP)	2,9
	Kynar	3,9
Suction lift [mwc]	Dry	4,5
	Wet	7,6
Temperature [°C]	Acetal	5 - 65*
	Polypropylene	5 - 65
	Kynar	5 - 65**
Max. particle size [mm]		2,5
Non wetted material, centre section	Polypropylene	

* 82°C with Teflon diaphragms ** 107°C with Teflon diaphragms

CODES VA 15 NO.2 NO.3 NO.4 NO.5

no.2 material of casing

- AC = Acetal
- CPP = Conductive (PP)
- PP = Polypropylene
- KY = Kynar

no.3 material of seat



- AC = Acetal
- PP = Polypropylene
- KY = Kynar
- SS = Stainless Steel

no.4 material of valve

- TF = Teflon
- SP = Santoprene
- SS = Stainless Steel
- HY = Hytrel
- BN = Buna N
- VT = Viton

no.5 material of diaphragm

- TF = Teflon
- SP = Santoprene
- BN = Buna N
- VT = Viton
- HY = Hytrel

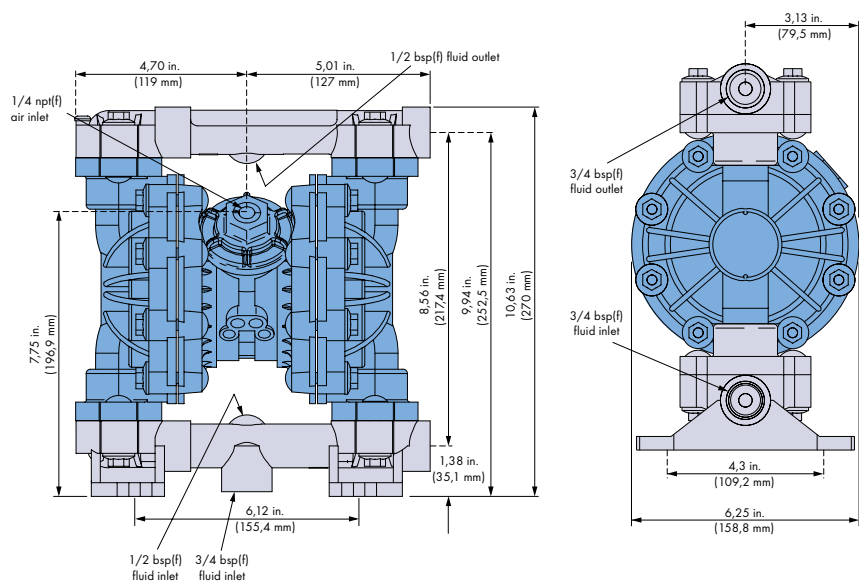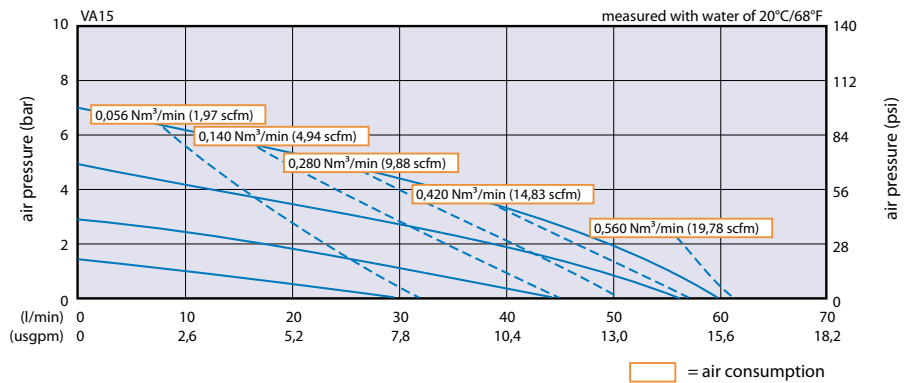

VA15nommet_Techno_Rev03_2012_(eu)

Find your local supplier at www.verderair.com

