

Verderair VA 20



VA20AL

VERDERAIR

Technical data		
Weight [kg]	Aluminum	3,9
	Stainless Steel	8,2
Suction lift [mwc]	Dry	4,5
	Wet	7,6
Temperature [°C]	Aluminium	5 - 65*
	Stainless Steel	5 - 65*
Max. particle size [mm]		2,5
Non wetted material, centre section	Polypropylene	

* 107°C with Teflon diaphragms

CODES VA 20 NO.2

NO.3 NO.4 NO.5

no.2 material of casing

- AL = Aluminium
- SS = Stainless Steel

no.3 material of seat



- AC = Acetal
- PP = Polypropylene
- KY = Kynar
- SS = Stainless Steel

no.4 material of valve

- TF = Teflon
- HY = Hytrel
- SP = Santoprene
- SS = Stainless Steel
- BN = Buna N
- VT = Viton

no.5 material of diaphragm

- TF = Teflon
- HY = Hytrel
- SP = Santoprene
- BN = Buna N
- VT = Viton

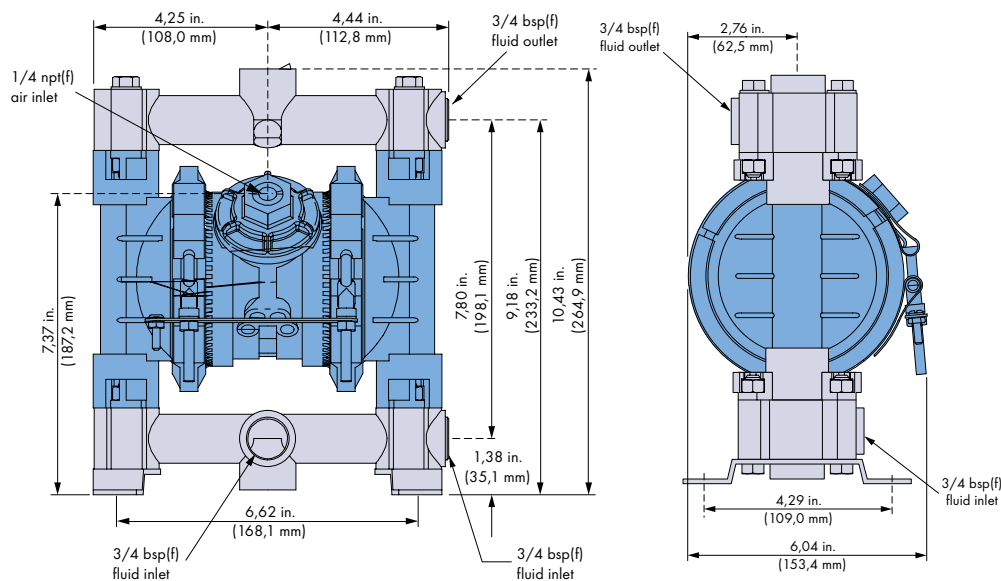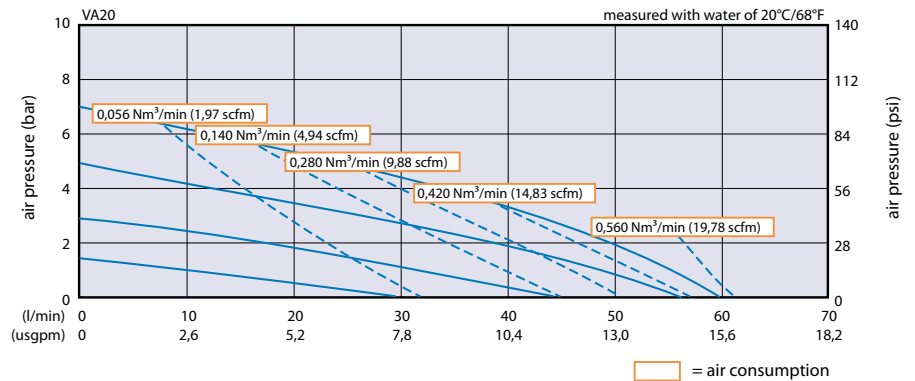

VA20met_Techno_Rev03_2012_(eu)

Find your local supplier at www.verderair.com

