

Verderair

VA 50 non-metallic



VA50PP


VERDERAIR

Technical data		
Weight [kg]	Polypropylene with Aluminium centre section	22
	Polypropylene with Stainless Steel centre section	32
	Kynar with Aluminium centre section	31
	Kynar with Stainless Steel centre section	41
Suction lift [mwc]	Dry	2,5
	Wet	5,5
Temperature [°C]	Polypropylene (PP)	5-65
	Kynar	5-65*
Max. particle size [mm]		6,3
Non wetted material, centre section	Epoxy coated Aluminium/Stainless Steel	

* 93°C with Teflon diaphragms

CODES VA 50 NO.2 NO.3 NO.4 NO.5

no.2 material of casing

- PP = Polypropylene
-  CPP = Conductive PP
- KY = Kynar

no.3 material of seat



- PP = Polypropylene
- HY = Hytrel
- SS = Stainless Steel
- GE = Geolast
- HS = Hardened Steel
- KY = Kynar
- SP = Santoprene

no.4 material of valve

- TF = Teflon
- HY = Hytrel
- HS = Hardened Steel
- AC = Acetal
- SP = Santoprene
- VT = Viton
- GE = Geolast

no.5 material of diaphragm

- TF = Teflon
- HY = Hytrel
- SP = Santoprene
- VT = Viton
- GE = Geolast

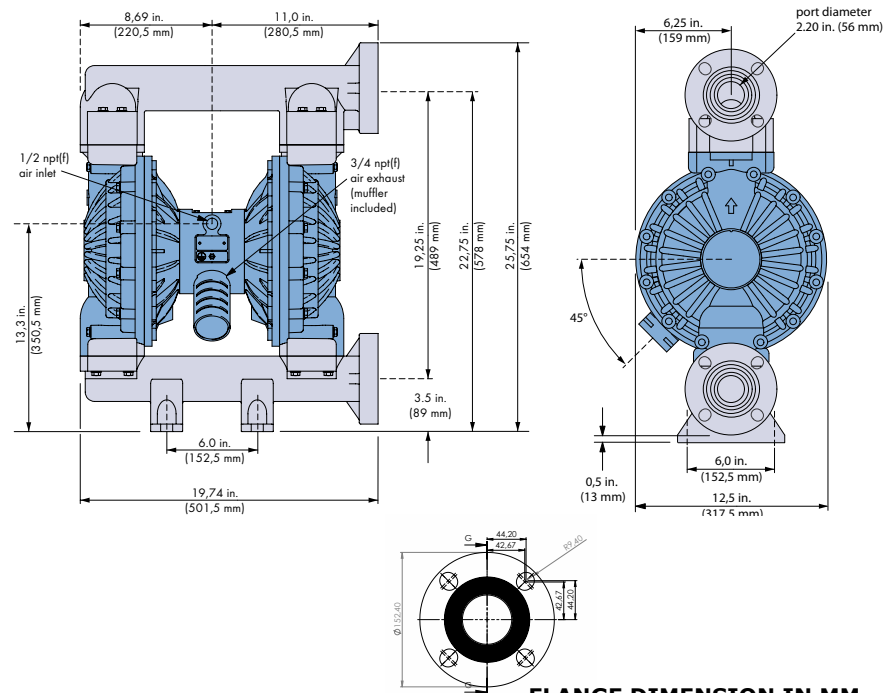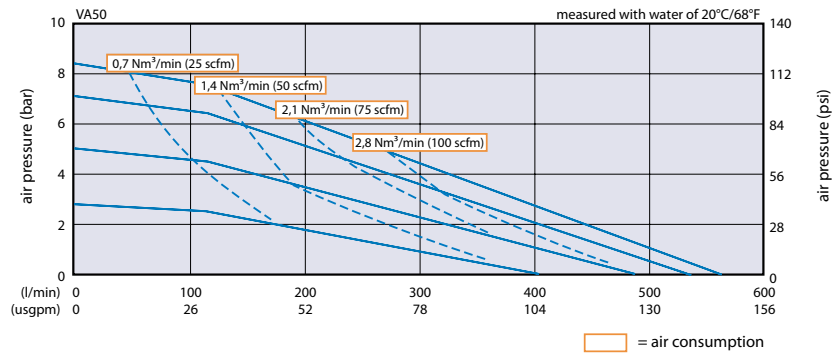

FLANGE DIMENSION IN MM

VA50nonmet_Techno_Rev03-2012_(eu)



Find your local supplier at www.verderair.com

