

Verderair

VA-P08





VA-P08

VERDERAIR

Technical data VA-P08			
Nominal port size	Code No.6	TN	1/4" NPT[f]
Air inlet			R 1/8"
Weight [kg]		VA-P08EE	1,1
		VA-P08GG	1,1
		VA-P08TT	2,5
		VA-P08UU	2,3
Max. operation pressure [Bar]			7
Max. operating temperature [°C]		VA-P08EE or VA-P08GG	70
		VA-P08TT or VA-P08UU	100
Max. size pumpable solids [mm]	Code No.3	EP or TF or SS	2,2
		CV	/
Max. Suction lift dry [mWc]	Code No.3	EP or TF or SS	0,5
		CV	1
Max. Suction lift wet [mWc]	Code No.3	EP or TF or SS	9
		CV	9

CODE VA-P08 No.1 No.2 No.3 No.4 No.5 No.6

No.1 Housing & Center Section/ No.2 Valve seat

- EE EE = Polyethylene (PE UHMW)
-  GG GG = Conductive Polyethylene (PE UHMW)
- TT TT = PTFE
-  UU UU = Conductive PTFE

No.3 Valve balls

- EP = EPDM
- TF = PTFE
- SS = SS 316
- CV = Cylinder Valve

No.4 Diaphragms

- EO = EPDM Overmolded
- TO = PTFE Overmolded

No.5 Fluid connections

- TN = NPT Threated female

No.6 Options

- OO = Standard, no option
- RE = Remote
- PD = Ready for Pulsation Dampener
- VS = Vertical Suction

 II 2GD c II B Tx


EXAMPLE PUMP TYPE

EXAMPLE : VA-P08EE EE TF TO TN OO



Verderair VA-P08

VA-P08

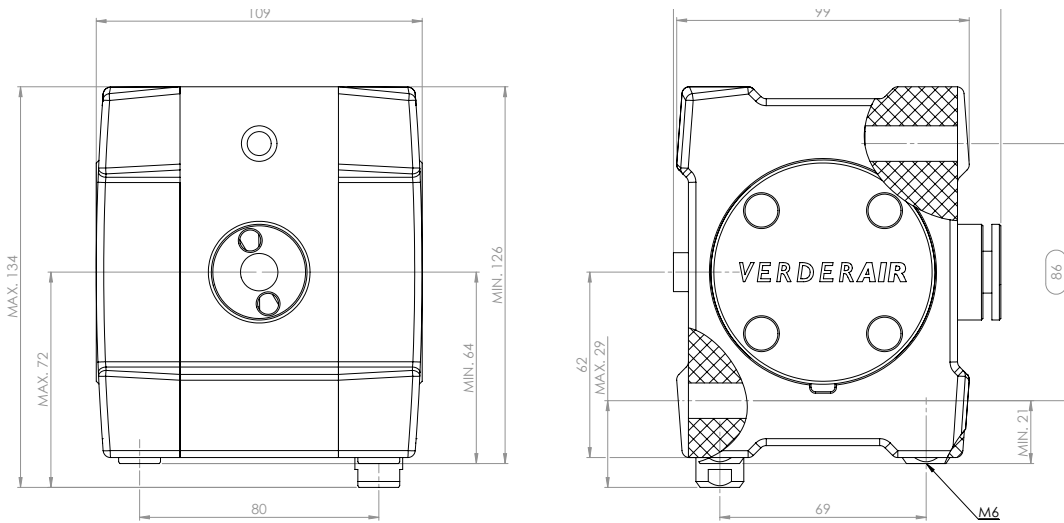

Dimensions in millimeters

Measured with water of 20°C

