

Verderair VA-P10



VA-P10

VERDERAIR

Technical data VA-P10		
Nominal connection [NPT]		3/8"
Air connection		R 1/8"
Weight [kg]	PE	3,6
	PTFE	5,1
Max. particle size [mm]	Ball valves	3
	Cylindric valves	-
Suction lift [dry, mwc]	Ball valves	1
	Cylindric valves	2
Suction lift [filled, mwc]		9
Max. operating pressure (bar)		7
Temperature [°C] [max]	PE	70
	PTFE	100

CODE VA-P NO.1 NO.2 NO.3 NO.4 NO.5 NO.6 NO.7

no.1 Size

08 = 1/4"
10 = 3/8"
15 = 1/2"
25 = 1"
40 = 1 1/2"
50 = 2"

no.2 Housing & Center Section

EE = Polyethylene (PE)
 GG = PE Conductive
 TT = PTFE
 UU = PTFE Conductive

no.3 Valve seat

EE = PE
 GG = PE Conductive
 TT = PTFE
 UU = PTFE Conductive

no.4 Valve balls

EP = EPDM
 TF = PTFE
 SS = SS316
 CV = Cylinder Valve

no.5 Diaphragms

TO = PTFE Overmolded
 EO = EPDM Overmolded

no.6 Connections

TN = Threaded NPT
 FD = Flanged DIN
 FA = Flanged Aisi
 FJ = Flanged JIS

no.7 Options

OO = Standard, no option
 SS = Stroke Sensor
 RE = Remote
 DM = Draining Manual
 DP = Draining Pneumatical
 BS = Barrier system with Sensors only
 LS = Leak detection, Sensor only
 PD = Ready for Pulsation Dampener
 AP = ANSI Prepared

Note: Not all combinations are available

II 2GD c II B Tx


EXAMPLE PUMP TYPE

EXAMPLE : VA-P10EE EE TF TO TN OO



Verderair VA-P10

VA-P10

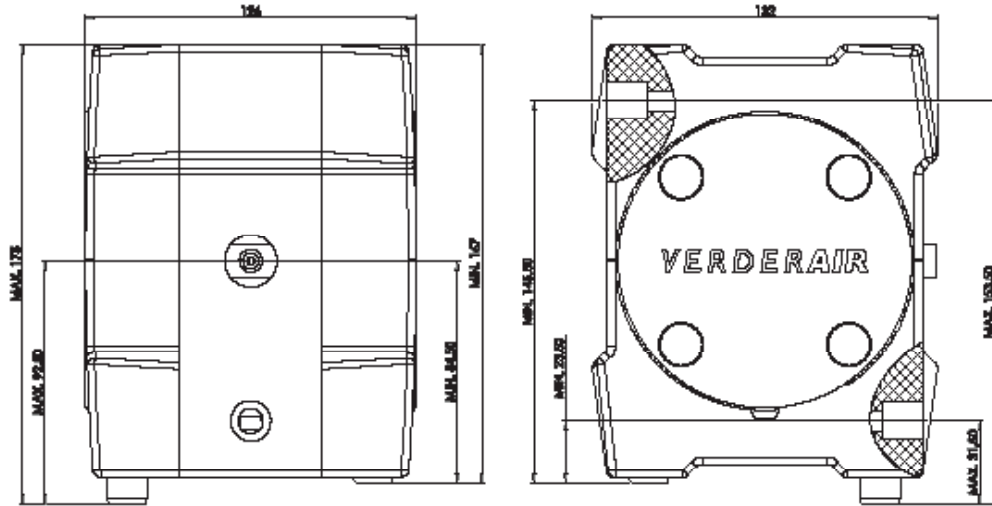

Dimensions in mm

Measured with water of 20 °C

