



Cable Pressurisation Equipment

The new CDU 2B has been designed to replace the two largest Compressor Desiccator Units within the BT ratebook. Offering the airflow of the larger CDU 2A, but with a simplified design and assembly, the 2B combines the performance that a large cable network demands with the ease of maintenance that technicians will endorse.

Sound damped to a level of below 60db at 1 metre, and housed within a compact enclosure, the 2B offers unobtrusive efficiency within even the busiest telephone exchange. Integral castors, and guick connect pneumatic couplings make installation simple. Designed to be directly interchangeable with either a CDU1A or 2A, the new 2B requires an external air receiver, and pressure-regulating panel.

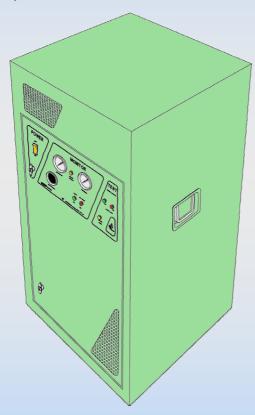



Routine maintenance will prove to be simple and convenient for anyone with experience of previous 1A or 2A. Many of the recommended servicing spares even remain the same. For those that have no recent experience, Drallim will be happy to provide training on BT equipment, either at a UK BT site, or at our premises in East Sussex.

All units are built to our usual standard of workmanship, with pneumatic connections made using our own patented range of fittings, and wiring looms made to the standard that has gained Drallim an unsurpassed reputation for quality the world over.

Dry Air Delivery	Output Pressure	Dry Air Dewpoint	No. of Outlets	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)	Operating Voltage
170 ft³/hr	N/A	-35ºC	1	1190	610	600	123	230v AC

Millwood House, Drury Lane, Ponswood Industrial Estate, St. Leonards on Sea, East Sussex, TN38 9BA **United Kingdom**

1 44 (0) 1424 202140 email@drallim.com

www.drallim.com



An ISO 9001:2000 Approved Company Registered Office: Registered in England No. 606278

12440 (BT ITEM CODE 007958) COMPRESSOR **DESICCATOR UNIT 2B**

