

RubbaMat™


Temporary Access & Flooring Mat



- » Fast and easy to install
- » Unique chevron traction® surface
- » Made from 100% SBR rubber
- » Minimises risk of damage to delicate or decorative surfaces such as natural stone
- » Supports health and safety objectives
- » Protects sensitive surfaces such as internal flooring in lobbies and atriums
- » Safety mat providing public / pedestrian safety over kerbs and pathways during construction and repair
- » Safer walkways for use within building sites

RubbaMat™

Temporary Access & Flooring Mat

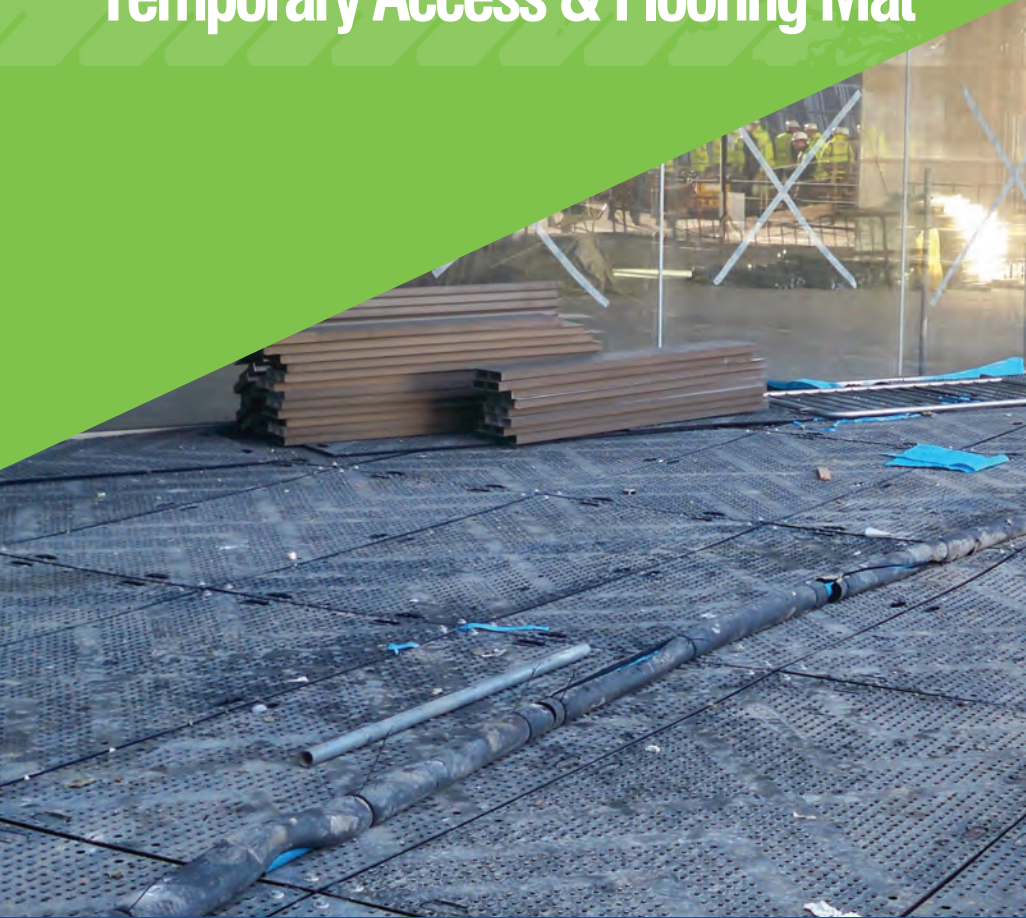

Temporary Access & Ground Protection Mats

RubbaMat™ is a lightweight manhandleable mat ideal for temporary access and ground or surface protection in areas where a softer surface is required or in areas where underlying conditions are better suited to more flexible matting.

Incredibly Tough & Flexible

RubbaMat is made from tough, heavy duty, 100% SBR rubber.

RubbaMat significantly reduces damage to delicate surfaces, such as decorative stone paving or kerb stones and RubbaMat's design is particularly suited for use in equestrian or livestock environments where adequate drainage and a softer mat with rugged grip is required.

Fast & Efficient Installation

Weighing just 43.6kg RubbaMat has strategically positioned hand hold insets and connection points which make RubbaMat easy to off load and deploy by a two man team.

Chevron Traction® Surface

RubbaMat's chevron traction® surface comprises of a broken pattern of rugged nubs which substantially improves grip even in the most challenging weather. The depth of the nub design also provides superior grip for horses or livestock, reducing the risk of 'cast'.

Surface Protection

RubbaMat delivers dual functionality and an effective solution for temporary access and protection for sensitive surfaces. RubbaMat not only creates both a safer work surface, but the softer rubber delivers a superior level of protection to delicate hard surfaces such as natural stone and internal flooring.


Product Specifications

RubbaMat™ Temporary Access & Flooring Mat

Material: 100% SRB Rubber

Size: 2440mm x 1200mm x 12mm

Weight: 43.6kg

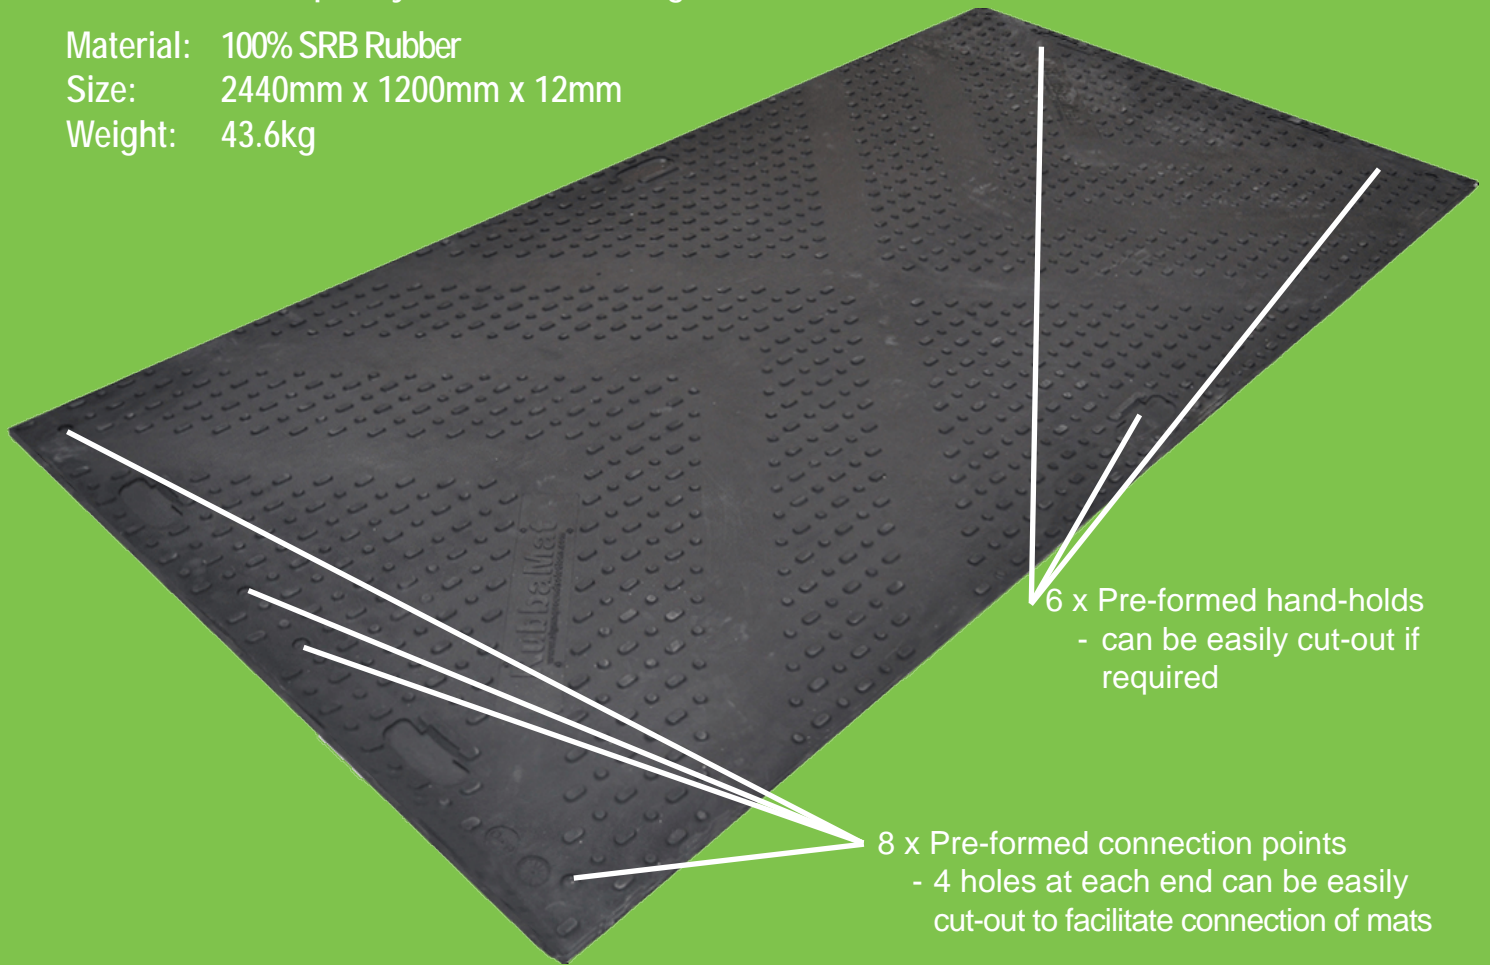

6 x Pre-formed hand-holds
- can be easily cut-out if required

8 x Pre-formed connection points
- 4 holes at each end can be easily cut-out to facilitate connection of mats

Applications

- » Reduces risk of damage to decorative stone surfaces during construction, maintenance and civil engineering projects
- » Greater pedestrian, buggy or wheelchair safety over kerbs and pathways during construction and repair
- » Protection for sensitive surfaces such as internal flooring in lobbys and atriums
- » Flexible flooring for use in equestrian and livestock compounds
- » Protective and flexible flooring for use in industrial / factory / production line applications
- » Protective matting for delicate or sporting grounds when used for leisure events
- » Flexible pedestrian walkways, especially over uneven ground such as when used on building / construction sites
- » Temporary emergency access routes

Technical Product Information

For use as a technical guide only

RubbaMat™ Temporary Access & Flooring Mat

Material: 100% SBR rubber (Styrene-Butadiene Rubber)
 Size: 2440mm x 1200mm x 12mm (core thickness)
 Weight: 43.6kg
 Colour: Black

	Test Method	Unit	Specification
Hardness	D2240	Shore A	40 to 60
Tensile Strength	D412	MPa	4.0 min
Elongation	D412		150% min
Water Immersion 48h @70°C	D471		+5% max
Compression 22h at 70°C	D395		25% max
Accelerated Aging 96h at 70°C	D573		
Harness Change		Shore A	+8 max
Tensile Change			-15% max
Elongation Change			-20% max



zigma[®]
Ground Solutions
 The fast and safe way forward

RubbaMat™ is available for worldwide sale or hire through our official distributors and agents - please contact us for further details.

UK Head Office:
 Tel: +44 (0) 8456 435 388

Unit 11, M11 Business Link,
 Parsonage Lane, Stansted,
 Essex CM24 8GF. UK

Sales office - Ireland:
 Tel: +353 (0) 91 766 878

Sales office - US:
 Tel: +1-877 775 4403

sales@zigmagroundsolutions.com
 www.zigmagroundsolutions.com

*Load performance depends on ground conditions as well as the weight and type of vehicles and plant. Zigma® Ground Solutions Ltd, its agents or employees are not liable for any damage to existing ground or property through use of RubbaMat™. The sale or hire of all temporary access mats are subject to Zigma® Ground Solutions' standard Terms and Conditions. These are available from our website www.zigmagroundsolutions.com or by telephoning our sales office.

Health and Safety Information

General

Critical hazards to man and environment	None
Environment	The disposal of the material presents no danger regarding toxicological or ecological considerations. Due to low water solubility, bio-availability unlikely.
Solubility in water	Insoluble
Regulatory	Not classified as hazardous under transport regulations.

Safety Properties

Flammability	Does not ignite spontaneously, burns only when introduced into source of fire
Stability and reactivity	No possibility of degradation under normal circumstances. Degradation will only occur above the decomposition temperature.
Toxicology	Not harmful to health under normal conditions.