

Uniflo Products Ltd

Sanitary Waste Pumps



Uniflo-Flush/1 Toilet only Macerator

The Uniflo-Flush/1 complete with the standard front entry WC inlet. This unit comes complete with 1 inline non-return valve. The waste pumped outlet operates best when installed in 32mm but can be increased to 40mm pipe work if totally necessary.

The macerator is fully automatic, it has a very powerful 600w motor. The compact design will blend in with any bathroom / cloakroom installation, it also includes easy access for servicing, making this product a good choice in waste removal.

IDEAL FOR CLOAKROOM /
CELLAR / LOFT AND
BASEMENT CONVERSIONS.

Technical Data:

Input Voltage AC 220-240v, 50hz

Input Power 600w


Protection IPX4

Max Input Flow: 16,00L / min

Output flow 240L / min



Uniflo Flush 1
Macerator Pump Dimensions

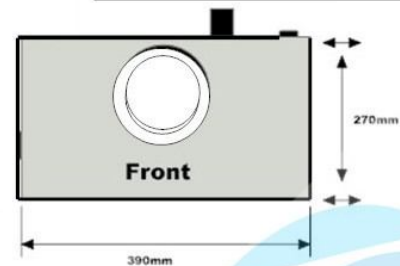

The Macerator unit is designed to grind up and pump away sanitary waste from toilets.

The unit works on air pressure, when the toilet is flushed waste water enters the unit causing air pressure to build up inside the air pressure switch, this then activates the motor and pump which drives the cutting blades to grind up the waste and pump the liquid through the outlet via small bore pipe work to the sewer or soil stack, making it possible to install a toilet virtually anywhere in the home.

Further advice and sales
info@unifloproducts.co.uk
www.unifloproducts.co.uk

