

# Uniflo Products Ltd

## Sanitary Waste Pumps



### Uniflo-Flush/3 Macerator

The Uniflo-Flush/3 complete with the standard front entry WC inlet, a top left inlet and a further additional side inlet to accommodate other bathroom fixtures i.e.: high stepped raised shower tray, basin, raised bath or bidet. Any of the inlets can be blanked off if not needed making this unit ideal for a number of installation. This unit comes complete with 2 inline non-return valves. The waste pumped outlet operates best when installed in 32mm but can be increased to 40mm pipe work if totally necessary.

The macerator is fully automatic, it has a very powerful 600w motor. The compact design will blend in with any bathroom installation, it also includes easy access for servicing, making this product a good choice in waste removal.

**IDEAL FOR CELLAR / LOFT  
AND BASEMENT  
CONVERSIONS.**



#### Technical Data:

Input Voltage AC 220-240v, 50hz


Input Power 600w

Protection IPX4

Max Input Flow: 16,00L / min

Output flow 240L / min

### Uniflo-Flush 3 Way Macerator Pump Dimensions

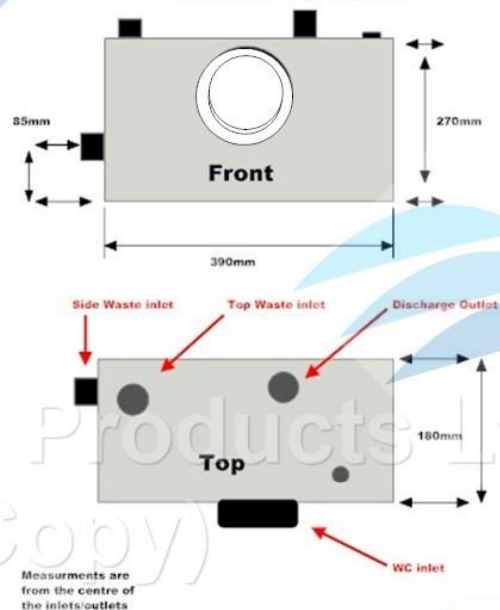

The Macerator unit is designed to grind up and pump away sanitary waste from toilets and bathroom fixtures.

The unit works on air pressure, when the toilet is flushed or a basin is used. The waste water enters the unit causing air pressure to build up inside the air pressure switch, this then activates the motor and pump which drives the cutting blades to grind up the waste and pump the liquid through the outlet via small bore pipe work to the sewer or soil stack, making it possible to install a bathroom virtually anywhere in the home.

Further advice and sales  
[info@unifloproducts.co.uk](mailto:info@unifloproducts.co.uk)  
[www.unifloproducts.co.uk](http://www.unifloproducts.co.uk)

