

881 series sight glass flowmeters in cast iron, steel or stainless steel



**Straight through with spout**

Ideal for gravity feed systems, intermittent flow, liquids containing entrained air and low flow rates. This model has an integral drip lip and can be mounted in any pipeline position.

**Rotor**


This model has a rotor to show you if the liquid is flowing. The indicator can be mounted in any pipeline position, and the light weight rotors will operate over a wide flow range.

**Flap**

The basic model is suitable for horizontal and vertically upward flow.

- Cast Iron, Steel & St.St. designs
- Soda Lime or Borosilicate glass
- Sizes up to 2"
- Pressure ratings up to 40 Bar

**Dimensional Information**

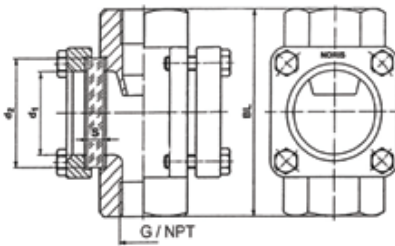

BSP or NPT female connections	BL	d <sub>1</sub>	Glass plate			
			d <sub>2</sub>	S		
				16 bar	25 bar	40 bar
1/4" 3/8" 1/2"	100	32	45	10	10	10
3/4" 1"	120	48	63	10	12	15
1 1/4" 1 1/2"	160	65	80	12	15	20
2"	230 180(GG)	80	100	15	20	25

**Options & Ordering Information**

