


## BKS band re-saw

The flexible saw where highest accuracy is achieved

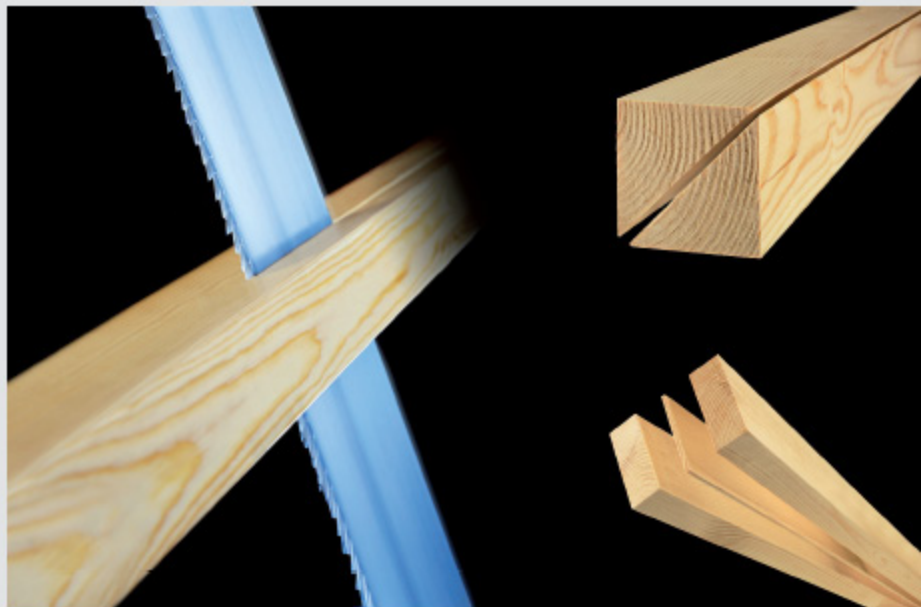

## BKS – for profitable re-sawing

### BKS band re-saw

- Electronic feed
- Tiltable fence side
- Hydraulic band tensioning
- Band guides
- Effective band and wheel cleaning
- Operator panel with PLC for:
  - Feed speed
  - Position of feed roller
  - Position of fence side
  - Production counter
  - Band speed (require frequency controlled band speed)
- Idle in- and out-feed rollers (for long and heavy pieces)
- Frequency controlled band speed, 30-40 m/s





Stable band re-saw for carpentry and producers of mouldings with high demand for accuracy and long life time. The BKS is equipped with frequency controlled feed speed, 5-40 m/min. A very high accuracy is obtained through the hydraulic band tensioning. Thanks to simple and fast settings high productivity is achieved.



#### 1 Band cleaning

To achieve highest possible accuracy, wheels and band is cleaned automatically with scrapes and lubricated pads.

#### 2 Tilttable fence side

Tilttable fence side for bevel ripping up to 45°. Specially developed for bevel siding, moulding and certain package manufacturers.

#### 3 Operator panel

User friendly operator panel with digital presentation of feed roller and fence side position as well as adjustable feed and band speed.

#### 4 Laser positioning

In order to effectively split random width boards, as an option, a laser beam measure each board and the saw automatically position itself after confirmation from the operator with a foot pedal.

#### Technical data

Feed speed	5-40 m/min
Max distance saw band – fence side	310 mm
Max distance saw band – feed roller	235 mm
Max cutting depth	370 mm
Saw wheel diameter	915 mm
Saw wheel width	90 mm
Band dimension	5845x10x1,0 mm

## BKS band re-saw



WACO JONSEREDS AB  
Box 283  
SE-301 07 Halmstad

Telephone +46 35 17 67 00  
Fax +46 35 17 67 80  
E-Mail [info@waco.se](mailto:info@waco.se)  
Internet [www.waco.se](http://www.waco.se)