

**British Products for Outdoor People**



**SCH**  
**(SUPPLIES) LIMITED**



**MANUFACTURERS & SUPPLIERS  
OF ESTATE & GARDEN MACHINERY**

**2015**



*"If you don't find  
what you are looking  
for in this brochure -  
Give our sales team a  
ring to discuss your  
requirements"*

**Andrew Rodwell**  
Managing Director



<b>SPRAYERS</b>	<b>2-7</b>
<b>ESTATE &amp; GARDEN WATER UNITS</b>	<b>8-9</b>
<b>TRAILERS &amp; TROLLEYS</b>	<b>10-23</b>
<b>GRASS CARE</b>	<b>24-33</b>
<b>TURF CARE</b>	<b>34-39</b>
<b>ROLLERS</b>	<b>40</b>
<b>SWEEPERS &amp; COLLECTORS</b>	<b>41-44</b>
<b>BROADCASTERS &amp; SPREADERS</b>	<b>45-47</b>
<b>FLAIL MOWERS</b>	<b>48-49</b>
<b>SPORTS - MAINTENANCE &amp; BRUSHES</b>	<b>50-57</b>
<b>EQUESTRIAN</b>	<b>58-66</b>
<b>SMALLHOLDING</b>	<b>66-67</b>
<b>WATERERS &amp; BOWSERS</b>	<b>68-74</b>
<b>PEOPLE CARRIERS &amp; GAME CARTS</b>	<b>75-77</b>
<b>FUN TRAINS</b>	<b>78-79</b>

**+44 (0)1473 328272**  
**www.schsupplies.co.uk**  
**sales@schsupplies.co.uk**



# Sprayers



## Optional Extras

**SPRAY BOOM COVER**  
(REF: PSC)



**DRIBBLE BAR**  
(REF: PSPDB)



## PROFESSIONAL POWER SPRAYER (REF: PSP)

The sprayer is mounted on a three wheel robust tray chassis. The two leading wheels are pneumatic; the rear castor wheel acts as a line marker. The pump is a 12 volt diaphragm pump powered from its own integral battery. (A charger is supplied with each machine). A pressure gauge and a by-pass regulator are fitted for the hand lance. The pump is run on a pressure system which means that when the spray is 'shut off' the pump 'shuts down'; open and the pump restarts.

The low to ground 4 nozzle boom, minimises drift and therefore 'close to edge' work can be carried out.

A brass trigger lance is supplied for spot spraying etc.

The handles are adjustable to suit the operator. A tow bar is supplied with each machine. The average spray time per battery charge is approximately 5 hours normal spray use, (3.5 hours intermittent) this is for continuous spraying obviously, on /off time; refill and movement actions will enhance overall spray time.

**Pump delivery** 3.8L/min (open flow)  
Higher flow pumps can be fitted on request.

**Capacity** 30 litres

**Spray width** 915mm (36")

**Wheel size** 400 x 4 pneumatic

**Weight empty** 35kg

### Optional Extras Available

- Spray boom cover
- Dribble bar
- Foam marker kit
- Extension to the brass hand lance
- Delivery hose
- Wider spray coverage booms
- Pumps up to 18 lpm output can be fitted

## Variations To Standard PSP

**FOR ROUGH TERRAIN**  
(REF: PSPRG)



**MULTI NOZZLE SPRAYER**  
(REF: PSPMN)



**FOR NARROW ACCESS**  
(REF: PSPNG)





## PROFESSIONAL POWER SPRAYER

(REF: PS22)

The PS22 is fitted with a larger pump than the PSP - flow rate 7 lpm (higher flow rate pumps can be supplied). This sprayer is fitted with a large break back boom with a spray width of 2440mm (96"); the two outer nozzles of the boom can be turned off to give a narrow spray width if required.

A high capacity 22amp hour battery is fitted.

The average spray time per battery charge is approximately 5 hours normal spray use, this is for continuous spraying obviously, on /off time; refill and movement actions will enhance overall spray time.

The sprayer is mounted on a tricycle type configuration, making the unit easy to operate and manoeuvre.

A 12 volt battery charger and hand trigger lance are supplied with each unit.



### Specification

<b>Pump delivery</b>	7l/min
<b>Tank Capacity</b>	30 litres
<b>Min spray width</b>	915mm (36")
<b>Max spray width</b>	2440mm (96")
<b>Wheel size</b>	400 x 4
<b>Weight empty</b>	35kg

### Optional Extras Available

End hoods for break back boom
Dribble bar
Foam marker kit
Tow bar
Extension to brass hand lance
Delivery hose
Different width spray booms



## COMPACT POWER SPRAYER

(REF: GBS5)

This low cost unit is designed to replace the knapsack sprayer. The sprayer pump is powered by its own rechargeable dry cell battery. The battery and charger are included with this unit. The compact sprayer is mounted on a chassis having four 200mm (8") rubber tyre wheels making it extremely stable and easy to manoeuvre.

**The unit is supplied as standard with:**

A three nozzle spray boom giving a spray width of 1220mm (48")

A brass hand trigger lance, for spraying plants, trees, shrubs and spot spraying docks, nettles etc. This can be adjusted for use as a wide band sprayer by changing to the fan pattern nozzle or a wide angle nozzle supplied.

### Specification

<b>Tank capacity</b>	25 litres (5 gallons)
<b>Overall width</b>	430mm (17")
<b>Wheel size</b>	PD200 12.7/38
<b>Weight empty</b>	17kg





# Sprayers



## 180 litre (40 gallon) SPRAYER (Ref: GWCS9)

The GWCS9 is a versatile sprayer for applying herbicides and fertilisers to both large and small areas with ease. The four nozzle spray boom is one of the main features of the sprayer. The two outside nozzles are fitted to a 'break back' section of the boom. When the operator accidentally navigates the boom into a solid object, a tree, garden bench or similar the outside section of the boom will fold back minimising the risk of damage. The two outside nozzles can be individually isolated to give a narrow spray width from the centre two nozzles. The spray boom is height adjustable to accommodate different towing heights. The whole boom lifts off for safe storage.

The 12 volt diaphragm pump is powered from the tractor battery. In-line filters are incorporated to prevent, as far as possible, irritating stoppages from blocked nozzles. The spray nozzles are mounted on anti-drip holders which means that when the pump is 'shut down' liquid does not continue to flow. A brass hand trigger lance, complete with quick and simple twist connectors, is supplied with each sprayer. This lance is invaluable for spot spraying around trees, shrubs etc. A 5 litre wash bottle is mounted on the chassis of the sprayer for dowsing down in case of skin contact with spray liquid.

The maximum spray width is 2440mm (96"). With two wing booms folded back and switched off, the spray width reduces to 1220mm (48")

### Specification

<b>Tank capacity</b>	180 litres (40 gallon)
<b>Pump</b>	12 volt, 7 litres per min at 50 psi (max)
<b>Spray width</b>	2440mm (96")
<b>Boom folded</b>	1220mm (48")
<b>Width of sprayer (without boom)</b>	860mm (34")
<b>Wheels</b>	15/.600 x 6
<b>Towing hitch</b>	Clevis hitch standard, 50mm Ball hitch optional.
<b>Weight empty</b>	45kg



## Optional Extras For Sprayer GWCS9

### DRIBBLE BAR

(REF: GWADB)

The dribble bar can be fitted to give safe spraying on roads, drives or paths.



### HAND LANCE SHROUD

(REF: GWCSHLS)

The hand lance SPRAY GUARD. This spray guard can be used where drift is critical. An extension hose can be fitted so spraying can be carried out in areas which are not accessible to the tractor.



### NEW

### SPRAY FRAME (REF: GWTHB)

The 'H' spray frame fitted to the rear of the sprayer allows vertical row spraying. The two booms are individually controlled. 'H' Boom spray frame can be designed to customers own requirements.



# Sprayers



## ATV/QUAD MOUNTED SPRAYERS

(REF: Q4PS)

The specifications are as below, mountings differ, and are designed to fit onto ATV storage bars. 70 litre capacity tanks only are suitable for Q4PS.



4 MPS

## THREE-POINT LINKAGE SPRAYERS

70 Litre capacity (REF: 4MPS)

125 Litre capacity (REF: 4MPS/125)

These compact and versatile sprayers are ideal for all ranges of compact tractors fitted with category 1 three point linkage.

The sprayer has an integral 12 volt diaphragm pump powered by the tractor's own battery via a connection lead. The sprayers illustrated have a capacity of 70 litres or 125 litres and is supplied as standard with a hand lance and a 4 nozzle boom. The lance is ideal for spot application of weed killers to nettles and docks. The lance and boom are easily changed over by means of quick release couplings.

All Mounted Sprayers are equipped with a 5 litre fresh water washing bottle.

Specification	4MPS	4MPS/125
Tank Capacity	70 ltrs (15 gallons)	125 ltrs (27 gallons)
Spray width	2440mm(96")	2440(96")
Pump delivery (open flow)	7l/min	7l/min
Dry weight (kg) (approx)	15	18
Full weight (kg) (approx)	84	150



4 MPS/125



Hand Lance





Call Us: 01473 328272 Email: [sales@schsupplies.co.uk](mailto:sales@schsupplies.co.uk)

Product Search

To access information of these sprayers, simply note the reference of the product you wish to look at, go to our website at [www.schsupplies.co.uk](http://www.schsupplies.co.uk), search for the product code (bottom right hand corner). You will be able to see brief details of your chosen product. If this is not quite what you had in mind please contact us.



SG01



SG02



SG03



SG04



SG05



SG06



SG07



SG08



SG09



SG10



SG11



SG12



# Estate & Garden Waterers



## 180 LITRE (40 GALLON) TOWED WATER CART (REF: GWC)

A useful small water tanker for watering trees, shrubs and plants in dry weather. The tanker may also be used for carrying drinking water to animals. The water is discharged through a 3/4" tap at the rear.

A front jack leg is fitted as standard.

**Wheels** Pneumatic 400 x 8  
**Capacity** 180 litres (40 gallons)  
**Weight empty** 38kg



## 180 LITRE (40 GALLON) TOWED WATER CART, PUMP DISCHARGE (REF: GWC(E))

Generally as above with the addition of a 12 volt pump discharge

**Capacity** 180 litres (40 gallons)  
**Pump** 12 volt submersible  
(powered from the tractor battery)  
**Flow rate** 12 litres (2.63 gallons)  
per minute  
**Hose** 3.5 metres (11.5') x 1/2"  
heavy duty hose  
**Wheels** Pneumatic, 400 x 8  
**Dimensions** Length: 1650mm  
including tow bar,  
Height: 1000mm,  
Width: 775mm  
**Weight empty** 38kg



## SOLAR POWERED WATER UNIT 180 LITRE (40 GALLON) (REF: UWU)

Another first from SCH. The water pump is powered by a 12 volt battery which is recharged from a built in solar panel.

The unit is easily manoeuvred on its four wheel pneumatic wheels with needle bearings. The tank holds a generous 180 litres (40 gallons) of water.

The watering lance has a multi head dispenser and is telescopic with a simple on/off control. Six metres of hose is supplied with each machine. The width of the water unit is 1100mm (44").



## GARDEN WATERING UNIT (REF:GWU(E)) (REF:GWU(P))

The garden watering unit is an extremely useful water transporter to carry much needed water to areas where hose pipes etc. are not practicable.

The petrol powered pump delivers water to the required area through a rose nozzle which can be removed to convert to a single stream flow. An on/off device is fitted to the delivering end of the dispensing hose. The waterer is mounted on a single axle chassis. The tow bar has our standard clevis and pin coupling. A 50mm ball hitch can be fitted as an option.

The unit can be filled from an external source- ponds, tanks etc. This adaption must be requested at time of order.

**Specifications:** Tank capacity: 270 litres (60 gallons), Delivery hose: 6 metres of 3/4" hose, Overall width: 950mm (37"), Overall length: 2550mm (100"), Pumps: Electric - 12volt pump powered from the towing vehicle or from an independent rechargeable battery, Petrol - 1" Centrifugal pump, Flow rates: Electric - 18 litres (4 gallons) per minute, Petrol - 150 litres (33 gallons) per minute, Wheel size: 16/650 x 8, Approx weight empty: 100kg.



## 600 LITRE (132 GALLON) TANK - ELECTRIC PUMP (REF:WC(E)) 600 LITRE (132 GALLON) TANK - PETROL PUMP (REF:WC(P))

These units are suitable for tractors of 14HP and above (including ATVs)

The caged tank is secured to a flatbed trolley with the pump unit mounted separately on the front of the unit.

When the unit is not required for watering the tank can be removed to give a useful 4 wheel trolley.

**Specifications:** Tank capacity: 600 litres (132 gallons), Pumps: Electric - 12volt pump powered from the towing vehicle battery or from an independent rechargeable battery, Petrol - 1" Centrifugal pump, Flow rates: Electric - 18 litres (4 gallons) per minute, Petrol - 150 litres (33 gallons) per minute, Hose: 6 metres (20') heavy duty hose, Wheel size: 500 x8, Tow hitch: Clevis hitch as standard, Dimensions: L - 2220mm x including tow bar x W - 1200mm x H - 1360mm.



## 900 LITRE (200 GALLON) TANK - ELECTRIC PUMP (REF:EWC(E)) 900 LITRE (200 GALLON) TANK - PETROL PUMP (REF:EWC(P))

These units are suitable for tractors of 18HP and above (including ATVs)

The caged tank is secured to a flatbed trolley with the pump unit mounted separately on the front of the unit.

When the unit is not required for watering the tank can be removed to give a useful 4 wheel trolley.

**Specifications:** Tank capacity: 900 litres (200 gallons), Pumps: Electric - 12volt pump powered from the towing vehicle battery or from an independent rechargeable battery, Petrol - 1" Centrifugal pump, Flow rates: Electric - 18 litres (4 gallons) per minute, Petrol - 150 litres (33 gallons) per minute, Hose: 6 metres (20') heavy duty hose, Wheel size: 500 x8, Tow hitch: Clevis hitch as standard, Dimensions: L - 2500mm including tow bar x W - 1430mm x H - 1600mm.



### OPTIONAL EXTRAS FOR ALL MODELS INCLUDE

Rose Nozzle • Suction refill on petrol models • 50mm Ball Hitch • Extension Hose  
• Rechargeable Battery • Hose Reel



## THE IRRIGATION UNITS (REF:IGU & IGUL)

These two units are extremely useful for ground watering of young trees, shrubs etc. from static water sources, ponds, lakes or holding tanks. They can be also used as 'first aid' fire pumps. The 2" pumps with their reliable Honda engines can deliver up to 110 gallons per minute. The flow is adjustable. The reel on the IGU will accommodate 80 metres of 1" hose or 120metres of 3/4" hose (Hose is not supplied unless requested).





# Trailers & Trolleys



## FOUR WHEEL TURN TABLE TROLLEYS

(REF: FBT1 - FBT2 - FBT3)

The SCH budget range of four wheel turn table trolleys, with a carrying capacity of up to 300 kgs (5 cwt) are ideal for smallholders, builders, stables etc.

The trolleys run on four pneumatic wheels c/w bearings. The design of the handle allows the trolley to be pulled by hand or mechanically towed. 300mm (12") head boards may be added as an optional extra.



### Specification

	FBT1	FBT2	FBT3
<b>Width of body</b>	460mm (18")	760mm (30")	915mm (36")
<b>Length of body</b>	760mm (30")	1230mm (48")	1800mm (72")
<b>Wheel size</b>	400 x 4	400 x 8	400 x 8
<b>Weight</b>	49kg	65kg	71kg



## BALANCE CART TRAILER (REF: BCT)

The two wheel balance cart can either be manually pushed or it can be towed. A tow bar replaces the support foot. In either mode the sides can be hinged down or completely removed.

The wheels being mounted in board makes this a useful load carrier where there are width restrictions.

### Specification

<b>Carrying capacity</b>	500 kg (10 cwt)
<b>Width of body</b>	760mm (30")
<b>Length of body</b>	1500mm (60")
<b>Wheels size</b>	400 x 8 with bearings
<b>Weight</b>	95kg





## BUDGET TRAILER (REF: DTSB)

This low cost budget metal trailer is ideal in situations where light to medium duties are required. The trailer has full tipping facilities. (We do not manufacture extension sides for this trailer).

### Specification

<b>Carrying capacity</b>	350kg (8 cwt)
<b>Width of body</b>	760mm (30")
<b>Length of body</b>	1220mm (48")
<b>Depth of body</b>	380mm (15")
<b>Overall width</b>	840mm (33")
<b>Overall length</b>	1753mm (69")
<b>Wheel size</b>	400 x 8 with bearings
<b>Weight</b>	30kg



DTSB Tipping



## TIPPING DUMP-TRAILER - WIDE PROFILE WHEELS (REF: GDTT)

A special feature of this metal bodied tipping trailer is its wide profile wheels complete with bearings to prolong their life. The wide wheels mean that "track marks" are kept to a minimum. A manual push/pull handle is fitted to all dump trailers (excluding DTSB), to make them easy to manoeuvre when used away from the tractor. The manual handle is a must for those of us who find reversing difficult or even impossible.

### Specification

<b>Carrying capacity</b>	500kg (10 cwt)
<b>Depth of body</b>	380mm (15")
<b>Width of body</b>	860mm (34")
<b>Length of body</b>	1244mm (49")
<b>Overall width</b>	955mm (38")
<b>Wheel size</b>	Pneumatic 15/600 x 6 (with bearings)
<b>Tipping mechanism</b>	Positive spring bolt action
<b>Weight</b>	45kg

### Optional Extras

#### Extension sides (Ref: GDTX)

300 mm (12") Bolt on heavy duty mesh sides as illustrated.

#### 50mm ball hitch



With extension sides (REF: GDTX)



Hand handle



# Trailers

## TIPPING DUMP TRAILER- GALVANISED BODY- WIDE PROFILE WHEELS

(REF: GDTT/GALV)

The specification, with exception of the galvanised body, is the same as the dump trailer (Ref: GDTT). The trailer has tipping facilities and a useful handle for manoeuvring the trailer.

**Weight** 45kg

### Optional Extras

**12" Mesh Extension sides** (Ref: GDTX)  
**50mm ball hitch**



## LARGE CAPACITY, GALVANISED BODIED TRAILER

(REF: GT/GALV)

This large capacity 500kg (10 cwt) metal bodied dump trailer will transport your bulky loads of leaves, grass cuttings, logs, compost, etc. with ease.

The tailgate is removable to make emptying when tipped a simple task.

### Specification

<b>Carrying capacity</b>	500kg (10 cwt)
<b>Cubic capacity</b>	33 cubic ft.
<b>Depth of body</b>	660mm (26")
<b>Width of body</b>	860mm (34")
<b>Overall width</b>	1040mm (41")
<b>Length of body</b>	1244mm (49")
<b>Tipping mechanism</b>	Positive spring bolt action
<b>Wheel size</b>	Wide profile 16/650 x 8 pneumatic with bearings
<b>Weight</b>	84kg

**Optional Extra**  
**50mm ball hitch**





## PLASTIC BODIED TRAILER

(REF: PTP)

The body being moulded from a strong commercial grade plastic means it will stand the carting of corrosive material (animal waste etc.) without causing body rot.

The trailer has a simple tipping mechanism for easy emptying. The two roller bearing pneumatic wheels help to reduce wheel marks on soft surfaces.

A manual handle is fitted as standard to assist in manoeuvring the trailer when used away from the towing vehicle.

### Specification

<b>Body width</b>	830mm (32")
<b>Body length</b>	1350mm (53")
<b>Body depth</b>	400mm (16")
<b>Carrying capacity</b>	500kg (10cwt)
<b>Wheel size</b>	15/600 x 6 with bearings
<b>Weight</b>	36kg

### Optional Extra

**50mm ball hitch** (order at time of manufacture)



## TRAILER BARROW

(REF: PTPTB)

The trailer/barrow is styled on our popular PTP plastic-bodied trailer with a strong moulded rot proof plastic body. The barrow handles are incorporated in the chassis, with an additional towbar to allow the barrow to be towed when required.

### Specification

<b>Body width</b>	830mm (32")
<b>Body length</b>	1350mm (53")
<b>Body depth</b>	400mm (16")
<b>Carrying capacity</b>	500kg (10cwt)
<b>Wheel size</b>	15/600 x 6 with bearings
<b>Weight</b>	38kg





# Large Plastic Bodied Trailers



## LARGE CAPACITY PLASTIC BODY TRAILER (REF: LCPTP)

The large plastic trailer fills a gap in our comprehensive trailer range where a bulk, rot proof, transporter is required. The wide profile wheels, on four stud roller bearing hubs, fitted as standard, gives the trailer stability over rough or wet ground. The chassis is built of strong steel giving the plastic body the necessary support.

The trailer tipping device is simple to operate. An extendable tipping handle makes the tipping operation an easy task. The towing hitch is a 50mm ball coupling. Other hitches available on request.



### Specification

<b>Body width</b>	1000mm (39")
<b>Body length</b>	1600mm (63")
<b>Body height</b>	500mm (20")
<b>Overall length</b>	2440mm (96")
<b>Overall width</b>	1550mm (61")
<b>Wheel size</b>	20 x 10-8 (4 stud with ball bearings and steel Hubs)
<b>Weight</b>	110kg





## 4 WHEEL TIMBER 15 CWT TRAILER (REF: GWT 415)



The four wheel trailer (GWT415) is a heavy duty turn table trailer. The trailer can be pulled by the standard clevis hitch provided (a ball hitch attachment can be fitted as an optional extra). The trailer also has as a standard fitting a hand pull handle which simply clips into the clevis hitch. These two pulling positions make the trailer a very useful dual purpose unit. The 300mm (12") sides and tail board are hinged and can be let down as required or removed completely to give a platform trolley. The wheels being mounted under the chassis allows the sides to drop down unhindered. The head board is fixed. The optional extension sides double the cubic cargo space for carrying bulky materials.



### Specification:

<b>Carrying capacity</b>	760kg (15cwt)
<b>Hinged sides</b>	300mm (12")
<b>Width of body</b>	915mm (36")
<b>Length of body</b>	1800mm (72")
<b>Wheel size</b>	wide profile with bearings 16/650 x 8
<b>Weight</b>	130kg

### Optional Extras

**Extension sides** (Ref: GWTX415) Four easily removable heavy duty 450mm (18") high extension sides as shown.





# Trailers

## 2 WHEEL TIMBER 10 CWT TIPPING TRAILER (REF: GWTS 10)



A strongly constructed timber bodied trailer for use behind garden tractors. The tailgate is removable for the efficient discharge of material when tipped. The sides are hinged and can be completely removed if required to give a platform body with a fixed head board. The trailer is fitted with wide profile pneumatic wheels complete with bearings. Extension sides may be fitted.

### Specification

<b>Carrying Capacity</b>	500kg (10cwt)
<b>Hinged sides</b>	300mm (12")
<b>Width of body</b>	787mm (31")
<b>Length of body</b>	1524mm (60")
<b>Wheel size</b>	Wide profile with bearings 15/600 x 6
<b>Weight</b>	95kg

### Optional Extras

#### 50mm Ball Hitch

**Extension sides** (Ref: GWTX10). Four easily removable heavy duty 300mm (12") high extension sides as shown.



## 2 WHEEL TIMBER 15 CWT TIPPING TRAILER (REF: GWTS 15)



A two wheeled, timber bodied, tipping trailer with 760kg (15cwt) carrying capacity. The tailgate and sides are easily removed to give a generous sized platform truck with a fixed head board. The wide profile bearing wheels have a surface contact area of 200mm (8") making the trailer extremely stable under load. The wide wheels minimise track marks. Extension sides may be fitted.

### Specification

<b>Carrying capacity</b>	760kg (15 cwt)
<b>Hinged sides</b>	300mm (12")
<b>Width of body</b>	915mm (36")
<b>Length of body</b>	1800mm (72")
<b>Wheel size</b>	Wide profile with bearings 16/650 x 8
<b>Weight</b>	105kg

### Optional Extras

#### 50mm Ball Hitch

**Extension sides** (Ref: GWTX15) Four easily removable heavy duty 450mm (18") high extension sides shown.



As Flatbed with sides removed (green chassis optional)



## HYDRAULIC TIPPING TRAILERS (REF: HTRL)



12v Electric



With extension sides



Manual Hydraulic

The hydraulic tipping trailer has been designed for use behind compact tractors. The head board is fixed, the two sides and tailgate drop down. The trailer has a carrying capacity of 1 ton. A clevis hitch is supplied as standard. Ball hitch or ring can be fitted at extra cost.

### Specification:

<b>Carrying capacity</b>	1000kg (1ton)
<b>Hinged sides</b>	300mm (12")
<b>Width of body</b>	915mm (36")
<b>Length of body</b>	1800mm (72")
<b>Wheel size</b>	600 x 9 ball bearings with hubs
<b>Weight</b>	187kg

The ram may be fitted with a double or a single pipe system.

## TIPPING TRAILER VARIATIONS

The tipping mechanism on SCH tipping trailers is supplied in three different mechanical forms.

1. Powered from the tractor's hydraulic system (single or double pipe systems supplied according to tractors spool – Ref: 1 or 2)
2. 12 volt hydraulic power pack – Ref: E
3. Manual action hydraulic pump – Ref: M

Type	Power System	Reference
2 wheel	Tractor 1 pipe	HTRL1
2 wheel	Tractor 2 pipe	HTRL2
2 wheel	12 Volt	HTRLE
2 wheel	Manual	HTRLM

You can now have all the advantages of a powered tipping trailer behind tractors not having hydraulic facilities.

### Optional Extras

450mm (18") mesh extension sides – Ref: HTRLX

Ball, Ring hitch or single tongue (Clevis supplied as standard)



## BIN TRAILER (REF: BT1)

Our bin trailer is used on many sites where waste bins have to be collected and transported to a central disposal point. Caravan parks, zoos, public areas are among the many users.

Bin trailers are manufactured to the customers own requirements.

The trailer illustrated was constructed for a marina and is being towed by a fork lift truck. Galvanised finish can be supplied in lieu of our standard paint finish.

### Specification as illustrated

<b>Carrying capacity</b>	500kg (10cwt)
<b>Overall width</b>	1400mm (55")
<b>Overall length</b>	1100mm (43")
<b>Tailgate length</b>	870mm (34")
<b>Wheels</b>	16/650 x 8

### Optional Extras

- 50mm ball hitch
- Jockey wheel
- Winch



Shown with optional jockey wheel and winch

## FENN TRAILER (REF:TCT)

The fenn trailer has been especially designed for use by gamekeepers and ghillies for the purpose of animal retrieval. The mesh chassis makes it a strong light weight trailer easy to clean down. Its wide profile low ground pressure wheels makes transport over uneven or boggy ground possible. The chassis/mesh may be galvanised as an optional extra. Other sizes and specifications can be built as required.

A 50mm ball hitch is fitted as standard.

### Specification

<b>Carrying capacity</b>	500kg (10cwt)
<b>Width of body</b>	915mm (36")
<b>Length of body</b>	1220mm (48")
<b>Overall length</b>	2210mm (87")
<b>Wheels</b>	20-10 x 8 pneumatic

### Optional Extras

- Tailgate
- Winch



Optional Extras - Tailgate and Winch



## HANDY MOVER (REF: NTT)

Trees are expensive and can be easily damaged – The SCH tree transporter is ideal for the landscape contractor, limiting any chance of harm in transit to the point of planting. The tree unit runs on two pneumatic wheels (15-600 x 6) and has a large carrying platform, the frame is designed so that the weight of the load is evenly distributed.





## TIPPING DUMP TRAILER GALVANISED BODY - FLOTATION WHEELS (REF:QDT)



The body specification is the same as the galvanized dump trailer (REF: GDTT/GALV). The trailer is fitted with wide flotation wheels with ball bearings and a 50mm ball hitch. The hand handle has been removed to prevent fouling the rear of the ATV and the tow bar has been extended to enable easier reversing. Optional 12" extension sides may be fitted to the trailer (REF: QDXT)

### Specification

<b>Carrying capacity</b>	500kg (10 cwt)
<b>Cubic capacity</b>	22 cubic ft.
<b>Depth of body</b>	380mm (15")
<b>Width of body</b>	860mm (34")
<b>Overall width</b>	955mm (38")
<b>Length of body</b>	1244mm (49")
<b>Tipping mechanism</b>	Positive spring bolt action
<b>Wheel size</b>	Wide profile 20/10 x 8 pneumatic with bearings
<b>Weight</b>	45kg
<b>Optional Extra</b>	50mm ball hitch

## LARGE CAPACITY, GALVANISED BODIED TIPPING TRAILER - FLOTATION WHEELS (REF: QDGT)



The trailer is fitted with flotation wheels with ball bearings and a 50mm ball hitch. The hand handle has been removed to prevent fouling the rear of the ATV and the tow bar has been extended to enable easier reversing.

### Specification

<b>Carrying capacity</b>	500kg (10 cwt)
<b>Cubic capacity</b>	33 cubic ft.
<b>Depth of body</b>	660mm (26")
<b>Width of body</b>	860mm (34")
<b>Overall width</b>	955mm (38")
<b>Length of body</b>	1244mm (49")
<b>Tipping mechanism</b>	Positive spring bolt action
<b>Wheel size</b>	Wide profile 20/10 x 8 pneumatic with bearings
<b>Weight</b>	84kg



## PLASTIC BODIED TRAILER WITH WIDE PROFILE WHEELS (REF: QPTP)

This plastic bodied tipping trailer runs on wide profile wheels (20.10 x 8) mounted on ball bearing hubs. These specially mounted wide wheels are a must when operating in soft ground conditions or across unfriendly terrain.

The sturdy metal chassis gives superb support to the under side of the rot proof trailer body.

A manual handle is fitted as standard to assist in manoeuvring the trailer when used away from the towing vehicle (or for hand reversing for those of us who find reversing impossible)

The QPTP is fitted with a ball hitch as standard.

### Specification

<b>Body width</b>	830mm (32")
<b>Body length</b>	1350mm (53")
<b>Body depth</b>	400mm (16")
<b>Carrying capacity</b>	500kg (10cwt)
<b>Overall width</b>	1150mm (45")
<b>Wheel size</b>	20.10 x 8 with bearings
<b>Weight</b>	38kg



## ATV TRAILER (REF: GATV)

The GATV trailer is designed to tow mainly behind all terrain vehicles it can also be used with compact and large garden tractors.

The tailgate is hinged. The mudguards run the whole length of the trailer to give extra carrying capacity for hay and straw bales, etc.

### Specification

<b>Carrying capacity</b>	500kg (10cwt)
<b>Height of sides</b>	300mm (12")
<b>Width of body</b>	1750mm (70")
<b>Internal width</b>	1245mm (49")
<b>Length of body</b>	2200mm (86")
<b>Overall length</b>	3000mm (118")
<b>Wheel size</b>	22 x 10-8 (LGP) pneumatic with bearings
<b>Hitch</b>	50 mm ball hitch or clevis option

### Optional Extras

- 450 mm (18") or 915 mm (36") Extension sides
- Jockey wheel
- Animal cage
- Game cart top
- Lights
- Loading ramp (illustrated)



## GENERAL PURPOSE ATV TRAILER (REF: GPATV)

The GPATV is a general purpose 'off road' trailer for use behind quad bikes, ATVs etc. The trailer is supplied with fixed high mesh sides and is ideal for carrying animals or bulky loads, straw leaves, grass cuttings, logs etc.

Wide wheels (20x10-8) give the trailer good flotation over unfriendly ground; they also go a long way to preventing 'wheel lines' in fine turf. A ramp tailgate is incorporated in the build. The floor and solid sides are of a high quality phenol ply. The trailer is fitted with a 50mm ball hitch. The finish to the trailer is standard silver aluminum gloss paint.

### Specification

<b>Carrying capacity</b>	750kg
<b>Overall width</b>	1850mm (73")
<b>Overall length</b>	3.1m (118")
<b>Height of sides</b>	1500mm (59")
<b>Wheels</b>	20 x 10-8
<b>Weight</b>	247kg

### Optional Extras

- Galvanised steel work
- Checker plate alloy floor
- Jockey wheel
- Different towing hitches





# Trailer Gallery



Call Us: 01473 328272 Email: [sales@schsupplies.co.uk](mailto:sales@schsupplies.co.uk)

Product Search

To access information of these trailers, simply note the reference of the product you wish to look at, go to our website at [www.schsupplies.co.uk](http://www.schsupplies.co.uk), search for the product code (bottom right hand corner). You will be able to see brief details of your chosen product. If this is not quite what you had in mind please contact us.



TG01



TG02



TG03



TG04



TG05



TG23



TG24



TG06



TG07



TG08



TG09



TG10



# Trailer Gallery



TG11



TG12



TG13



TG14



TG15



TG16



TG24



TG18



TG19



TG20



TG21



TG22



# Grass Care - Powered Scarifier



## ROTARY RAKER (REF: RR3)

By teasing out the thatch and moss from your lawn you will make it more resistant to drought, insect and disease problems. By removing this layer of thatch the grassed area will regenerate naturally and will become more receptive to fertilisers, pest and disease control products.

The Rotary-Raker with its powerful 5.5Hp Honda petrol engine and twin 'V' belt drive rotates four rows of free floating scarifying blades which carry out the vital dethatching process.

For areas that are inaccessible to the garden tractor the unit can be manually operated with the easy attachable handle which is provided with the machine.



- Depth control adjustable
- Removes thatch and moss
- 760mm (30") working width
- Overall width 1150mm (45")
- Mounted on four heavy duty cushioned wheels
- 5.5Hp Honda petrol engine
- Twin 'V' belt drive
- Positive on/off control to the rotor
- Four rows of free floating blades
- British built - all steel welded construction
- Towed or pushed
- Weight 115kg



# 915mm (36") Budget Lawn Care System

## BUDGET ROLLER/TOOL CARRIER

(REF: BRT)

The roller/tool carrier (Ref: BRT) is the basic tool carrier for the 915mm (36") grass care system. The roller may be water ballasted for extra weight. The option of additional weight if required, can be placed in the weight tray.

<b>Working width</b>	915mm (36")
<b>Diameter</b>	360mm (14")
<b>Weight unballasted</b>	36kg (80lbs)
<b>Water ballasted</b>	122kg (270lbs)

### Optional Extras

Handle for manual use (Ref: GHC)

Ballast tanks (Ref: BT)



Complete Budget Range

## RAKE ATTACHMENT

(REF: BMR)

A multi spring tined unit which will tease out moss and dead thatch from lawns. The moss rake can also be used for "freshening up" gravel drives.

<b>Working width</b>	915mm (36")
----------------------	-------------



Roller/Tool Carrier

## SLITTER (REF: BS) AND AERATOR (REF: BA) ATTACHMENTS

These two attachments are designed to break down the surface pan of the grass to improve drainage and air penetration to the roots. The aerator is specifically designed for Autumn and early Spring use whilst the slitter can be used during other months throughout the year.

<b>Penetration depth</b>	up to 75mm (3")
<b>Working width</b>	915mm(36")



Aerator at work

## THE SPRAYER ATTACHMENT (REF: BSP)

The sprayer attachment slots into the roller. The 12 volt power sprayer pump is powered from the tractor battery (a separate battery may be supplied as an optional extra). The sprayer is ideal for applying fertiliser and/or weed killers to grassed areas. The liquid is carried in two 25 litre containers. It is supplied with a wedge nozzle giving a 915mm (36") coverage and a hollow cone nozzle for manual spraying.

Manual spraying - The trigger lance is ideal for spraying insecticides on fruit trees, shrubs and roses, it can also be used for spraying herbicides onto nettles, docks, etc.

### Supplied as standard

1220mm (48") Three nozzle spray boom (Ref: NB48).



Aerator Attachment



Slitter Attachment



# Grass Care System 1020mm (40")

## STORAGE STAND (REF: HDST)

The storage stand keeps your attachments safely in one place. The attachments with protruding profiles are kept in such a way to minimise unwanted contact with them.

The complete range of attachments for the 40" system consists of:

Lifting device	REF: HGL
Dethatcher	REF: DTC
Slitter	REF: HGS
Aerator	REF: HGA
Firming roller	REF: HFR
Brush	REF: HGB
Moss rake	REF: HGM
Hollow tine corer	REF: HGTH
Leveling lute	REF: HLL
Sprayer	REF: HGPS



## IMPORTANT!

## CARRIER FRAME

(REF: HGF)

The Heavy Duty Carrier Frame must be purchased in order to use the system. The frame consists of the tow bar, weight tray, two transport wheels and two ballast tanks. The tow bar is height adjustable.

**Overall width** 1250mm (49")



## CARRIER FRAME

LIFTER (REF: HGL)

An optional extra for the frame is our frame lifting unit (Ref: HGL). The main advantages of fitting the lifting kit are:

- The various attachments can be raised out of work at run ends
- Lifting the attachment out of work allows the frame to be reversed.
- Transportation to and from the mower area is a simple task.
- The lifter can be fitted to frames already in operation

**A useful extra but not essential**





# 1020mm (40") Grass Care System

## DETHATCHER ATTACHMENT

(REF: DTC)

The carrier frame fitted with the heavy duty dethatcher, comprises of two rows of staggered shock coiled tines which will tease out heavily matted grass and encourage tillering during the growing season. The DTC can also be used to "freshen up" gravel drives, paths and horse arenas. When full the two 25 litre ballast containers supplied with the carrying frame, can be used for extra weight if required. The transport wheels make transportation from the place of storage to the work area an easy operation.

**Working width**

1020mm (40")

**Ballasted weight** 90kg



*Can also be used on gravel drives and paths*

## SLITTER ATTACHMENT

(REF: HGS)

The carrier frame fitted with the heavy duty slitter is an ideal tool to improve drainage and root growth to grassed areas, especially in late spring and wet summers. Well drained grassed areas will help towards the prevention of moss. The two 25 litre ballast containers supplied with the carrying frame, when full, will provide extra weight to drive in the slitters. The transport wheels make transportation from the place of storage to the work area an easy operation.

**Working width** 1020mm (40")

**Ballasted weight** 90kg



## AERATOR ATTACHMENT

(REF: HGA)

The carrier frame fitted with the heavy duty aerator is an ideal tool for Autumn use breaking down the surface pan of grassed areas, improving drainage and allowing air penetration to the roots. The two 25 litre ballast containers supplied with the carrying frame, when full, will provide added weight to help penetrate hard surfaces. The transport wheels make transportation from the place of storage to the work area an easy operation.

**Working width** 1020mm (40")

**Ballasted weight** 90kg



System Continued ...



# Grass Care System 1020mm (40")



## FIRMING ROLLER ATTACHMENT (REF: HFR)

The carrier frame fitted with the firming roller is an ideal tool to "firm up" grassed areas in the Spring before the heavy growth period commences.

<b>Working width</b>	915mm (36")
<b>Diameter</b>	Domed ends 250mm (10")
<b>Ballasted weight</b>	90kg



## BRUSH ATTACHMENT (REF: HGB)

Two rows of stiff brushes make up this attachment. The brush attachment will brush in lawn top dressings and lawn sand. It will also put those much-admired stripes into the lawn.

<b>Working width</b>	1020mm (40")
----------------------	--------------



## MOSS RAKE ATTACHMENT (REF: HGM)

The carrier frame fitted with the heavy duty moss rake attachment containing one row of spring tines will tease out moss and dead thatch from lawns. This lighter rake is an ideal unit on finer grassed areas such as tennis courts and finely cut lawns. The rake can also be used for freshening up gravel drives.

<b>Working width</b>	1020mm (40")
----------------------	--------------



# 1020mm (40") Grass Care System

## HOLLOW TINE CORER ATTACHMENT

(REF: HGHT)

The hollow tine corer attachment has been added to the existing range of lawn care implements for the 1020mm (40") system. The HGHT, like the other attachments, fits easily into the carrier frame. The hollow, specially shaped tines plunge into the grass and remove a 'plug' of soil and turf, when the tine goes into the turf next time round it pushes out the previous core. The hollow tine corer leaves a neat round hole to allow top dressing, fertiliser to easily reach the roots where they are most needed. (we strongly recommend the frame lifter (Ref: HGL) is used with this attachment.

**Working width** 1020mm (40")

**No of tines per disc** 4

**No of discs** 8



## LEVELLING LUTE

(REF: HLL)

The lute attachment fitted to the Heavy Duty Frame (Ref: HGF). The lute is a useful tool for levelling soil areas prior to seeding. The lute will level and freshen up sand manèges leaving a smooth level surface. The lute may also be used on gravel drives, or to level out mole hills on the lawn.

**Working width** 1020mm (40")

The carrier frame lifter (Ref: HGL) is advised when using the lute.



## POWER SPRAYER ATTACHMENT FOR HEAVY DUTY SYSTEM

(REF: HGPS)

The sprayer attachment clips onto the carrier frame. The chemical is carried in the two 25 litre containers supplied with the sprayer. 12 volt power sprayer pump is powered from the tractor battery. The sprayer is ideal for applying fertiliser and/or weed killers to grassed areas. A brass lance is supplied with a wedge nozzle giving a 915mm (36").

A three nozzle spray boom is supplied with this sprayer.

**Manual spraying** - the trigger lance is ideal for spraying insecticides on fruit trees, shrubs and roses. It can also be used for spraying herbicides onto nettles, docks, etc.





# Grass Care System 1220mm (48")



## 48" TOWED CARRIER FRAME TOWED (REF: F48T)

The 48" frame must be purchased in order to use this system. The frame consists of the two transport and depth control wheels which are adjusted by winding up or down jacklegs. The wheels are pneumatic wide profile with bearings (not bushed). The frame has a weight tray and is supplied with three 25 litre ballast tanks. The towed carrier frame has an adjustable tow bar.

A 50mm ball hitch can be fitted in place of the standard clevis hitch. A draw bar pin is supplied with each frame.



## MOUNTED (REF: F48M)

The mounted frame will fit compact tractors fitted with category 1 three point linkage fittings; other fittings configurations can be supplied.

The frame is designed that a tow bar can be fitted if required, making the frame easily converted for towing.

<b>Overall width</b>	1750mm (69")
<b>Un-ballasted weight</b>	from 60kg.
<b>Ballasted weight</b>	135kg.

All the following are suitable for either the towed or mounted frame.



## HOLLOW TINE CORER ATTACHMENT

(REF: HT48)

The hollow tine corer attachment the HT48, like the other attachments, fits easily into the carrier frame. The hollow, specially shaped tines plunge into the grass and remove a 'plug' of soil and turf, when the tine goes into the turf next time round it pushes out the previous core. The hollow tine corer leaves a neat round hole to allow top dressing and/or fertiliser to easily reach the roots where they are most needed.

<b>Working width</b>	1220mm (48")
<b>Maximum core depth</b>	75mm (3")



# 1220mm (48") Grass Care System

## SLITTER ATTACHMENT FOR 48" FRAME

(REF: S48)

The carrier frame fitted with the slitter attachment is an ideal tool to improve drainage and stimulate root growth to grassed areas, especially in late Spring and wet Summers. Well drained grassed areas will help towards the prevention of moss. The three 25 litre ballast containers supplied with the carrier frame, when full, will provide additional weight to drive the slitter blades into the ground.

**Working width** 1220mm (48")  
**Weight ballasted with water** 150kg.



## AERATOR ATTACHMENT FOR 48" FRAME

(REF: A48)

The carrier frame fitted with the aerator attachment is an ideal tool for Autumn use breaking down the surface pan of grassed areas, improving drainage and allowing air penetration to the roots. The three 25 litre tanks, when filled with water, provide additional weight to help penetrate hard surfaces.

**Working width** 1220mm (48")  
**Weight ballasted with water** 150kg.



## DETHATCHER ATTACHMENT FOR 48" FRAME

(REF: D48)

The carrier frame fitted with the 48" dethatcher, comprises of four rows of staggered shock coiled tines which will tease out heavily matted grass and encourage tillering during the growing season. The D48 can also be used to "freshen up" gravel drives, paths and horse arenas. When full the three 25 litre ballast containers supplied with the carrier frame, it can be used for extra weight if required.

**Working width** 1220mm (48")  
**Ballasted weight** 167kg.



*Depth control is variable by adjustment of the transport wheels*

System Continued ...



# Grass Care System 1220mm (48")



## ARENA MAINTENANCE ATTACHMENT FOR 48" FRAME (REF: AM48)

This attachment has been designed to rejuvenate and level most types of surfaces. The unit consists of one row of spring tines, which tease through the surface to break up the top surface pan. The following level bars level the surface. The wheels can be trailed on the surface to reduce drag and allow for light/faster finishing to surface.

**Working width** 1220mm (48")



## ROLLER ATTACHMENT FOR 48" FRAME (REF: R48)

The carrier frame fitted with the roller attachment is an ideal tool to "firm up" grassed areas in the Spring before the heavy growth period.

**Working width** 1150mm (46")  
**Diameter** 360mm (14")  
**Weight ballasted with water** 150kg.



## SORREL ROLLER ATTACHMENT FOR 48" FRAME (REF: SR48)

The sorrel roller attachment is ideal to break up crust that forms on compacted soil. The spikes penetrate the surface which allows the air, nutrients and especially water to start their journey into the roots.

**Working width** 1220mm (48")  
**Roller diameter (without tines)** 200mm (8")  
**Tine penetration** 63mm (2 1/2")  
**Number of tines** 224  
**Weight** 32kg.



# 1220mm (48") Grass Care System

## BRUSH ATTACHMENT FOR 48" FRAME

(REF: B48)

The brush attachment consists of 2 rows of brushes per unit attached to a strong metal framework. The brush will brush into lawns top dressing and lawn sand. It will put those much-admired stripes into the lawn. It can also be used on artificial playing surfaces.

**Working width** 1220mm (48")



## LEVELLING LUTE FOR 48" FRAME

(REF: L48)

The lute is a useful tool for levelling soil areas prior to seeding. The lute will level and freshen up sand manèges leaving a smooth level surface. The lute may also be used on gravel drives, or to level out mole hills on the lawn.

**Working width** 1220mm (48")  
**Weight ballasted with water** 150kg.



## POWER SPRAYER ATTACHMENT FOR 48" FRAME (REF: SP48)

The sprayer attaches to the weight tray of the carrier frame. A 12-volt diaphragm pump, powered from the towing tractor, pumps the herbicide fertilisers etc. to a four nozzle spray boom. A hand lance is supplied as standard with the unit for spot spraying.

**Tank capacity** 70 litres (15gals)  
**Spraying width** 1900mm (75")  
**Pump delivery** 6.8 l/min (max)





# P3 Turf Care System 1500mm (60")



## P3 MOUNTED CARRIER FRAME (REF: P3F)

The P3 carrier frame is attached to the tractor by the three point linkage system. The frame has a built in weight tray in order that top weight may be added to achieve the penetration required of the fitted attachment.

Category I mounting is supplied as standard, other categories are available if required.



## AERATOR ATTACHMENT FOR P3 SYSTEM (REF: P3A)

The spikes drive into the ground giving up to 125mm (5") penetration with added weight in the correct conditions. The opening up of the surface relieves compaction, improves drainage and allows air and feed to reach the root formations quickly.

**Working width** 1500mm (60")  
**Ballasted weight** 276kg



## SLITTER ATTACHMENT FOR P3 SYSTEM (REF: P3S)

The slitter is an ideal tool to improve drainage and stimulate root growth to grassed areas, especially in late Spring and wet Summers.

Well drained grassed areas will help towards the prevention of moss. Up to 125mm (5") of slit depth can be achieved with added weight in the correct conditions.

**Working width** 1500mm (60")  
**Ballasted weight** 276kg



## BRUSH ATTACHMENT FOR P3 SYSTEM (REF: P3B)

The brush attachment consists of two rows of stiff, closely woven bristles. The bristle pressure on the ground can be altered by adjusting the two depth wheels on the carrier frame. The brush attachment is ideal for brushing in top dressing, dispersal of casts and if required removal of dew. The brush is also useful on artificial surfaces.

**Working width** 1500mm (60")



# 1500mm (60") P3 Turf Care System

## LEVELLING LUTE ATTACHMENT FOR P3 SYSTEM (REF: P3L)

The levelling lute is an extremely useful attachment to the 'P3' system for levelling out new seed beds and for the even distribution of top dressings.

The lute can also be used on gravel drives, or to level out mole hills on grassed areas.

<b>Working width</b>	1500mm (60")
<b>Ballasted weight</b>	280kg
<b>Weight</b>	40kg



## DETHATCHING RAKE ATTACHMENT FOR P3 SYSTEM (REF: P3DTC)

Consists of four rows of spring tines. These tines will delve into matted grass areas quickly and efficiently tease out the thatch. The rake can also be a very useful tool in helping to keep certain manège surfaces in good order and "freshen" gravel drives. The depth wheels fitted to the carrier frame allow adjustment to the "tine pressure" on the surface being scarified.

<b>Working width</b>	1500mm (60")
----------------------	--------------



## ROLLER ATTACHMENT FOR P3 SYSTEM (REF: P3R)

The roller fixes to the underside of the carrier frame. Ballast can be added up to the limit of your three point linkage lifting capacity.

<b>Working width</b>	1500mm (60")
<b>Diameter</b>	360mm (14")
<b>Ballasted weight</b>	270kg



## SORREL ROLLER ATTACHMENT FOR P3 SYSTEM (REF: P3SR)

The Sorrel roller attachment is ideal to break up crust that forms on compacted soil. The spikes penetrate the surface which allows the air, nutrients and especially water to start their journey into the roots.

<b>Working width</b>	1500mm (60")
<b>Roller diameter (without tines)</b>	200mm (8")
<b>Tine penetration</b>	63mm (2 1/2")
<b>Roller weight</b>	32kg.



## HOLLOWTINE CORER ATTACHMENT FOR P3 SYSTEM (REF: P3HTC)

For use in the Autumn and Spring, when turf conditions are right, soft and penetratable.

The hollow tines will dig into the turf at the same time removing a 'plug' of soil. The 75mm (3") deep holes will receive top dressings, sand etc and take them directly to the roots of the grass.

<b>Working width</b>	1500mm (60")
<b>Ballasted weight</b>	270kg





# D Turf Care System 1500mm (60")



## MOUNTED FRAME FOR D SYSTEM

This frame must be purchased in order to use the system.

Ideal for use on paddocks, golf courses, football pitches, race tracks etc. This system gives the advantages of all the benefits of aeration and slitting, allowing air into roots, to assist drainage, and slow down the build up of thatch.

**(REF: DMF)**

The frame has a category I three point linkage tractor mounted as standard, other categories can be supplied. A weight tray is incorporated in the design which gives a facility to add top weight to gain required penetration. This tray is also extremely useful for transportation of tools etc. For safety purposes a rear mesh guard cover is fitted. The floating roller will push back any plucked divots without closing the penetrations. An adjustable scraper bar is fitted to the rear of the roller.

**Overall width** 1780mm (70")

**Weight** 170kg

**Maximum ballast to be added to weight tray**  
**250kg (550lbs)**



## HOLLOW TINE CORER

**(REF: DHTC)**

This hollow tine corer bolts onto the carrying frame in the same way as the aerator or slitter. The revolving discs fitted with hollow spoon tines delve into the turf surface to remove, on average a 75mm (3") core.

Removing cores from turfed areas allows air and water to have direct access to the root system; if lawn sand is applied the core holes will fill with sand to give the maximum advantage to the root system.

The rear roller is lifted out of work for this operation.

**Working width** 1500mm (60")

**Main shaft bearings** 50mm

**Maximum core depth** 75mm (3")



## NEW

## DETHATCHING RAKE

**(REF: DDTC)**

The dethatcher attachment fits onto the rear of the multi tool frame. The two rows of heavy duty spring tines draw through the surface to remove all unwanted thatch and dead grass to promote new and healthy growth.

**Working width** 1500mm (60")



# D Turf Care System 1500mm (60")

## MOUNTED DEEP AERATOR

(REF: DAM)

Nine heavy duty aeration discs on 50mm steel axle c/w bearings easily bolts onto the carrying frame. The discs will penetrate up to 180mm (7") in suitable conditions.

<b>Working width</b>	1500mm (60")
<b>Main shaft bearings</b>	50mm
<b>Maximum depth</b>	180mm (7")



## DEEP MOUNTED SLITTER

(REF: DSM)

Nine heavy duty slitter 'stars' on a 50mm steel axles c/w bearing easily bolts to the carrying frame. Up to 125mm (5") can be achieved in suitable conditions; extra weight may be added if required.

<b>Working width</b>	1500mm (60")
<b>Main shaft bearings</b>	50mm
<b>Maximum depth</b>	125mm (5")



## DEEP MOUNTED SLITTER WITH REPLACEABLE TINES

(REF: DSM2)

The fine turf slitter (Ref DSM2) is equipped with slender hardened blades with knife edges. This gives a clean penetration into soil leaving the surface free from any turf tearing or plucking.

The blades, when requiring replacement can have new ones bolted on.

Depending on soil conditions a penetration of up to 150mm (6") can be achieved.

<b>Working width</b>	1500mm (60")
<b>Number of discs</b>	9
<b>Blades per disc</b>	5





## COMBINATION TURF GROOMER

(REF: 4GCS)

The three point linkage mounted combination turf groomer is a multi tasking unit to groom pitches etc. prior to use or at the finish of play. The leading star shaped slitter bar pierces the surface to increase drainage. The brush and rake bars tickle over the surface to enhance the quality and appearance of the area. The rear roller firms up the surface and gives that much sought after striping.

All three tools can be adjusted by individual screw jacks for depth and pressure.

A weight tray is incorporated in the design to allow top weight to be added if required. This tray also acts as a useful general purpose carrier.

### Specification

**Working width** 1500mm (60")

**Overall width** 1700mm (68")

Other attachments can be fitted to this unit if required.







The SCH sorrel rollers are supplied in three working widths.

(REF: SSR12) 305mm (12")

(REF: SSR24) 601mm (24")

(REF: SSR36) 915mm (36")

The rollers are ideal for use on fine turf surfaces, cricket squares, tennis courts, bowls green etc. The rollers with limited penetration multi toothed drums will penetrate the surface to alleviate the surface compaction. This allows air and nutrients to start their journey to the root system, when flood watering is carried out the multi holes disperse the water to the roots extremely quickly.

A smaller roller is incorporated in each unit to iron out any small bumps. The roller also makes for easy transport of the unit from shed to pitch.

Spikes can be replaced when worn.

#### Specification

<b>Working widths</b>	305mm (12") - 601mm (24") - 915mm (36")		
<b>Roller diameter (without tines)</b>	200mm (8")		
<b>Height</b>	1244 (49")		
<b>Tine penetration</b>	63mm (2 1/2")		
<b>No of tines per 12" drum</b>	56		
<b>Weights</b>	<b>12"</b>	<b>24"</b>	<b>36"</b>
	48kg	96kg	144kg



## MOUNTED SORREL ROLLER

(REF: 3SSR36)

The three point linkage mounted sorrel is especially useful on large areas where a tractor has access. The rear roller adds penetration weight to the system. If the rear roller is required a manual handle must be fitted. A handle is supplied with each machine.

The frame has category 1 mounting as standard, category 2 is available on request.

<b>Working width</b>	915mm (36")
<b>Roller diameter (without tines)</b>	200mm (8")
<b>Tine penetration</b>	63mm (2 1/2")
<b>No of tines</b>	168
<b>Weight</b>	168kg



**Manual handle**  
supplied as standard

Spikes can be replaced when worn

Sorrel Roller attachments are included in our lawn care systems on pages 32 & 35

**1220mm (48")  
System**  
(REF: SR48)



**P3 Turf Care  
System**  
(REF: P3SR)







## THE STAND ALONE BUDGET ROLLER (REF: SAGR)

This small metal roller is very useful in areas where a larger roller can not be worked. It can be used behind low horse power tractors (10Hp), or by hand with the optional hand conversion kit. To gain added weight the roller may be filled with water. This greatly increases its weight and therefore its rolling performance.

<b>Working width</b>	915mm (36")
<b>Diameter</b>	360mm (14")
<b>Weight unballasted</b>	32kg (71lbs)
<b>Weight ballasted</b>	116kg (256lbs)

### Optional Extras

Hand conversion (HCGR)  
50mm ball hitch



## HEAVY ROLLER 1060mm (42") (REF: HGR)

The large diameter roller is shaft mounted onto the frame with 25mm bearings. A scraper blade is fitted to the mounting frame to prevent a build up of earth etc. on the roller face. The roller may be water ballasted for extra weight. There are two filling/emptying points situated at each end of the roller to make the filling and emptying task a simple operation.

<b>Working width</b>	1060mm (42")
<b>Diameter</b>	450mm (18")
<b>Weight unballasted</b>	35kg (70lbs) approx
<b>Weight ballasted</b>	222kg (490lbs) approx

**Optional Extra**  
50mm ball hitch



## LARGE ROLLER 1800mm (72") (REF: 6HGR)

The 6HGR has a diameter of 18" (450mm) with a working width of 72" (1800mm). The roller is mounted on ball bearings. A mud scraper bar is fitted. The roller, for added weight, can be ballasted with water or sand.

<b>Working width</b>	1800mm (72")
<b>Weight unballasted</b>	82kg (183lbs) approx
<b>Weight ballasted</b>	355kg (783lbs) approx

**Optional Extra**  
50mm ball hitch



## TRAILED SWEEPER

(REF: TS98)

The TS98 Lawn Sweeper is robust in construction to withstand prolonged heavy use. A differential mechanism on the brushes allows the sweeper to be manoeuvred in tight corners without the wheels "scuffing". The differential mechanism also allows both ground wheels to drive the pick up brushes giving it superior sweeping power. The height adjustment is simple. The main drive is transmitted via metal gears. The large capacity solid plastic catcher is rot and tear proof and simple to use. Reversing into the tipping heap is always difficult but it is made easier with the TS98 as it only has two wheels in contact with the ground. A useful collection sheet is supplied with each machine.

### Hard surface sweeping

The sweeper may be used for hard surface sweeping. To achieve the best results a rubber front strip should be fitted at our factory at time of manufacture.

<b>Overall width</b>	1300mm (51")
<b>Working width</b>	915mm (36")
<b>Length with tow bar</b>	1700mm (67")
<b>Weight</b>	78kg (171lbs)
<b>Catcher capacity</b>	270 litres
<b>Weight</b>	70kg

### Optional Extra

50mm ball hitch



The heavy duty brushes



Strong metal gears

DVD ON REQUEST

For powered collector see page 59



# Sweepers & Collectors

## PROFESSIONAL LEAF SUCTION UNIT (REF: PSU)

This large leaf suction unit is hungry to clear up large areas of fallen leaves. The PSU fan unit with its powerful 9Hp Honda engine is mounted on a two wheel chassis with an integral towbar. The favourite way of using the unit is to attach it to the rear of the leaf collecting trailer. This trailer can be supplied with the trailer adaption kit. Modify your own trailer or SCH will collect and modify your trailer. The discharge hose is attached to the rear of the trailer. The unit then is able to suck up fallen leaves efficiently. A combined team of the suction hose operator and a person driving the tractor can clear along drives and road edges at very impressive speeds. The leaves passing through the fan are chopped up greatly increasing the capacity of the trailer, meaning less empties per day. Many operators use it in conjunction with a hand held blower. Blow out leaves from flower beds and awkward areas and then collect them with the suction unit. The fan is belt driven and not fitted directly onto the crankshaft of the engine.



### Specification

<b>Width</b>	1320mm (52.5")
<b>Length</b>	1500mm (60")
<b>Weight</b>	105kg
<b>Engine</b>	9Hp Honda Petrol
<b>Suction hose length</b>	3 meters
<b>Discharge hose length</b>	1000mm (39")
<b>Hose diameter</b>	200mm (8")
<b>Weight</b>	180kg

## ROAD LEGAL TOWED VERSION (REF: PSUFT)

This version is supplied on a two wheel chassis having suspension units and required lighting. The hand held suction nozzle is fitted to 3 metres of 200 mm diameter hose. The discharge is via a metal tube with a swivel base to allow the direction to be altered. The discharge head is also adjustable. A jockey wheel and 50mm ball hitch is fitted as standard. The fan is belt driven and not fitted directly onto the crankshaft of the engine.



## TRAILER KIT FOR PROFESSIONAL LEAF SUCTION UNIT (REF: PSUTK)

This basic kit has been fabricated to fit the SCH 15 cwt trailer with extension sided (GWTS15 & GWTX15)

The kit consists of:

- 1 A rear adaptor plate to accept the flexible hose from the leaf collector
- 2 A mesh cover sheet
- 3 Hold down elastic cords
- 4 Screw on hooks for the above
- 5 Towing facilities to tow the leaf collector behind the trailer





## OPTIONAL BUILDS

Illustrated here are a few of the many mountings/adaptations we are able to construct for individual requirements of our leaf collectors. The special builds can incorporate adaptations to you existing trailer or transporter.





# Sweepers & Collectors

## LARGE CAPACITY TRAILED COLLECTOR (REF:TRCL)



The TRCL can be used to collect leaves via the cutter deck or by the optional wandering hose. The TRCL greatly increases the collecting capacity and therefore larger areas are collected in one fill, quicker, time saving and a great cost saving in labour.

The powerful motorised fan unit mounted on the front of the TRCL sucks up the green waste from the cutter deck and propels it into the trailer. The trailer has a low centre of gravity, which makes it extremely stable on hilly ground. Wide profile pneumatic wheels greatly reduce wheel markings on soft ground. The TRCL can also be used on level tarmac and gravel surfaces.



Optional wander hose kit

### Dimensions

#### Cage size

<b>Width</b>	890mm (35")	<b>Blower diameter</b>	530mm (21")
<b>Height</b>	1120mm (44")	<b>Engine size</b>	Honda 5.5Hp
<b>Length</b>	1580mm (62")	<b>Suction/delivery hose</b>	200mm (8") Diameter
<b>Overall length</b>	3050mm (120")	<b>Weight</b>	162kg



LB

## LEAF BLOWER (REF:LB)

The towed leaf blower moves leaves in bulk leaving them ready for collection. The blower, in effect, replaces a manual rake. The blower also makes a simple task of moving leaves from flower beds, edges of drives, pathways etc. When the handle is fitted the leaf blower becomes an extremely useful leaf manager in areas where it is too restricted to operate a tractor.

### Option - Hand conversion for leaf blower (Ref: LBHC)

This attachment converts the towed leaf blower into a manually manoeuvrable unit.



LBHC

### Specification

<b>Engine</b>	9Hp Honda Petrol Engine, manual start
<b>Wheel</b>	Pneumatic, c/w bearings, 15/600/6
<b>Fan diameter</b>	600mm (24")
<b>Width</b>	750mm (30")
<b>Length</b>	1000mm (40")



# Broadcasters & Spreaders

## BUDGET DROP SPREADER (REF: DS42)

The low cost drop spreader is designed to work behind garden tractors. It will spread most types of granular fertiliser which have a constant size prill evenly and accurately. The bottom slide adjuster plate is easily set to accommodate different prill sizes and application rates. Driven by the large heavy-duty wheels is a revolving serrated agitator to prevent any inconsistency in the flow of fertiliser. The hopper being moulded in heavy gauge plastic and the calibration bars in stainless steel makes deep cleaning after use a simple and effective task.



### Specification

<b>Hopper capacity</b>	78kg
<b>Controlled spread width</b>	1060mm (42")
<b>Overall width</b>	1300mm (52")
<b>Dry weight</b>	20kg (44lbs)
<b>Wheel dimension</b>	368mm (15")
<b>Weight</b>	23kg



### Optional Extra

Hand conversion for DS42 (Ref: HTDS). By attaching the hand conversion the spreader can be used as a push spreader, ideal in areas where a tractor is not accessible or detrimental to grassed surface.

## PEDESTRIAN DISC SPREADER (REF: SSS2)

This popular broadcaster/ spreader has a generous 60 kg hopper size. The pneumatic wheels allow the unit to be easily pushed over the surface. An adjustable feed control makes it very suitable for the spreading of seed, fertiliser and salt. A shower proof cover is supplied with this product. When used with salt the spreader helps to keep work areas safe in adverse weather.

**Only free flowing bagged salt should be used.**

### Specification

<b>Hopper capacity</b>	60kg
<b>Overall width</b>	820mm (32")
<b>Maximum spread width</b>	3-3½ meters
<b>Weight</b>	9kg



## LARGE MANUAL SALT SPREADER (REF: SSLA)

This manual propelled salt and sand spreader has been added to our popular range of spreaders for use on larger areas which require salt to be used. An integral agitator allows the salt to run onto the disc applicator giving an even spread. A spread skirt is fitted to control the width of spread on paths etc. The skirt can be removed where large areas are required to be treated. This spreader may also be used for prill fertilisers and grass seeds. We recommend salt to BS 3247-1991 to be used.

### Specification

<b>Hopper capacity</b>	50 litres
<b>Spread width</b>	1-3 metres
<b>Wheels</b>	Pneumatic



## LIQUID SALINE SALT SPRAYER (REF: LSSA)

SCH have developed a sprayer to apply liquid salt melting products (Eurea), Applying de-icing chemicals in a liquid form has many advantages over the traditional solid salt products:-

- The de-icing time is lowered, kinder to metal e.g. cars, trolleys etc.
- Is kinder to the environment.
- Liquid products are easier to store.
- Less expensive, liquid can be up to 50% cheaper than salt & sand.

The model illustrated has a capacity of 270 litres, a petrol powered pump with a wide spray boom incorporating two large nozzles. The unit is skid mounted for use on almost any truck or trailer.

### Specification

<b>Pallet size length</b>	2030mm (80")	<b>width</b>	915mm (36")
<b>Spray width</b>	up to 3300mm (130")		

**Other units can be produced with different tank sizes to suit your individual requirements**





# Broadcasters & Spreaders



## FERTILISER BROADCASTERS

(REF:TBS50) 50 LITRE CAPACITY (TOWED)

(REF:TBS100) 100 LITRE CAPACITY (TOWED)

The broadcaster spreaders have wide profile wheels for superior grip to drive the all metal gearbox, which in turn drives the spreading disc. The spreaders may be used, when fitted with the guard (Ref: BSG), to spread dry salt, sand and grass seed. The spread width (2-6 metres) is determined by the forward speed of your towing vehicle (max 10mph). An adjuster lever is set to meter the correct amount of product to be broadcast.



Manual Handle (REF: HBS)

### Specification

	TBS 50	TBS 100
<b>Capacity</b>	50 ltrs	100 ltrs
<b>Spreading width</b>	2-6m	2-6m
<b>Height</b>	860mm	1030mm
<b>Hopper Diameter</b>	810mm	810mm
<b>Weight</b>	37kg	43kg
<b>Overall width</b>	810mm	810mm

We recommend salt to BS3247-1991 to be used.



# Broadcasters & Spreaders

## MOBILE BROADCASTER

(REF:TBS300)

This large capacity broadcaster/ spreader with robust plastic hopper. The machine is mounted on two pneumatic wheels. It is especially useful for spreading road salt in large areas. A heavy duty sieve is fixed into the hopper and a powerful agitator keeps the salt flowing.

A guard is fitted round the spreading rotor to restrict the radius of spread.

The drive mechanism can be disengaged to allow the unit to be towed to the spreading area. A ball or towing clevis can be fitted as required.

### Specification

<b>Hopper capacity</b>	250 ltrs max. (880 lbs)
<b>Maximum load</b>	400kg
<b>Spread width (no guard)</b>	6 - 18 mtrs
<b>Overall width</b>	1500mm (60")
<b>Weight</b>	129kg unladen (285 lbs)

We recommend salt to BS3247-1991 to be used.



## POWERED FERTILISER BROADCASTER (REF: PBS250) 3 point linkage



This shows the unit fitted with an optional deflector guard

The broadcaster is fully mounted on a category I three point linkage with a capacity of 200+ litres. The broadcaster is capable of full width spreading or may be used with right or left shut off. The conical shaped hopper allows the material to free flow onto the spinning disc. A fixed agitator is incorporated. P.T.O. shaft is supplied with the unit.

The P.T.O. speed being 540 rpm.

### Specification

	<b>PB S250</b>
<b>Capacity</b>	250 ltrs
<b>Maximum load</b>	550kg
<b>Spreading width</b>	6-18m
<b>Height</b>	1070mm
<b>Hopper Diameter</b>	1050mm
<b>Weight</b>	55kg
<b>Overall width</b>	1000mm

### Optional Extra

Articulated agitator

A deflector guard may be fitted to restrict sand and salt distribution at extra cost.



We recommend salt to BS3247-1991 to be used.



# Flail Mowers 1070mm (42")



## FLAIL MOWER (REF: FM 42)

A powerful, strong, towed, long grass cutter, with a working width 1070mm (42").

This unit is ideal for maintaining rough grassed areas, pasture land, woodland rides and walks.

A one piece roller mounted at the rear of the cutter alleviates scalping.

The throttle control and safety engine emergency stop switch can be easily reached from the tractor seat.

The tow bar has two operating positions, in the centre of the machine and to one side where it is beneficial not to run on the standing growth before cutting.

The 42 cutting flails are driven by two 'V' belts powered by a 9Hp Honda engine with electric start.

### Specification

- 9Hp Honda Petrol engine with electric start and manual start
- 12 volt heavy duty battery
- Working width: 1070mm (42")
- Overall width: 1250mm (49")
- Cutting height: minimum 18mm (3/4")
- Length including drawbar: 1500mm (59")
- 42 cutting flails
- Weight approximately 125kilos
- Transport wheels fitted as standard
- Adjustable clevis hitch as standard
- **Optional 50mm ball hitch**



**DVD ON REQUEST**



# Flail Mowers 1220mm (48")



## HEAVY DUTY FLAIL MOWER

(REF: FM48)

The FM48 is powered by a 13Hp Honda petrol engine c/w electric start. The flails are free floating on a chain link to the rota shaft.

The tow bar has two operating positions, in the centre of the machine and to one side where it is beneficial not to run on the standing growth before cutting.

The throttle control and safety engine emergency stop switch can be easily reached from the tractor seat.

The transport wheels are situated at the side of the machine.

The safety of the operator is very much in mind when designing this type of machine. Guards are provided to stop the operators' feet accidentally being offered to the flails.

Suitable for towing behind 18Hp plus tractors, ATVs and quads.

The one piece rear roller prevents scalping.

50mm ball hitch fitted as standard.

### Optional

Transport wheels fitted at the rear.

### Specification

13Hp Honda petrol engine with electric start with and manual start. **Optional Diesel power unit.**

<b>Wheels</b>	Wide profile 15/600x6
<b>Working width</b>	1220mm (48")
<b>Overall width</b>	1900mm (74")
<b>Cutting height</b>	Minimum 18mm (3/4")
<b>No. of cutting flails</b>	51
<b>Weight approximately</b>	245kg





# Artificial Surface - Sweepers



## HARD SURFACE TOWED SWEEPER

(REF: HSTS98)

This sweeper benefits from a sprung floor, to allow the sand to flow back through the base of the hopper, at the same time collecting debris such as leaves and twigs.

A differential mechanism on the brushes allows the sweeper to be manoeuvred in tight corners without the wheels scuffing; height adjustment is simple. Both wheels drive the pick up brushes giving excellent sweeping power. The main drive is transmitted via metal gears.

A cover plate is supplied with each machine to cover the mesh floor in sweeping operations where all debris is required to be collected.

### Specification

<b>Overall width</b>	1350mm (51")
<b>Working width</b>	915mm (36")
<b>Weight</b>	78kg (171lbs)
<b>Catcher capacity</b>	270 litres
<b>Weight</b>	70kg



Cover plate in position

Catcher box relates to both sweepers



Mesh floor



## HARD SURFACE POWERED SWEEPER

(REF: HSPS)

The powered brush sweeper is designed for sports surface where a more aggressive sweep is required i.e. hard surface running tracks etc.

The HSPS can also be used on sand filled surfaces. The sand / fill are returned to the playing surface through the mesh bottom of the catcher box.

A cover plate is supplied with each machine to cover the mesh floor in sweeping operations where all debris is required to be collected.

The brush is powered by a 5.5Hp Honda petrol engine with built in centrifugal clutch – Reduce the engine revolutions and the brush stops revolving.

The required brush pressure on the surface is achieved by means of the height adjuster mechanism.

A winch to ease the emptying may be fitted as an optional extra.

### Specification

<b>Engine</b>	5.5HP Honda petrol with reduction box with centrifugal clutch
<b>Overall width</b>	1350mm (51")
<b>Working width</b>	900mm (35.5")
<b>Catcher capacity</b>	270 litres
<b>Weight</b>	190kg



# Artificial Surface - Groomers

## ARTIFICIAL GROOMING RAKE

(REF:ASR2)

The artificial surface grooming rake is a small, basic machine to carry out routine maintenance on artificial playing surfaces with a sand base. The two rows of staggered spring tines tease through the playing surface to remove the surface compaction and aid drainage.

A weight tray is incorporated in the design in order that top weight may be added to aid penetration on heavily compacted surfaces.

The trailing brush will level and groom the play area; having completed the operation the play area will be in a ready state for many hours of hard use.

Each working row of tines may be lifted out of work individually to suit your grooming requirements i.e. lift out of work the two spring tine rows and leave the brush in work

This simple grooming unit may be towed behind 13Hp tractors and above. The groomer can be lifted out of work for simple and safe transportation to the storage area.

The standard working width is 1200mm (48") other sizes can be supplied.

A clevis hitch is fitted as standard. A 50mm ball hitch can be fitted as an optional extra.

**Weight** 30kg




## MOUNTED GROOMING RAKE

(REF:3ASR2)

The three point linkage mounted rake is designed for grooming of areas of sand filled playing surfaces.

The operation is the same as the unit described for ASR2, above.

Many different working width can be supplied. The illustration is of a unit 1800mm (71") working width.

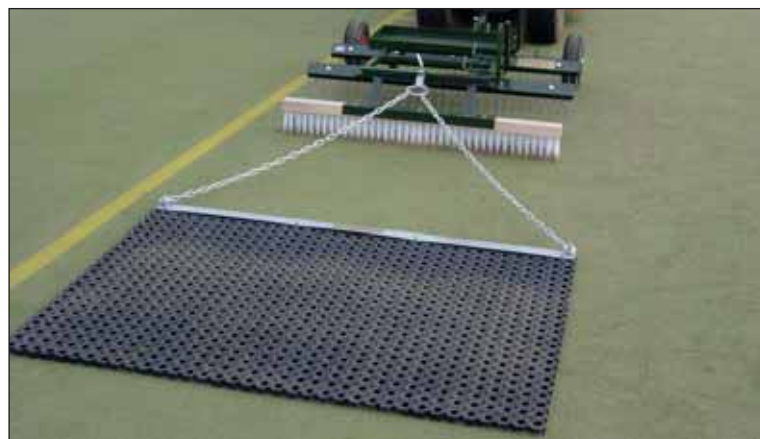

This picture shows the rake with our rubber drag mat (Ref: RDM) being towed behind the unit. The mat will give a final levelling to the top sand and work it into the surface to leave a perfect finish for playing.

**For details see  
page 53**



# Groomers (Artificial Grass)



## DE-COMPACTION RAKE

(REF: DCR - Towed)  
(REF: 3DCR - Mounted)

The DCR rake has been specifically designed to alleviate the compaction on 3rd generation artificial surfaces. The DCR firstly relieves the compaction with a row of spring tines. This action pulls up the matted surfaces and the compacted rubber/sand fill. Two rows of levelling bars re-spread the fill to the surface. Finally a strip brush smartens up the surface. The DCR is mounted on a four wheel chassis. The two front wheels are solid casters to allow for turning in tight corners. The two rear wheels are on jacklegs. All four wheels have adjusting facilities, this means the exact penetration pressure is put on the tines. The rear brush can be removed if required or the unit may be adjusted so the brush only is in contact with the surface. The DCR can be pulled by its towbar or a three point linkage version is available. The two rear wheels can be jacked down to raise the entire unit for transport to the storage area etc.

The DCR incorporates a carrying tray which is useful to carry small tools, collection of litter etc.

Other sizes available on request.

### Specification

<b>Working width</b>	1300mm (52")
<b>Overall width</b>	1740mm (68")

## NEW CHEMICAL APPLICATOR

(REF: DCRCA)

The DCRCA is a chemical applicator fitted to the carrier frame to apply required chemical to long fibre synthetic sports surfaces, of which 3G is the most common at this time. The chemical is applied by dribble/drip bar mounted in front of the row of scarifying tines. The object being to apply the chemical and then the tines will open up the surface to allow the prescribed chemical to reach the required areas. Flow rates can be adjusted to suit the required application rate. Power to the pump is supplied from the towing unit. An independent battery may be fitted if required.

### Specification

<b>Tank capacity</b>	70 litres
<b>Weight</b>	60kg





## TRIANGULAR BRUSH

(REF: TMB)

The brush gives the artificial and natural grass play areas that vital 'scratch' in between major services. The wheels on the upper side of the brush makes it an easy task to transport it to the storage area. Simply turn the brush onto the wheels. Other widths available on request.



### Specification

**Working width** 1500mm (60")

**Weight** 40kg

## RUBBER DRAG MAT

(REF: RDM)

The rubber drag mat, constructed from moulded rubber with a galvanised towing bar is ideal for use on most surfaces, natural or artificial. The rubber matting lessens surface damage that may be caused by heavier metal units. Other widths available on request.

### Specification

**Working width** 1500mm (59")

**Weight** 30kg





# Artificial Surfaces - Groomers

## ARTIFICIAL SURFACE POWER BRUSH

(REF:ASPB)

The artificial surface power brush is a compact walk-behind sweeper suitable for year round use. Highly manoeuvrable, the sweeper provides quick effective cleaning wherever it's needed. The brush carrier can be angled to the left or right to sweep debris off to the side. The brush unit is ideal for cleaning snow from walkways or areas where large machines cannot be used. The brush speed and quantity of nylon threads makes this machine ideal for artificial and hard surface play areas such as tennis courts.

The brush is supplied complete with a collection box.

On surfaces where the fill is required to be returned to the area a mesh bottom can be fitted into the box. This must be requested at the time of order, and will attract a small additional cost. (Box conversion Ref: BASPB)

### Specification

<b>Engine</b>	Briggs & Stratton, 212cc
<b>Transmission</b>	1 forward, 1 reverse
<b>Sweeping width</b>	70cm (27.5")
<b>Brush diameter</b>	35mm (1.4")
<b>Wheel size</b>	4.10 x 4
<b>Starter</b>	Recoil
<b>Weight</b>	68kg





# Surface Groomers & Brush Gallery



Call Us: 01473 328272 Email: [sales@schsupplies.co.uk](mailto:sales@schsupplies.co.uk)

Product Search

Search...

To access information of these brush units, simply note the reference of the product you wish to look at, go to our website at [www.schsupplies.co.uk](http://www.schsupplies.co.uk), search for the product code (bottom right hand corner).

You will be able to see brief details of your chosen product.

If this is not quite what you had in mind please contact us.



BG01



BG02



BG03



BG04



BG05



BG06



BG07





# Artificial Surface Maintenance Package

## ARTIFICIAL SURFACE MAINTENANCE PACKAGE (REF:TPG)



**Tractor**

The tractor package gives the user a dedicated artificial surface maintenance system and a tractor without the need of continually removing implements etc. This means the pitch will get its required routine maintenance or give the surface a 'spruce up' before playing a match.



**System Frame**



**Scarifying Brush**

The maintenance system consists of the following:

- System Tractor
- System mounting frame
- A scarifying brush
- A levelling lute
- A scarifying rake
- A weight tray to add downward pressure if required



**Lute**



**Scarifying Rake**

The towing tractor is a Countax or Westwood, which can be your choice between a new unit or an AI pre owned unit. The rear lift is incorporated design of the system to allow the tools to be lifted out of work when required.



**Lift Handle and Water Try**

The following are a useful addition when considering the purchase of a package unit.

- Drag mat ref: RDM (page 53)
- Decompaction rake for deep periodic grooming Ref DCR (page 52)
- 70 litre capacity power sprayer c/w boom and hand lance (Ref:TPGS)

The tractor package can also be used on natural grass surfaces

## Optional Additions



**Rubber Drag Mat**



**Triangle Brush**



**Deep Grooming Unit**



**Sprayer**



# Artificial Surfaces - Tractor Packages

**NEW**

## SCH PUNCHTRACTOR

(REF: PUNCH)

The SCH PUNCH tractor has been introduced to compliment the range of dedicated grooming machines to give users a pulling tractor which is available at all times without the hassle of requesting or locating a tractor to use on the specialist playing surfaces.

The hydrostatic transmission allows the operator to manoeuvre in tight work areas.

### Specification

<b>Engine</b>	Briggs & Stratton 17.5Hp. Petrol
<b>Transmission</b>	Hydrostatic
<b>Wheels</b>	Front - 15 x 6 6 Rear - 18 x 9.5 x 8
<b>Turning radius</b>	18 inches
<b>Dimensions</b>	Width - 915mm (36") Length - 1780mm (70")
<b>Towing facility</b>	Drop pin



With 70 litre sprayer



With rubber drag mat

**NEW**

## RIDE ON GROOMING RAKE

(REF: RGB)

This dedicated grooming brush performs two functions:-

The stiff brush teases into the matting, raising the surface to keep the pores open to encourage the drainage and allow air into the depth of the mat to help prevent algae build up. The two rows of brushes have a cross bar system which adjusts the flex of the bristles.

The brush can be lifted out of work for turning & transport easily from the drivers' position.

The close woven brush interchanges with the scaribrush to give the surface normal everyday grooming.

### Specification

<b>Power unit</b>	Briggs & Stratton 15Hp. Petrol
<b>Transmission</b>	Manual with forward and reverse gears





## TRAILER BARROW (REF: PTPTB)

The trailer /barrow is styled on our popular plastic bodied trailer on page 13, with a strong moulded rot proof plastic body. The barrow handles are incorporated in the chassis, with an additional tow bar to allow the barrow to be towed when required.



### Specification

<b>Body width</b>	830mm (32")
<b>Body length</b>	1350mm (53")
<b>Body depth</b>	400mm (16")
<b>Carrying capacity</b>	500kg (10cwt)
<b>Wheel size</b>	15/600 x 6 with bearings
<b>Weight</b>	38kg



## LARGE CAPACITY PLASTIC BODY TRAILER (REF: LCPTP)

The large plastic trailer fills a gap in our comprehensive trailer range where a bulk, rot proof, transporter is required. The wide profile wheels, on four stud roller bearing hubs, fitted as standard, gives the trailer stability over rough or wet ground. The chassis is built of strong steel giving the plastic body the necessary support. A metal buffer is fitted around the top roll of the trailer. The trailer tipping device is simple to operate. An extendable tipping handle makes the tipping operation an easy task. The towing hitch is a 50mm ball coupling. Other hitches available on request.

### Specification

<b>Body width</b>	1000mm (39")
<b>Body length</b>	1600mm (63")
<b>Body height</b>	500mm (20")
<b>Overall length</b>	2440mm (96")
<b>Overall width</b>	1550mm (61")
<b>Wheel size</b>	20 x 10-8 (4 stud with ball bearings and steel Hubs)
<b>Capacity</b>	690 litres/500kg





## EMPTYING COULDN'T BE EASIER

## EQUESTRIAN POWERED BRUSH

(REF: EPB)

We have developed the Equestrian Powered Brush (Ref: EPB) for the smaller equestrian centres and private paddock owners. The regular removal of droppings promotes healthy grass and helps reduce dropping related diseases. Four rows of height adjustable brushes rotate at variable speeds to flick the droppings into the rot proof rear collecting box. The brushes are driven by a 5.5Hp Honda engine equipped with a speed reduction gear box which incorporates a centrifugal clutch, this means that when the engine speed is reduced the brushes stop revolving, a necessary feature when moving from heap to heap.

The EPB can also be used for other sweeping tasks e.g. car parks etc. The tow hitch is fitted with a 50mm ball hitch.

### Options

Clevis hitch, tongue hitch

### Specification

<b>Engine</b>	5.5Hp Honda petrol with reduction box with centrifugal clutch
<b>Overall width</b>	1350mm (51")
<b>Working width</b>	900mm (35.5")
<b>Catcher capacity</b>	270 litres
<b>Weight</b>	190kg



Strong adjustable brushes



The Unit doubles up as an excellent general purpose collector



Winch fitted as standard

**DVD ON REQUEST**





With tow bar



Mounted rake

## LARGE AREA MANÈGE RAKE

Two widths available

(REF: LAMM48T)

(REF: LAMM48M)

(REF: LAMM72M)

This maintenance machine has been developed to cope with areas which have mainly a rubber surface incorporating sand and flock. To the front a single row of depth adjustable spring tines comb through the surface breaking up the pan. Two leveling bars placed behind the tines level out the surface. To finish off the process a bar roller is fitted to gain the required surface look. A side blade which is detachable, pulls into the area the build up of material driven to the side kick boards. The unit is mounted on two side jack down wheels. The wheels have two main functions, to adjust the working pressures and to transport the unit to a safe storage area. The ball hitch draw bar is adjustable to obtain the correct height with the towing vehicle. Three point linkage units are also manufactured.

### Working widths

Width behind draw bar 1220mm (48")

Three point linkage 1220mm (48")

Three point linkage 1800mm (72")



Side scraper bar



## MANÈGE DAMPENER

(REF: EMD)

When a dusty or dry manège needs to be dampened down SCH can produce a machine to carry out the task. Contact us with your request.

**Tank Capacity** 600 litres (132 gallons)





## MANÈGE MAINTENANCE UNIT

(REF: MMU)

The arena maintenance unit has been developed and manufactured by SCH to rejuvenate areas with a number of different surfaces. The unit is free floating and may be towed by a 4 x 4, ATV or tractor. The front row of adjustable spring tines tedder through the surface alleviating compaction build-up. The two rear bars ride over the surface levelling out the arena.

Fitted with a removable side blade to pull in material deposited on kicking boards.

Other widths can be supplied to order.

**Working width** 1220mm (48")

**Weight** 28kg



## MOUNTED MANÈGE UNIT (REF: 3MMU)

The 3MMU is a three point hydraulic tractor mounted manège unit. The 3MMU is fitted with a removable side mounted dozer attachment to 'pull in' the build up of material which accumulates on the edges. The front row of adjustable depth controlled spring tines tedder through the surface to alleviate any compaction build up.

The standard working width of this useful unit is 1500mm (60").

Other widths can be supplied to order.

**Weight** 40kg



## ARENA MAINTENANCE UNIT (REF:AMU)

The SCH arena maintenance unit (Ref:AMU) will quickly and efficiently level and maintain sand surface manèges. The proper maintenance of the surface area will prolong its life. The unit is of a strong metal construction.

A diagonal cross arm (supplied as standard) clips onto the underside of the frame to "pull in" the build up of material that works its way to the "kickboards".

**Working width** 1220mm (4')

**Weight** 31kg







**10 Tines**

**Specification**

- Overall width** 2000mm (79")
- Wheels** 400 x 8 pneumatic
- Towing hitch** Clevis hitch, a 50mm ball hitch can be fitted as an option

**HAY RAKES (REF:HR10) (REF:HR19)**

Owing to the many requests for a hay rake to remove hay from wild flower meadows we have produced a towed hay collector.

The bunched hay is easily removed by pulling a cord from the tractor seat.

The standard rake is supplied with ten moon shaped tines. (Ref HR10) For sweeping finer cut grass an additional nine tines may be added (Ref HR19).

Please note this is a hay rake, and not a grass sweeper.



**19 Tines**



**HANDY MOVER (REF:NTT)**

The heavy duty general purpose load mover lends its self to many useful tasks round the yard. The unit runs on two pneumatic wheels (15-600 x6) and has a large carrying capacity platform.

The frame is designed so that the weight of the load is evenly distributed.



**BIG BALE TRANSPORTER (REF:BBT)**

This unit will pick up a large bale ready to be transported to the required site. The large low ground pressure wheels will allow the unit to be towed over unfriendly ground.

**Specification**

- Overall width** 200mm (80")
- Overall length (incl. tow bar)** 2400mm (96")
- Unladen weight** 200kg
- Carrying capacity** 1000kg
- Wheels** 20x10-8 4 stud pneumatic
- Lifting jib** Hydraulic manual pump
- Tow hitch** 50mm ball hitch

**Method of operation**

- Remove the trailer floor
- Reverse trailer over the bale
- Lift bale & secure
- Replace floor





## ANIMAL DRINKING CART (REF:ADC)

This very useful addition to the SCH range allows water to be taken, in bulk, to areas where natural or piped water is unavailable. The standard drinking cart has a capacity of 600 litres (132 gallons). A removable water bowl complete with a float valve is fitted to the rear of the cart.

The tank can be removed to leave a useful flat bed trolley. This cart is for off road use only.

Different capacity tanks are available.

A ball hitch may be fitted as an optional extra.



## FAST TOW ANIMAL DRINKING TRAILER (REF: FTADT)

This trailer eases the transport of water to animals which are grazed in areas where water is not available. A 900 litre (200 gallon) baffled tank is mounted on a fully road going legal chassis, brakes, lights, mudguards etc. To the rear of the tank is fitted a drinking bowl complete with a float valve. The bowl is removable when travelling. The tank unit /drinking bowl can be supplied on its own to mount on to your existing trailer (ask for details).

### Specification

<b>Trailer width</b>	1500mm (60")
<b>Trailer length (including bowls and tow bar)</b>	3600mm (142")
<b>Tank capacity</b>	900 litres (200 gallons)
<b>Weight empty</b>	282kg
<b>Weight full</b>	1182kg
<b>Hitch</b>	50mm ball



## ANIMAL DRINKING WATER CARRIER (REF:ADMD)

This 270 litre water carrier has been added to the range to transport a useful quantity of water; mounted on low ground pressure wheels for use over unfriendly ground.

The carrier can be pulled with a medium range ATV or compact tractor.

### Specification

<b>Pump</b>	Petrol 25mm (1")
<b>Tank capacity</b>	270 litres (60 gallons)
<b>Wheels</b>	20 x 10-8 4 stud pneumatic
<b>Overall width</b>	1220mm (48")
<b>Delivery hose</b>	6 metres x 3/4" hose
<b>Unladen weight</b>	119kg
<b>Hitch</b>	50mm ball hitch



## ROUGH TERRAIN WATER CARRIER (REF: GWCRT)

This small water tanker is ideal for towing behind an ATV or similar to transport water to animals in rough terrain areas, water laden bogs etc. The water may be dispensed at speed using a small 12 volt pump powered from the towing vehicle electric supply. The water can also be discharged from a 3/4" tap on the rear of the container.

### Specification

<b>Tank capacity</b>	180 litres (40 gallons)
<b>Wheel size</b>	20 x 10 -8
<b>Pump</b>	12 volt - up to 13 litres per min.
<b>Overall width</b>	1060mm (42")
<b>Hitch</b>	50mm ball





# Chain Harrows



## 3 WAY CHAIN HARROW

(REF: 3WCH5 & 3WCH6)

Three way chain harrows, by design are easier to pull than conventional chain harrows. The major feature of these chain harrows is that they can be pulled in three different ways to suit the desired effect. The tines of the harrow protrude more if pulled in one direction creating an aggressive application. If the towbar is changed to the other end of the chain harrow, the tines protrude less, creating a passive application. The harrow can be turned upside down for levelling purposes.

	<b>3WCH5</b>	<b>3WCH6</b>
<b>Working width</b>	1500mm (60")	1880mm (74")
<b>Length</b>	1500mm (60")	1500mm (60")
<b>Weight</b>	36 Kg	46 kg

All measurements are of the web, not the pulling bar

**The standard ring fits over 50mm ball hitch, optional ball hitch can be fitted**



## MINI CHAIN HARROW (REF: MCH)

This harrow is suitable for work behind tractors of 15Hp and above to remove dead vegetation from lawns, paddocks and large grassed areas. The harrow is suitable for seed bed preparation, both levelling and covering. They are extremely useful for the rejuvenation of horse arenas.

<b>Working width</b>	1220 mm (48")
<b>Length</b>	1650mm (66")
<b>Weight</b>	45kg

All measurements are of the web, not the pulling bar

**The standard ring fits over 50mm ball hitch, optional ball hitch can be fitted**



## 8' CHAIN HARROW (REF: CH8)

A compact tractor of 18Hp and above will pull the harrow. It can be used for pulling thatch and dead grass from paddocks, for levelling and preparation of seed beds and will also assist in the management of horse and pony arenas.

<b>Working width</b>	2440mm (96")
<b>Working length</b>	2290mm (84")
<b>Weight</b>	100kg (220lbs)

All measurements are of the web, not the pulling bar

**The standard ring fits over 50mm ball hitch, optional ball hitch can be fitted**



## MINI CHAIN HARROW MOUNTED ON THREE POINT LINKAGE

(REF: 3MCH)

The standard 1220mm width chain harrow mounted on a frame which incorporates category 1 three point linkage. The main advantages of this form of mounting are ease of transport, simple and easy clearing of debris from the tines, more manoeuvrability on corners and avoids over harrowing on the headlands.

<b>Working width</b>	1220mm (48")
<b>Working length</b>	1178mm (70")

Also available 2440mm (8') working width (Ref: 8MCH)



## SCARIFYING RAKE (REF: SR2)

The scarifying rake is designed to remove dead and matted grass from pasture land, paddocks and rough grassed areas. The rake may also be used for combing through most horse manèges, freshening up large drives and gravelled areas, etc. With the transport wheels removed and by turning the rake upside down it becomes a useful tool for levelling seed beds, mole hills, etc. The rake is transported in the upside down position on the two wide profile wheels supplied with each rake.

### For gravel drive maintenance

The tow bar on the SR2 has been redesigned so that the rake will tow in an angled position. A side blade is fitted to pull gravel in from the side which has been pushed to the edge.

<b>Number of tines</b>	2 rows of 10 tines (staggered)
<b>Working width</b>	1500mm (60")
<b>Overall width</b>	1750mm (70")
<b>Weight</b>	30kg



## THE HEAVY DUTY SCARIFYING RAKE (REF: SR4)

This rake has four rows of heavy duty spring coiled tines which will tease out the thatch and dead grass from paddocks and large grassed areas.

A weight tray on top of the unit allows ballast weight to be added to give extra penetration. Depth control wheels which also act as transport wheels are fitted as standard.

<b>Working width</b>	1500mm (60")
<b>Weight</b>	46kg



## SCARIFYING RAKE MOUNTED ON THREE POINT LINKAGE (REF: 3SR)

The 3SR has four rows of heavy duty spring coiled tines, each row having eleven twin tines. The tines are staggered to give an excellent coverage over the ground. The tines, being spring mounted, "jigger" over the ground pulling and teasing out the dead thatch and matt. The 3SR is mounted on a three point linkage with standard category I link size. Other linkage categories can be supplied.

<b>Working width</b>	1500mm (60")
<b>Length</b>	1530mm (60")
<b>Weight</b>	75kg





# Equestrain & Smallholding

## FOUR WHEEL TURN TABLE TROLLEYS

(REF: FBT1 - FBT2 - FBT3)

The SCH budget range of four wheel turn table trolleys, with a carrying capacity of up to 300 kgs (12 cwt) are ideal for smallholders, builders, stables etc.

The trolleys run on four pneumatic wheels c/w bearings. The design of the handle allows the trolley to be pulled by hand or mechanically towed. 300mm (12") head boards may be added as an optional extra.



### Specification

	FBT1	FBT2	FBT3
Width of body	460mm (18")	760mm (30")	915mm (36")
Length of body	760mm (30")	1230mm (48")	1800mm (72")
Wheel size	400 x 4	400 x 8	400 x 8
Weight	49kg	65kg	71kg



## WILD FLOWER MEADOW SEED COLLECTOR

(REF: WSMC)

This collector has been designed specifically to collect seeds in wild flower meadows. The brushes are powered by a Honda 5.5 petrol manual start. The collector can be offset from the pulling vehicle so that the flowers are not flattened before they are collected.

A screw jack mounted on the front of the unit makes the required collecting height a simple operation. The standard adjustable height is 600mm (24"). Other heights can be accommodated if requested at time of order.

### Specification

Working width	925mm (37")
Overall width	1630mm (64")

### Optional Extra

50mm ball hitch



## HANDY BIN (REF: HAB1)

Large pneumatic wheels make this trailer easy to manoeuvre over rough ground; the removable 39 litre bin with two rope handles this unit is an ideal transporter for numerous outdoor tasks.



## HANDY BIN (REF: HAB2)

With its small wheels and removable trug this handybin is ideal for log carting, shopping etc. Remove the trug and it can be used for many awkward tasks.



## TRANSPORT BOX (REF: PTB)

A strongly constructed transport box with tipping facilities. The tailgate is removable.

**Width** 1220mm (48")  
**Mounting** Category 1 linkage (standard)  
**Weight** 97kg



## DISPLAY TRAILERS

Ideal for enhancing the display and selling of produce at the farm gate. Close the doors in bad weather but allow the goods to be seen through the PVC windows.

Can be towed or manually pulled into position, and we can make just about any size you require, large or small.

Choose from extras such as a bolt down money box, anti-theft anchor facility, decals etc.





# Waterers & Bowzers



## INDOOR WATER UNIT (REF: IDU)

The indoor waterer is a very useful water dispenser for the maintenance of indoor plants etc. The 25 litre tank is mounted on a two wheel trolley which is easily manoeuvred by the handle around corridors etc. The water is dispensed by a small 12 volt pump powered from an integral rechargeable battery. A battery charger is supplied with each unit. A lightweight trigger lance puts the water where it is required. The waterer has a small container for collecting plant groomings. A manual handle makes the transporting of the unit up and down stairs and van loading an easy operation. The water tank can be removed leaving a very useful trolley to transport plant containers.

### Specification

<b>Tank capacity</b>	25 litres (5 gallons)
<b>Overall width</b>	430mm (17")
<b>Overall length</b>	790mm (31")
<b>Height</b>	990mm (39")

## LANCE OPTIONS FOR ALL WATER UNITS

We have three options for our telescopic lances. All lances are fitted with quick fit twist connectors.



	<b>Closed</b>	<b>Extended</b>	<b>Rose formation</b>
<b>Lance A</b>	2100mm (84")	3500 (140")	Rose & straight head
<b>Lance B</b>	1600mm (65")	2500mm (100")	Rose & Straight head
<b>Lance C</b>	1050mm (42")	1750mm 70")	Straight head



## TROLLEY MOUNTED WATERER (REF: HBWP)

<b>Tank capacity</b>	50 Litres
<b>Weight guide</b>	Empty 30 kg / Full 75 kg
<b>Mounting</b>	2 cushioned wheel trolley with 2 guide castors
<b>Dimensions</b>	W 540mm. H 800mm. L 1450mm
<b>Pump</b>	12 volt DC electric pump c/w battery and charger
<b>Flow rate</b>	12 litres per minute
<b>Hose</b>	3.66 metres (12') heavy duty 1/2" hose complete with 'on/off lever tap, quick-fit coupling for simple lance change over
<b>Lances</b>	Telescopic lance complete with rose head for basket watering up to 6 metre reach Ref. C Short lance for tubs and beds
<b>Mounting</b>	2 large pneumatic front wheels (400 x 8), two rear castor wheels. A parking brake incorporated in design. A trash bucket is fitted as standard.



## TROLLEY MOUNTED WATERER (REF: THBW)

<b>Tank capacity</b>	70 litres
<b>Weight guide</b>	Empty 30 kgs / Full 99 kgs
<b>Dimensions</b>	W 600mm. H 800mm. L 1350mm
<b>Pump</b>	12-volt diaphragm pump 18 litres per minute, powered from a re-chargeable battery (charger and battery supplied)
<b>Lance</b>	Telescopic lance complete with rose head 6 metre reach Ref. B Short lance for tubs and beds
<b>Hose</b>	6 metres (20') heavy-duty hose c/w on/off lever tap, quick-fit couplings for simple lance change over
<b>Mounting</b>	2 large pneumatic front wheels (400 x 8), two rear castor wheels. A parking brake incorporated in design. A trash bucket is fitted as standard.



All SCH watering units are supplied with a telescopic lance, a short lance and 6 metres of heavy-duty hose as standard.

## WALK BEHIND PETROL POWERED WATERER (REF:WBPPW)

<b>Tank capacity</b>	70 litres
<b>Weight guide</b>	Empty 78kg. Full 145 kg
<b>Dimensions</b>	W 600mm. H 1000mm. L 1500mm
<b>Pump</b>	12-volt diaphragm pump 18 litres per minute, powered from a re-chargeable battery (charger and battery supplied)
<b>Lance</b>	Telescopic lance complete with rose head 6 metre reach Ref. B Short lance for tubs and beds
<b>Chassis</b>	4-wheel chassis with forward and reverse gears. 3.5 Hp Briggs and Stratton engine.



## WALK BEHIND ELECTRIC POWERED WATERER (REF:WBEPW)

<b>Tank capacity</b>	70 litres
<b>Weight guide</b>	Empty 62kg. Full 129kg
<b>Dimensions</b>	W 705mm. H 910mm. L 1435mm
<b>Pump</b>	12-volt diaphragm pump 18 litres per minute, powered from a re-chargeable battery
<b>Lance</b>	Telescopic lance complete with rose head 6 metre reach Ref. B Short lance for tubs and beds
<b>Chassis</b>	3-wheel chassis supports the tank.
<b>Wheels</b>	The two rear wheels swivel through 360°. The front wheel houses a powerful 24 volt motor. The 24 volt battery and charger are supplied with each unit.



## SKID MOUNTED 180 LITRE HANGING BASKET WATERER (REF: HBWSK120)

<b>Tank capacity</b>	180 litres (40 gallons)
<b>Chassis</b>	The tank and pump are secured to a metal skid frame. This is a useful unit for placing in the back of a vehicle or on a trailer
<b>Weight guide</b>	Empty 50 kg. Full 231 kg
<b>Pump</b>	12 volt DC electric pump powered by a battery with free flow rate of 18 litres (3.9 gallons) per minute
<b>Lances</b>	Telescopic lance with a removable rose head for baskets, up to 6 metre reach Ref. B Short lance for tubs and beds
<b>Hose</b>	6 metres (20') heavy-duty hose c/w on/off lever tap, Quick-fit couplings for simple change over
<b>Dimensions</b>	Width 600mm (24") Height 700mm(28") Length 1300mm(52")



## TROLLEY MOUNTED WATERER (REF:WI40E/WI40P)

	(P) –Petrol pump (E) –Electric pump
<b>Tank capacity</b>	180 litres
<b>Weight guide</b>	Empty 50 kg. Full 250kg
<b>Mounting</b>	4-wheel turntable trolley, pulled or towed, parking brake
<b>Dimensions</b>	W 660mm. H 1090mm. L 1300
<b>Pump</b>	Electric 12-volt diaphragm pump 18 litres per minute, powered from a rechargeable battery Petrol Pump - 1" centrifugal, 150 litres (33gals) per minute
<b>Lances</b>	Telescopic lance complete with rose head, up to 6 metre reach Ref. B Short lance for tubs and beds
<b>Hose</b>	6 metres (20') heavy-duty hose c/w on/off lever tap, quick-fit couplings for simple lance change over





# Waterers & Bowsers

All SCH watering units are supplied with a telescopic lance, a short lance and 6 metres of heavy-duty hose as standard.



## SKID MOUNTED 270 LITRE HANGING BASKET WATERER (REF:W270E)

- (E) – electric pump (Petrol pump option not available on this model)
- Tank capacity** 270 litres (60 gallons)
- Weight guide** Empty 30 kg – Full 300 kg
- Pump** 12 volt DC diaphragm pump with free flow of 18 litres (3.9 gallons) per minute
- Lances** Telescopic lance with a removable rose head for baskets, up to 6 metre reach Ref. B  
Short lance for tubs and beds
- Hose** 6 metres of heavy-duty hose is supplied c/w on/off facility at the lance
- Dimensions** Width 700mm(28") Height 870mm (34") Length 1200mm (48")



## SKID MOUNTED 600 LITRE BASKET WATERER (REF:W3100E / W3100P)

- (E) - Electric Pump (P) - Petrol Pump
- Capacity** 600 litre (132 gallons)
- Mounting** Skid for mounting on rear of vehicles or trailers
- Dimensions** (E) Width 800mm (32"), Height 1270mm (50"), Length 1200mm (48")  
(P) Width 800mm (32"), Height 1000mm (39"), Length 1650mm (66")
- Lance** Ref. B
- Weight guide** Empty 61 kg – Full 660 kg (Approximately)

## SKID MOUNTED 900 LITRE BASKET WATERER (REF:W3200E / W3200P)

- (E) - Electric Pump (P) - Petrol Pump
- Capacity** 900 litre (200 gallons)
- Mounting** Skid for mounting on rear of vehicles or trailers
- Dimensions** (E) Width 1000mm (39"), Height 1270mm (50"), Length 1200mm (48")  
(P) Width 1000mm (39"), Height 1270mm (50"), Length 1650mm (66")
- Lance** Ref. A
- Weight guide** Empty 87 kg – Full 985 kg (Approximately)



General to all electric units (with exception of HBWP) will operate on a pressure on/off system. Open the lance tap and the pump will start / Close the lance tap and the pump will stop (Battery conservation)



**All SCH watering units are supplied with a telescopic lance, a short lance and 6 metres of heavy-duty hose as standard.**

## TOWED WATER UNIT

(REF: HBU900E) (E) – Electric pump

(REF: HBU900P) (P) – Petrol pump

**Tank capacity** 900 litres (200 gallons) Baffled

**Chassis** Steel frame, over-run brakes, lights & jockey wheel

**Weight guide** Empty 250 kg. Full 1150 kg

**Pump** Electric – 12volt DC diaphragm pump with free flow of 18 litres (3.9 gallons) per minute. (powered from towing vehicle)

Petrol - 2" centrifugal Honda petrol pump – flow rate up to 450 litres (98 gallons) per minute (adjustable)

**Hose** 6 meters (20') of heavy-duty hose c/w on/off lever tap, quick-fit couplings for simple lance change

**Lances** Telescopic lance with a removable rose head for baskets, up to 6 metre reach Ref. B  
Short lance for tubs and beds



**Dimensions** Width 1500mm(59")  
Height 1300mm(51")  
Length 3000mm (118")

## WATER BOWSERS - FAST TOW UNITS

(REF: W5250(E) or (P)) (REF: W5500(E) or (P))

W5250 & W5500 – These 1140 litre (250 gallon) and 2273 litre (500 gallon) bowsers have metal or industrial grade PVC tanks with internal baffles to reduce water surge when moving.

The tanks are all mounted on twin axle over run braked chassis, complete with Jockey wheels, full road lighting and mudguards.

Ref:	Capacity	Dimensions	Wheel size	Weight guide
<b>W5250</b>	1140 litres (250 gallons)	W. 1420mm (56") L. 300mm (119") H. 1520mm (60")	165x R13	Empty 600kg Full 1734
<b>W5500</b>	2273 litres (500 gallon)	W. 1800mm (71") L. 3500mm (138") H. 1670mm (66")	205 xR16	Empty 780kg Full 3048 kg



## WATER BOWSERS - SLOW TOW UNITS

(REF: W6250(E) or (P)) (REF: W6500(E) or (P))

W6250 & W6500 – SCH manufacture many carrying capacity tanker trailers.

The tanks are mainly industrial grade PVC.

They can be supplied with or without discharge pumps.

The standard discharge pump is a Honda petrol powered 2" high volume pump

Giving 600 plm (adjustable)

If required a system can be fitted to the pump to allow the tank to be filled from alternative water supplies such as lakes, ponds, tanks etc.

Wheel size is 600 x 16c. Other sizes can be fitted at the customers request.

Ref:	Capacity	Dimensions	Wheel size
<b>W6250</b>	1140 litres (250 gallons)	W.1800mm (71") L. 3500mm (138") H. 1670mm (66")	600 x 16c
<b>W6500</b>	2273 litres (500 gallons)	W. 1800mm (71") L. 3500mm (138") H. 1670mm (66")	600 x 16c





# Waterers & Bowzers



Call Us: 01473 328272 Email: [sales@schsupplies.co.uk](mailto:sales@schsupplies.co.uk)

Product Search

Search...

To access information of these water units, simply note the reference of the product you wish to look at, go to our website at [www.schsupplies.co.uk](http://www.schsupplies.co.uk), search for the product code (bottom right hand corner). You will be able to see brief details of your chosen product. If this is not quite what you had in mind please contact us.



WG01



WG08



WG03



WG21



WG11



WG22



WG05



WG07



# Waterers & Bowzers



Call Us: 01473 328272 Email: [sales@schsupplies.co.uk](mailto:sales@schsupplies.co.uk)

Product Search

Search...

To access information of these pressure washer units, simply note the reference of the product you wish to look at, go to our website at [www.schsupplies.co.uk](http://www.schsupplies.co.uk), search for the product code (bottom right hand corner). You will be able to see brief details of your chosen product. If this is not quite what you had in mind please contact us.



WG15



WG10



WG16



WG25



WG26



WG14



WG23



WG24



# Waterers & Bowzers



Call Us: 01473 328272 Email: [sales@schsupplies.co.uk](mailto:sales@schsupplies.co.uk)

Product Search

Search...

To access information of these dust dampeners, simply note the reference of the product you wish to look at, go to our website at [www.schsupplies.co.uk](http://www.schsupplies.co.uk), search for the product code (bottom right hand corner).

You will be able to see brief details of your chosen product.

If this is not quite what you had in mind please contact us.



WG15



WG10



WG16



WG17



WG18



WG19



WG06



WG20



# Demountable People Carriers



You provide a flat bed trailer, or we can find one for you - We build the top unit and fit it out - The top can then be fitted to the trailer either by mechanical lift or by jack legs, then secured. The trailer with top unit removed can be used for general purposes.



## Demountable Finished Units





# Fast Tow People Carriers



**Optional Extras available include:-**  
**Secure boxes - Gun Racks - Ramps - Cartridge collection boxes - Logo boards**  
**External banqueting tables - Internal lights - Seat belts**





# People Carriers & Game Carts



## GAME CARTS

The standard SCH Game trailer will accommodate 250 birds hanging on pegs (The hanging 'pod' is heavily galvanized and can be removed to turn the trailer into a useful cargo carrying unit).

The birds are covered with a rain proof cover which is easily pulled back for loading / unloading. Ventilation openings are built into the front and rear to allow a cooling passage of air. Spent cartridge collection buckets can be mounted on the trailer if required. The trailer is fully road legal, lights, mudguards etc. All metal work is galvanized. A 50mm ball hitch is fitted as standard; other hitches can be fitted on request.

SCH will build a trailer to your own design if required.

- Trailer can be converted for general use
- Galvanised bird frame can be fitted to your open trailer
- We can build to your own requirements
- Over-run brakes





# Fun Trains



Why not convert your 'ride-on tractor' to a fun train?

Instead of part exchanging your old tractor in for a new one why not let us convert yours to a really great garden toy. We can also build carriages to suit. Contact us for more information and to discuss your ideas.





## RAINBOW EXPRESS

One of the great assets of SCH is that, if asked they will turn their hands to any task (within reason). One such request was for a children's train ride. SCH came up with the 'SCH Rainbow Express', each carriage has a comfortable padded seat and back rest. A lap belt for security of the passenger is fitted as standard. A steering wheel gives passengers that 'I'm in the driver seat' experience.

When used for hire or reward it is advisable to have a 'guards' trailer at the rear of the train. SCH can also supply a pulling tractor if required.

The train is suitable for ages from 5 to 13: The carriages come in a variety of colours.



**DO YOU HAVE A SPECIAL PROJECT THAT WE CAN HELP WITH?**  
Contact our sales team for a free quotation.





# SCH 1987 - 2015

Customer Service / Advice Line: 01473 328272 (office hours)



Sales - Jenny



Spares - Terry



Technical - Ian



Accounts - John



Andrew  
Managing Director

*We manufacture 90% of the products shown in our Suffolk workshops, so if you don't see what you are looking for ring our sales team to discuss your requirements*

*Did you know that we sell spare parts?  
Visit our spare part sales -  
[www.schsupplies.co.uk/category/spare-parts](http://www.schsupplies.co.uk/category/spare-parts)*

*All products are supplied with complimentary Draw Bar Pin*

*We stock Bonsar truck spares -  
Contact our sales team*

## TOWING HOOKS

The majority of SCH attachments are fitted with a clevis hitch and are designed for a towing height of 10 -14 inches (250-350mm). Other couplings such as a ball hitch, swivel hitch or ring hitch can be fitted if required.



Clevis Hitch



Adjustable Clevis Hitch



Ball Hitch

Dealer

SCH (Supplies) Ltd.,  
Holbrook, Ipswich IP9 2PT  
Telephone: +44 (0)1473 328272  
Fax: +44 (0)1473 327177  
Visit our website: [www.schsupplies.co.uk](http://www.schsupplies.co.uk)  
or email: [sales@schsupplies.co.uk](mailto:sales@schsupplies.co.uk)