

7 DAY DELIVERY

inoxxpress

inoxxpress

Series 01

System luminaires made of small aluminium profiles - elox

Code:

• 01-050K-1054E, E

Variant:

Recessed

Power:


• 1x 54W T5 G5

Accessories:


- 01-0003, N straight connector
- 01-0008, E end cap for recessed luminaires


Optic:


• Opal diffuser: LOR = 25%








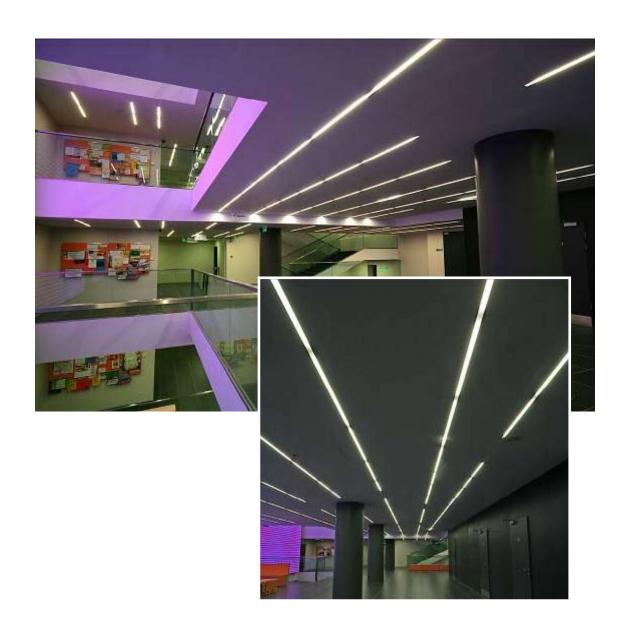

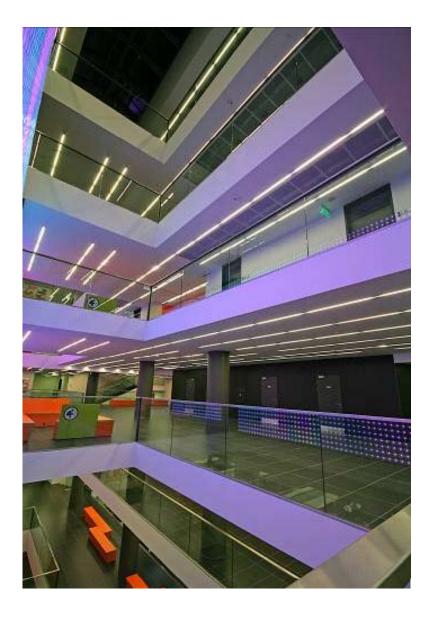



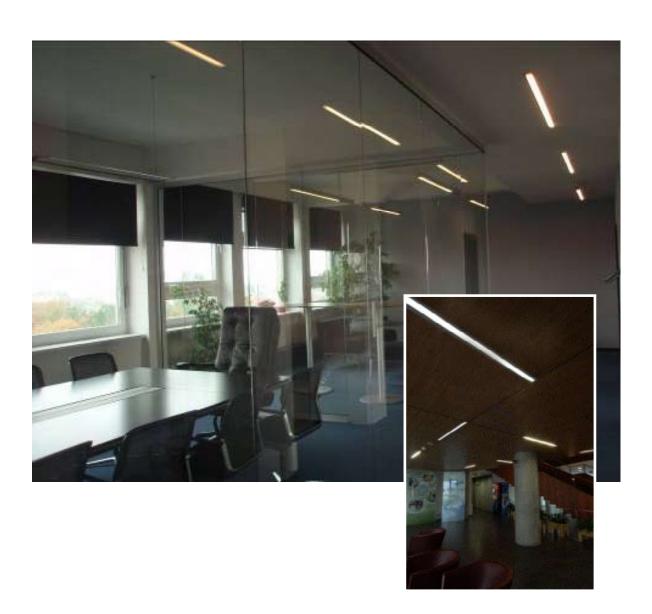

inoxxpress

Series 03

System luminaires made of aluminium profiles - elox

Code:

• 03-550A-1054E, E

Variant:

• Pendant/surface

Power:

• 1x 54W T5 G5


Accessories:

- 01-0003, N straight connector
- 03-0006, E end cap for pendant luminaires
- 03-0007, N wire suspension 2000mm

Optic:


Parabolic louvre: LOR = 70%, L < 200cd/m²









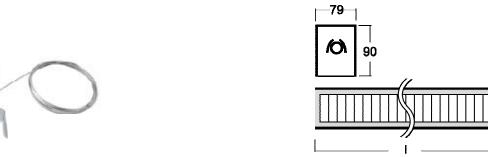



System luminaires made of aluminium profiles - elox

Code:

- Single and double eletric units for HO lamps
- Single and double profiles

Variant:


- Pendant/surface
- Recessed

Accessories:


- 01-0003, N straight connector
- 03-0003, E 'L' coupler pendant
- 03-0006, E end cap for pendant luminaires
- 03-0007, N wire suspension 2000mm
- 03-0018, E end cap for recessed luminaires
- 03-0029, E 'L' coupler recessed

Optic:

• Opal diffuser PMMA: LOR = 39%


















System luminaires made of aluminium profiles - elox

Electric module


Electric units:


- 1 x T5 24, 39, 54 and 80W
- 2 x T5 24, 39, 54 and 80W (double)

Profile:

- Start / independent
- Continuous
- Sizes profiles for 1 to 2 units
- Configuration of luminaires




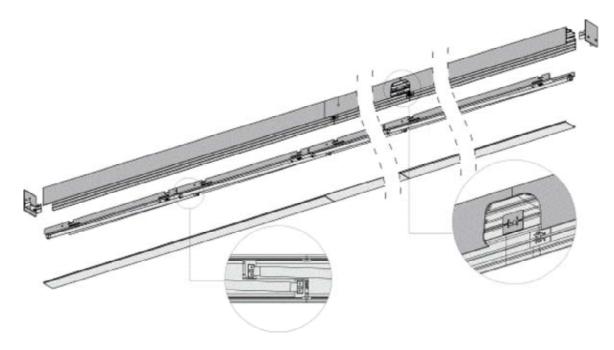


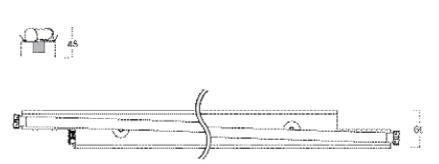






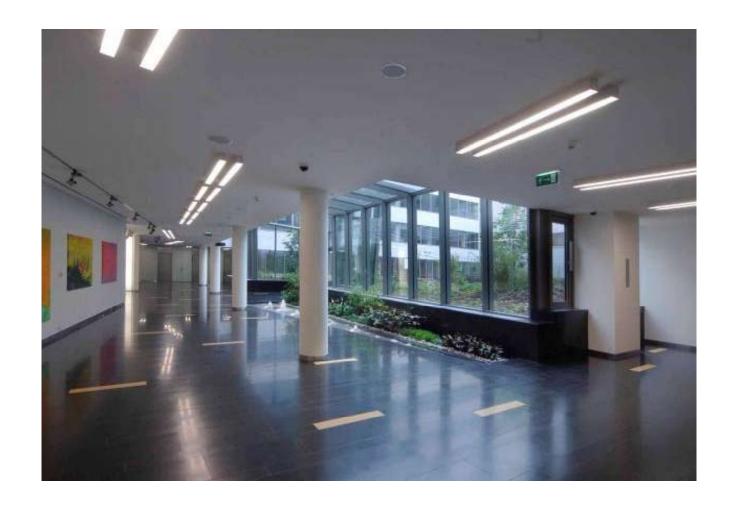

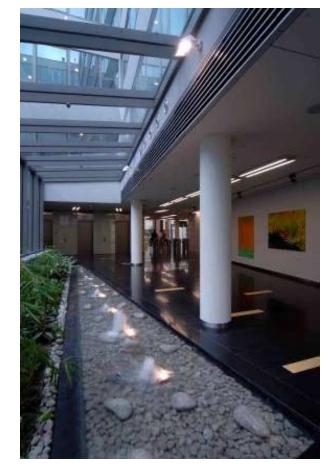

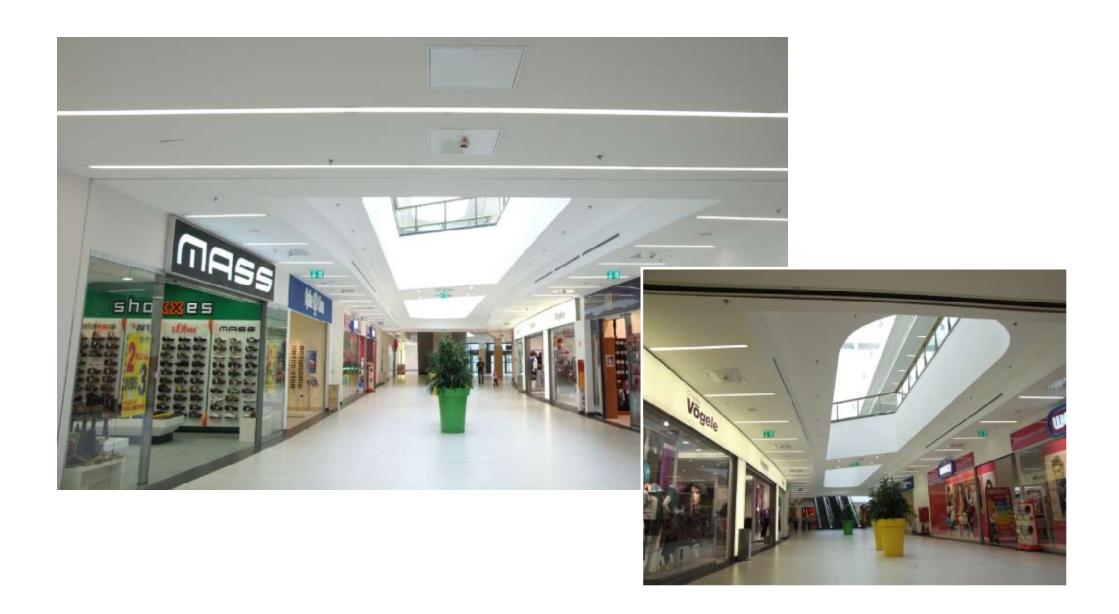











System luminaires made of aluminium profiles - elox

Code:

- 10-571A-2054E-P, E
- 10-551K-2054E-P, E
- 10-550N-1100R-P, E

Variant:

• Pendant

Power:


• 2x 54W T5 G5


Accessories:

- 10-0002, N straight connector
- 10-0003, E 'L' coupler
- 10-0006, N wire suspension 2000mm, 'Y' shaped
- 10-0007, E profile end cap

Optic:

- Parabolic louvre: LOR = 93%, L < 1000cd/m²
- Opal diffuser: LOR = 82%, L < 1000cd/m²

























Luminaires made of aluminium profiles - anodised

Code:

- 13-200K-4024E, E
- 13-240K-2024E, E
- 13-250K-1V1UE, E

Variant:

• Surface/pendant

Power:


- 4x 24W T5 G5
- 2x 24W TC-L 2G11
- 1x 22W + 1x 40W T16-R 2GX13


Accessories:

- 13-0001, S wire suspension kit for square luminaires
- 13-0002, S wire suspension kit for round luminaires

Optic:

• Opal diffuser: LOR = 56-61%

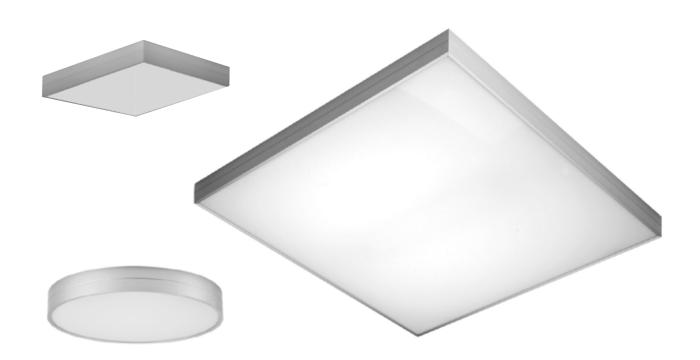









Luminaires made of aluminium profiles - anodised

Code:

- 13-511A-2054E, EB
- 13-511A-2054E, EW

Variant:


• Pendant


Power:

• 2x 54W T5 G5

Optic:

• Parabolic louvre: LOR = 92%, L < 1000cd/m²

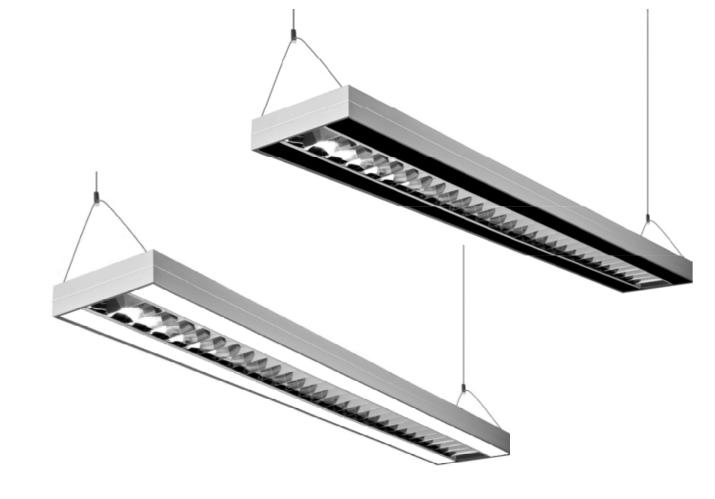



Luminaires made of aluminium profiles - anodised






Luminaires made of aluminium profiles - anodised





Luminaires made of aluminium profiles - anodised

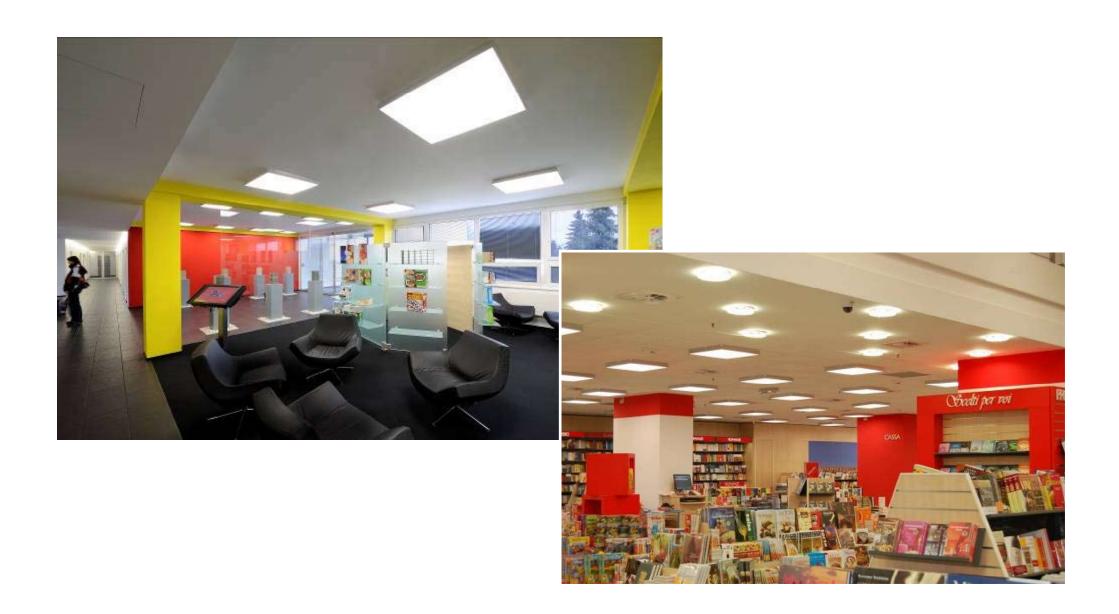

Luminaires for accent illumination made from powder coated steel sheet - structural silver

Code:

- 21-000N-1100R, S
- 21-000N-2100R, S
- 21-001N-1, S
- 21-001N-2, S

Variant:

Recessed

Power:

- 1-2x 100W max. QR 111 G53
- 1-2x 35W and 70W HIPAR 111 GX8,5

Electric units:

- 70-0004I for metal halide lamps 1x35W, connection E
- 70-0005I for metal halide lamps 1x70W, connection E
- 70-0011I for metal halide lamps 2x35W, connection E
- 70-0012I for metal halide lamps 2x70W, connection E













Luminaires for accent illumination made from powder coated steel sheet - elox

Code:

• 21-540N-4100R, E

Variant:

• Pendant

Power:

• 4x 100W max. QR 111 G53



Luminaires for accent illumination made from powder coated steel sheet - elox



Luminaires for accent illumination made from powder coated steel sheet - elox



Recessed plastic luminaire - white

Code:

- 50-005P-2018E, W electronic ballast
- 50-005P-2018K, W magnetic ballast
- 50-005P-2026E, W electronic ballast
- 50-005P-2026K, W magnetic ballast

Variant:

Recessed

Power:

- 2x 18W TC-D/TC-DEL
- 2x 26W TC-D/TC-DEL


Accessories:


- 50-020N radial louvre
- 50-050N polycarbonate opal cover, IP440


Optic:


• Without accesories: LOR = 72%

• Radial louvre: LOR = 48% • Opal diffuser: LOR = 47%















Recessed plastic luminaire - white







Square recessed luminaires made from aluminium frame - anodised

Code:

- 66-003L-2018E, E
- 66-003L-2018K, E

Variant:

Recessed

Power:

- 2x 18W TC-DEL
- 2x 26W TC-DEL


Accessories:


• 66-0002, W - opal cover, IP40


Optic:

• Without accesories: LOR = 62%


• Opal diffuser: LOR = 34%

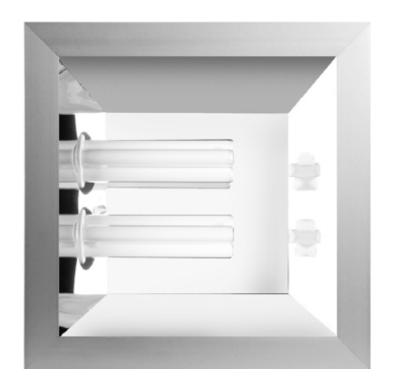










Square recessed luminaires made from aluminium frame - anodised

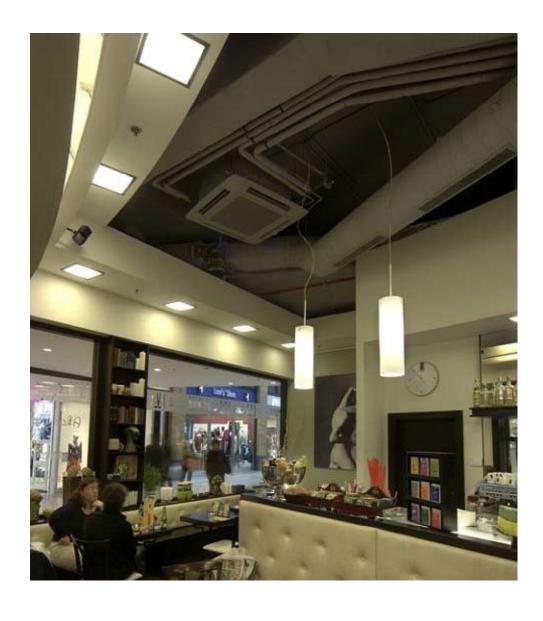



Square recessed luminaires made from aluminium frame - anodised







Inox Technical Lighting Ltd.
Unit 22 Brookside Centre
Sumpters Way, Temple Farm Industrial Estate
Southend-on-Sea SS2 5RR

t: 0845 643 9533 | e: sales@inox.co.uk

(www.inox.co.uk