

Pipette Controller Filters

Our pipette controller filters are commonly used in cleanroom environments and laboratories where control of potential cross contamination is a high priority.

Features and benefits


- Inlet and outlet Male Slip Luer as standard making our pipette controller filters a universal fit.
- Manufactured with Borealis polypropylene
- Allowing the ingress of sterile air whilst transferring fluids
- High particle retention due to natural hydrophobic PTFE micron rating
- Our tamper-printing technology allows us to incorporate your logo onto the filter housing, offering brand marketing opportunities.
- Media is ultrasonically welded
- Tested to withstand up to 50 psi (3.44 bar)



Testing available on request

- Bubble point tested
- Clean pressure drop
- Water-entry-pressure
- Flow rate
- Burst integrity test
- Pressure test

Air Flow Rate for FH4235

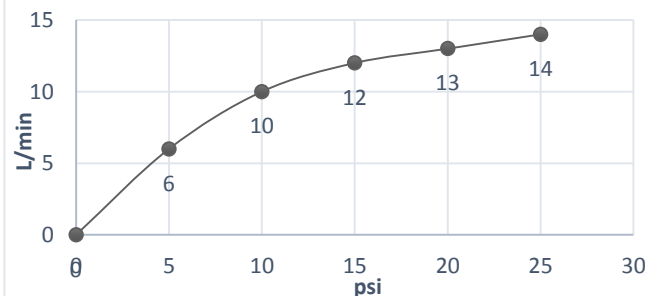

Order	Micron Size	Media	Connector	Size	Sales Unit
FH4235	0.2µm	PTFE	Male Slip Luer / Male Slip Luer	25mm	50 filters
FH4335	0.45µm	PTFE	Male Slip Luer / Male Slip Luer	25mm	50 filters