

APPLICATION DATA SHEET



Control Systems

Transmitters

Sensors

Accessories

TOCSIN 650 SERIES

Advanced Addressable 2-Wire Gas Detection System



The latest addressable technology from International Gas Detectors.

Communication over Power

Only uses 2 Core Cable for Power and Communication.

Polarity Independent.

Typical System is 40% Faster to Install with Fewer Connections

Improved Reliability

Improved Connectivity to External systems

Re-use Existing Cabling When Updating ATEX and Safe Area Gas Detectors


USB For Backup and Data Collection

Ethernet Connectivity

Full Event Monitoring, Time & Date Stamped

Rs485 BMS Connectivity

2-Wire Addressable I/O Cards
Control Where its Needed

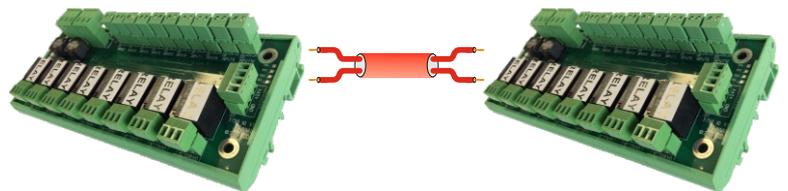

2 Data Highways Each Supporting 32 Gas Detectors/Devices Using 2 Core Cable



2 Wire Local Displays With Options for Slam Switches, Sounders Detectors and I/O

2 Wire Addressable Gas Detectors. Flammables, Toxic's, Oxygen

2 Wire Addressable ATEX Gas Detectors. Flammables, Toxic's, Oxygen



Triton House
Crosby St
Stockport
SK2 6SH
England

Ref T650E

Tel: +44 (0)161 483 1415
Fax: +44 (0) 161 484 2345
Email: sales@internationalgasdetectors.com
Website: www.internationalgasdetectors.com



APPLICATION DATA SHEET



Control Systems

Transmitters

Sensors

Accessories

Standard Specifications

Power	110/230V AC 50/60Hz 24V DC Option
Construction	ABS
Display	2 Lines x 8 Digit LCD Display Multi-Colour Backlight (Red-Alarm, Yellow-Fault, Blue-Normal)
User	IGD Jog Wheel Option Select
Outputs	3 off SPCO Relays 4A Non-Inductive User Configurable 1 off Fault Relay SPCO Relays 4A Non-Inductive 1 off Solid State Beacon Sounder Output <i>Additional Digital Inputs/Relay Outputs Can Be Added To Highways if Required</i>
Other I/O	Sounder 80dB @ 100mm (Mutable) 2 off RS485 Ports Modbus Dedicated E-Stop/Slam Switch Input Dedicated Fire System Interlock Ethernet Port USB
Inputs	Up to 64 off Addressable Series Detectors or I/O Modules Over 2 Addressable Highways <i>Additional Highways Possible With Additional Hub Cards</i> <i>Note external Booster PSU may be required</i>
Temperature	-5 to 40 Deg C Full Specification. To 55 Deg C De-Rate PSU by 15%
Humidity	0-95% RH Non-Condensing
Sealing	IP54
Mounting	Wall Mount
Weight	1.75Kg

Standard Features

3 Alarms Levels Programmable Per Detector

Alarms Configurable as Rising, Rising Latching, Falling, Falling Latching

Full Interface Capability With Two RS485 Interfaces For Modbus

Full Modbus Memory Map, Read from All Connected Devices to External BMS/SCADA/DCS Systems.

Set up From Control Panel or Android Interface App

Optional Internal Battery Backup or External Battery Backup

If Fitted, Battery Backup status Indicated From On Screen Display

1 Second Update For All Connected Devices

Sensor Check Function Automatically checks For Correct and Timely Calibration and Operation

Continuos Error Checking

Calibration Possible At Sensor or From Controller

Events Logging For up to 1000 Events Time and Date Stamped

Extensive Service and Calibration Features

Meets the Requirements of EN 60079 Series of Standards For Gas Detection.

APPLICATION DATA SHEET



Control Systems

Transmitters

Sensors

Accessories

EC Declaration of Conformity



Issuers name and address:

Oliver IGD Limited of
Triton House
Crosby St,
Stockport,
United Kingdom

Declares that the product listed as:

TOCSIN 650

Addressable Gas Detection Control Panel

Are in conformity with the provisions of the following European Directive(s) when installed, operated, serviced and maintained in accordance with the installation and operating instructions contained in the product documentation.

2004/108/EC **EMC Directive**
2006/95/EC **Low Voltage Equipment Directive** (*note not applicable to 24V DC Powered Versions*)

And that the standards and/or technical specifications referenced below have been applied or considered.

EN 61779-1:2000	Electrical apparatus for the detection and measurement of flammable gases, general requirements and test methods.
EN 50271:2001	Electrical apparatus for the detection and measurement of combustible gases, toxic gases or Oxygen: requirements and tests for apparatus using software and or digital technologies. <i>Excluding requirements for SIL</i>
EN 61000-6-2: 2005	EMC Generic standards. Immunity for industrial environments
EN 61000-6-4/A1: 2011	EMC Generic standards. Emission standard for industrial environments
EN 61000-3-2: 2014	EMC Limits. Limits for harmonic current emissions (equipment input current ≤ 16 A per phase)
EN 61000-3-3: 2013	EMC Limits. Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase

Technical File Reference T650-TF9

Oliver IGD Limited Operate and Independently assessed ATEX/IECEX QAN.

Oliver IGD Limited operate an independently assessed ISO9001:2008 Quality Management System.

Testing Agency:

Quality Assurance Certificate Number
ExVeritas 16PQAN0014

Quality Management Certificate Number
FS 646773

TUV - SUD
Octagon House
Concorde Way
PO 15 5RL
Fareham



Quality Assurance Notification Number:
2585

ExVeritas,
Units 16-18,
Abenbury Way,
Wrexham Industrial Estate,
Wrexham, UK, LL13 9UZ

BSI Assurance UK LTD,
Chiswick High Road,
London
W4 4AL
UK

TUV Certificates and reports can be checked on-line at https://www.tuev-sued.de/industry_and_consumer_products/certificates
Select Oliver IGD when prompted on the website to view certificates

Issued by: Oliver IGD Limited, Stockport, SK2 6SH , United Kingdom

Signature:

Declaration of Conformity in accordance with EN ISO/IEC 17050-1:2004

Name

Andrew J Collier M.I.O.D

Position:

Managing Director

Date: 1.June 2015

Declaration Ref: T650-DEC-3

Ref T650E



Triton House
Crosby St
Stockport
SK2 6SH
England

Tel: +44 (0)161 483 1415

Fax: +44 (0) 161 484 2345

Email: sales@internationalgasdetectors.com

Website: www.internationalgasdetectors.com



APPLICATION DATA SHEET




Control Systems

Transmitters

Sensors

Accessories

TOCSIN 650 PHYSICAL

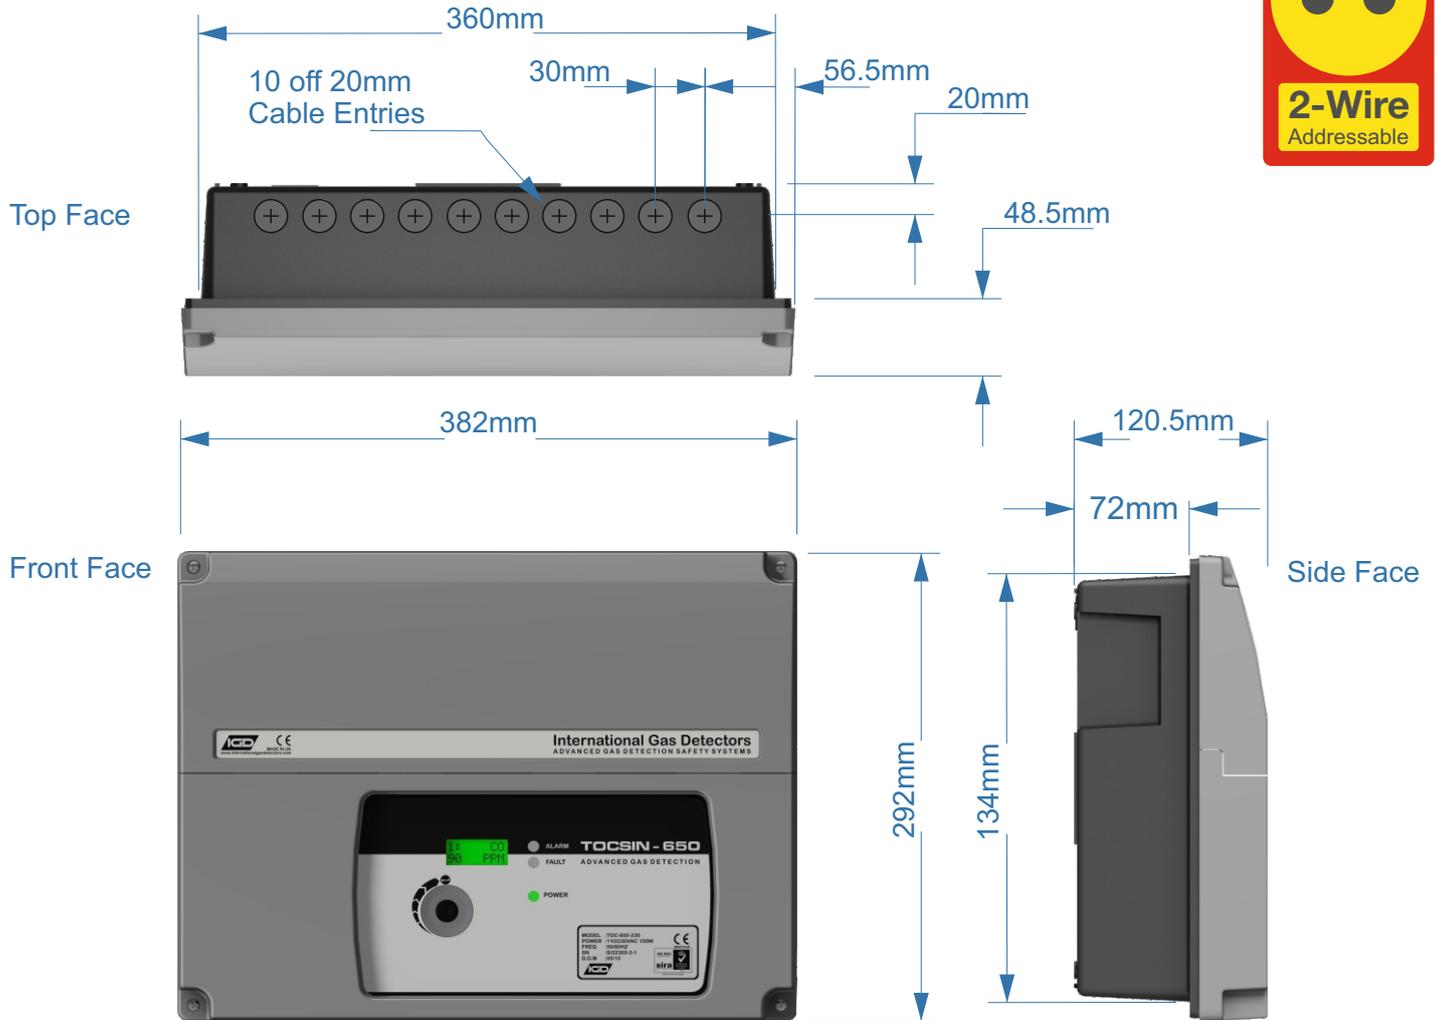

Installation Cables

Supported Installation Cables 2 Core 1.5mmSQ or 2.5mmSQ See IGD Cable System Calculator

Typically SWA, MICC, FP200, SY, CY, H03VVH2-F Mains Cable Unscreened or Similar



Triton House
Crosby St
Stockport
SK2 6SH
England

Ref T650E

Tel: +44 (0)161 483 1415
Fax: +44 (0) 161 484 2345
Email: sales@internationalgasdetectors.com
Website: www.internationalgasdetectors.com



APPLICATION DATA SHEET



Control Systems

Transmitters

Sensors

Accessories

Order Codes

Part Number	Description
TOC-650-24	24V DC Control Panel No Internal PSU Standard Features including 2 x 8 RGB Display and Jog Wheel 4 Relays, 2 Highways
TOC-650-150	110/230V AC Control Panel 150W PSU Standard Features including 2 x 8 RGB Display and Jog Wheel 4 Relays, 2 Highways
TOC-650-150BB	110/230V AC Control Panel 150W PSU Standard Features including 2 x 8 RGB Display and Jog Wheel 4 Relays, 2 Highways Built in 1.2AH Battery Backup
TOC-650-150B1	110/230V AC Control Panel 150W PSU Standard Features including 2 x 8 RGB Display and Jog Wheel 4 Relays, 2 Highways Built in 5AH Battery Backup
TOC-650-300	110/230V AC Control Panel 300W PSU Standard Features including 2 x 8 RGB Display and Jog Wheel 4 Relays, 2 Highways
TOC-650-300B1	110/230V AC Control Panel 300W PSU Standard Features including 2 x 8 RGB Display and Jog Wheel 4 Relays, 2 Highways Built in 5AH Battery Backup
TOC-750-BAT1	110/230V AC Power Module 300W PSU 5AH Battery Backup NOTE: Use with 24V DC Version Tocsin 650/750
TOC-750-BAT2	110/230V AC Power Module 300W PSU 17AH Battery Backup NOTE: Use with 24V DC Version Tocsin 650/750
TOC-750-BAT3	Booster Module With Battery Backup 5AH Battery Capacity 24V DC PSU at 150W
TOC-750-BAT4	Booster Module 24V DC PSU at 150W



TOCSIN 750 Series Controller



TOCSIN 750 Series Annunciator
Options With:
Display, Relay Output, Digital or
Analogue Input, Flammable Gas Detector




TOCSIN 750 Series Detectors
Flammable Gases, Toxic Gases
Oxygen



TOCSIN 102 Series Detectors 2-WIRE
Flammable Gases, Toxic Gases
Oxygen For ATEX Applications

Ref T650E

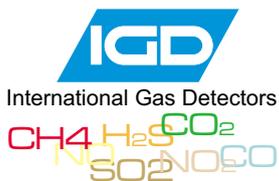

Triton House
Crosby St
Stockport
SK2 6SH
England

Tel: +44 (0)161 483 1415
Fax: +44 (0) 161 484 2345
Email: sales@internationalgasdetectors.com
Website: www.internationalgasdetectors.com



APPLICATION DATA SHEET



Control Systems

Transmitters

Sensors

Accessories

System Example



Controller in Supervisors Office

Where Required For Longer Cable Runs or Where Device and Accessory Density is High add Power Boosters or Cascade Hubs to Increase Distance Capability to up to 3KM



ATEX Zoned Area

Mix Annunciators With Other Addressable Devices Such as TOC-750 Series Detectors. Use ATEX Rated detectors where required

Use Annunciators For Door Entry Control.



Use Annunciators with Gas Detector Interfaces to Detect & Alarm in Specific Areas

Laboratory



Gas Bottle Store



Use the Detector or Annunciator I/O Capability to Control Gas Supply Valves, Beacon-Sounders or other devices

2 Core Highway as:
24V L1,L2
Typically 1.5mmSQ
Unscreened Cable