

• CUSTOMER SERVICE • INNOVATION • MANUFACTURING • QUALITY • TECHNICAL EXPERTISE • EXCELLENCE • DESIGN •



The Right Connection[®]

EZ Link[™] Cam & Groove



Customer Service: **+44 (0)1772 323529**


Email: **sales@dixoneurope.co.uk**



www.dixoneurope.co.uk

EZ Link™ Armless Cam & Groove

Evolution of the Cam

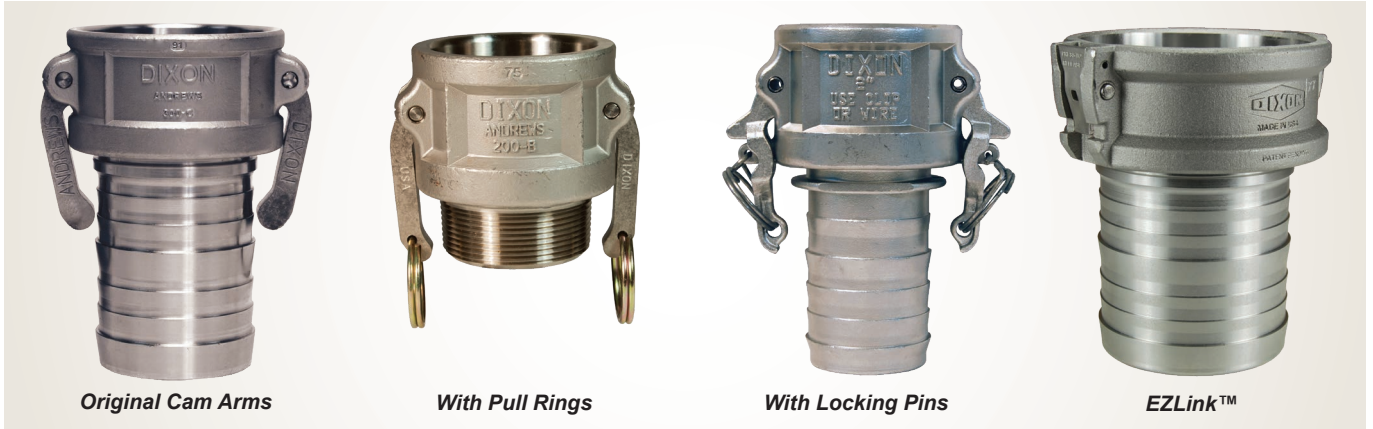

EZLINK™
THE FUTURE OF CAM & GROOVE
Push-to-connect, low profile, positive locking system and more!

Patent Pending

**A Dixon innovation.....
leaving the competition up in arms.**



Applications:

- transfer and/or unloading of fuels (gasoline or diesel) from tank truck to storage tanks
- transfer of liquids compatible with the available coupling and gasket materials

Materials:

- Couplings and dust caps: A356 aluminum, 316 stainless steel
- Coupler tabs and springs: 316 stainless steel
- Gasket: Buna-N
- Gasket: Fluorosilicone
- Gasket: FKM

Features:

- automatic couplers push-to-connect providing a reliable connection
- low profile allows easy connection and disconnection in tight applications
- coupler push tabs can be locked with safety pins and/or zip tie
- compatible with standard cam and groove adapters
- lifetime warranty on stainless steel tabs

Specifications:

- Maximum working pressure with King Crimp™ ferrules: 250 PSI (2"), 150 PSI (3" and 4")
- Maximum working pressure with crimp sleeves: 250 PSI (2"), 125 PSI (3"), 110 PSI (4")
- Maximum working pressure with band clamps: 250 PSI (2"), 125 PSI (3"), 100 PSI (4")
- Gasket temperature range: -15°C to 82°C (5°F to 180°F) for Buna-N
- Gasket temperature range: -29°C to 82°C (-20°F to 180°F) for Fluorosilicone
- Gasket temperature range: -15°C to 82°C (5°F to 180°F) for FKM

Warning:



Only use EZLink™ gaskets for this coupling system. Traditional cam & groove gaskets, or other types of seals are not compatible and will fail

EZ Link™ Armless Cam & Groove



Type B Couplers - Coupler x Male NPT*

Size	A356 Aluminum Part #	316 Stainless Steel Part #
1½"	EZL150-B-AL	EZL150-B-SS
2"	EZL200-B-AL	EZL200-B-SS
3"	EZL300-B-AL	EZL300-B-SS
4"	EZL400-B-AL	---

*BSP Available on Request



Type C Couplers - Coupler x King Crimp Hose Shank

Size	A356 Aluminum Part #	316 Stainless Steel Part #
1½"	EZL150-C-AL	EZL150-C-SS
2"	EZL200-C-AL	EZL200-C-SS
3"	EZL300-C-AL	EZL300-C-SS
4"	EZL400-C-AL	---



Type D Couplers - Coupler x Female NPT*

Size	A356 Aluminum Part #	316 Stainless Steel Part #
1½"	EZL150-D-AL	EZL150-D-SS
2"	EZL200-D-AL	EZL200-D-SS
3"	EZL300-D-AL	EZL300-D-SS
4"	EZL400-D-AL	---

*BSP Available on Request



Type DC Dust Caps

Size	A356 Aluminum Part #	316 Stainless Steel Part #
1½"	EZL150-DC-AL	EZL150-DC-SS
2"	EZL200-DC-AL	EZL200-DC-SS
3"	EZL300-DC-AL	EZL300-DC-SS
4"	EZL400-DC-AL	---



Replacement Gaskets

Size	Buna- N Part #	Fluorosilicone Part #	FKM Part #
1½"	EZL150-G-BU	EZL150-G-FV	EZL150-G-VI
2"	EZL200-G-BU	EZL200-G-FV	EZL200-G-VI
3"	EZL300-G-BU	EZL300-G-FV	EZL300-G-VI
4"	EZL400-G-BU	EZL400-G-FV	EZL400-G-VI



Replacement Parts

Size	Part #
1½" & 2"	EZL200RPLKIT
3" & 4"	EZL300RPLKIT



Safety Clip


Plated Carbon Steel Part #
EZLCL400

EZ Link™ Armless Cam & Groove

Guidelines for Connecting EZLink™

- Prior to connecting, inspect position of coupler tabs, as they will be in the 'same position' once full engagement occurs with coupling connection
- You can use the hose assembly leverage to assist with connecting and disconnecting.
- To connect, push female coupler (Type C) on to a mating male adapter. You should hear the tabs click into groove and see the tabs move into their original position.
- Appearance of orange on side of tab indicates the connection is not fully engaged.
- To disconnect depress each tab.

Tab

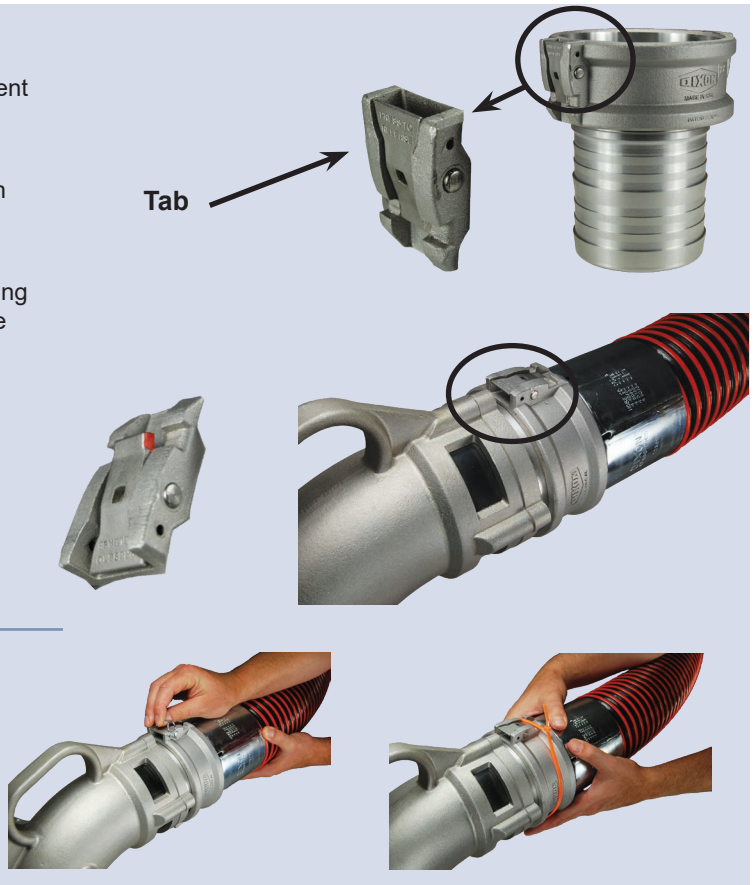

Note: Use safety clips or cable ties to lock tabs in place for additional security.

EZLINK™

THE FUTURE OF CAM & GROOVE

Now with a
LIFETIME WARRANTY

On stainless steel tabs, pins and springs

Customer Service: +44 (0)1772 323529

Email: sales@dixoneurope.co.uk



The Right Connection®