



TG-410




PRECISION HANDHELD ULTRASONIC THICKNESS GAGE

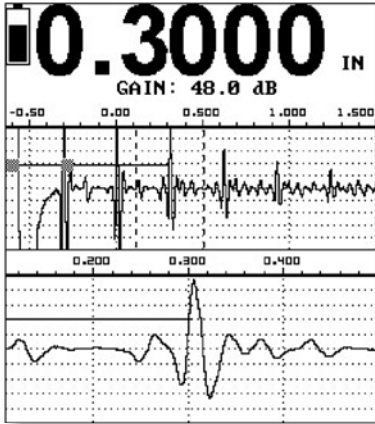


Dual A-Trace, second - third echo, RF

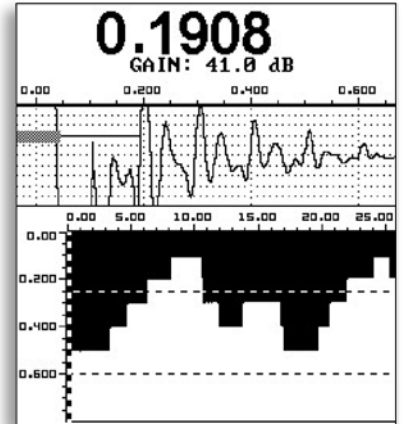

Adjustable time encoded B-Scan

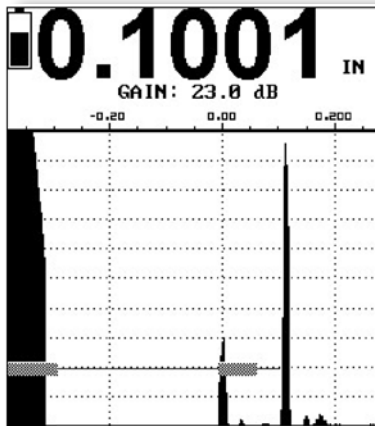

Full Wave, Through-paint, dual element

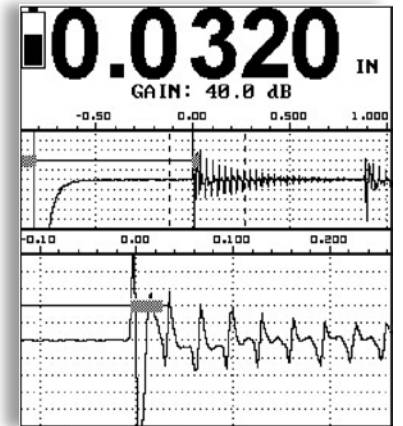

Delay line mode

Introduction

The TG-410 is a high-level handheld thickness gage offering a resolution of 0.0001". Its cleanly structured menu allows quick transducer setups while a freeze screen function lets the user take a closer look to a certain A-Scan signal and allows to store that particular image to the internal memory if desired. The unit can be connected to a PC to transfer stored data such as data logs, A-Scans, B-Scans and user-defined setups. The unit also allows for a time-encoded B-Scan image in addition to a momentary A-Scan.

Applications

- General ultrasonic thickness gaging
- Metals, plastics, composites, glass, rubber
- Tube, pipe tank, pressure vessel
- Investment castings
- Chemical milling
- Turbine blades
- Boilers Glass


TG-410



PRECISION HANDHELD ULTRASONIC THICKNESS GAGE

Key features

- Single and dual element transducers
- Contact, delay/immersion, through-transmission, shear mode
- High-Speed LCD display
- Freeze-screen direct access button
- SplitView: Dual A-Trace display
- SplitScan: View A-Scan and time-encoded B-Scan simultaneously
- Peak Echo Hold: Fixed or timed "waterfall" reset
- Default and user programmable setups
- Rugged aluminum case with rubber end caps
- Windows based Data Transfer software optional

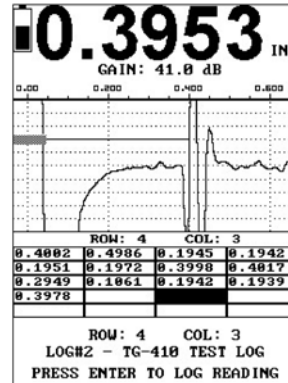

NAME:																																																												
TG-410 TEST LOG																																																												
COMMENTS:																																																												
Any comment is welcome _																																																												
<table border="1"> <tr> <td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td><td>9</td><td>0</td><td>=</td><td>Bk</td> </tr> <tr> <td>q</td><td>w</td><td>e</td><td>r</td><td>t</td><td>y</td><td>u</td><td>i</td><td>o</td><td>p</td><td>[</td><td>]</td> </tr> <tr> <td>Cap</td><td>a</td><td>s</td><td>d</td><td>f</td><td>g</td><td>h</td><td>j</td><td>k</td><td>l</td><td>:</td><td>'</td> </tr> <tr> <td>Shf</td><td>z</td><td>x</td><td>c</td><td>v</td><td>b</td><td>n</td><td>m</td><td>.</td><td>/</td><td>Up</td><td></td> </tr> <tr> <td>Ins</td><td>Del</td><td>Space</td><td>Lft</td><td>Rt</td><td>Dn</td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </table>	1	2	3	4	5	6	7	8	9	0	=	Bk	q	w	e	r	t	y	u	i	o	p	[]	Cap	a	s	d	f	g	h	j	k	l	:	'	Shf	z	x	c	v	b	n	m	.	/	Up		Ins	Del	Space	Lft	Rt	Dn						
1	2	3	4	5	6	7	8	9	0	=	Bk																																																	
q	w	e	r	t	y	u	i	o	p	[]																																																	
Cap	a	s	d	f	g	h	j	k	l	:	'																																																	
Shf	z	x	c	v	b	n	m	.	/	Up																																																		
Ins	Del	Space	Lft	Rt	Dn																																																							

Customizable data logger

Technical Specifications

General	Package	TG-410 unit, Rechargeable 'AA' batteries, AC charger, User manual, COC, Pelican Case
	Display	240 x 320 pixels 2.3in x 3.1in (58mm x 79mm) automatic/on/off backlight
	Dimensions	3.25in x 1.4in x 7in, 1.75lbs 82mm x 35.5mm x 178mm, 0.8kg
	Power source	6 field-replaceable 'AA' batteries (autonomy of 8 hours) or AC power
	Operating temp	32 F - 122 F (0 °C to 50 °C)
	Storage temp	-4 F - 140 F (-20 °C to 60 °C)
	Connector type	Dual Lemo00 or Dual BNC
Transducer	Type	Single and dual element Contact, Delay, Immersion, Through-transmission
	Frequency	0.5 MHz – 20 MHz
Performance	Measurement Range	0.020 in – 340 in (0mm – 8636mm)
	Resolution	0.0001 in (0.00254mm)
	Velocity	0.0490 in/us – 0.9999 in/us
Gates	Thickness gates	IP-1 st , 1 st -2 nd , 2 nd -3 rd IP blocking, IF blocking, IF-1 st blocking, 1 st -2 nd blocking POS and NEG
	Alarm types	Auditable and visual Thickness high, low, both
Pulser	Pulse volts PRF	250V 300Hz
Receiver	Gain	0 - 100dB (up to 0.1 increments)
	Damping Tuning	25Ω - 375Ω (8 damping levels) Filter on/off
	Display modes	RF, +HW, -HW, FW
Storage	Internal	20 setups storable
Connectivity	PC Software	Windows based USB Data Transfer Software: up- and download setups and data (optional)



Advanced NDT Ltd - Unit 4 Elgar Business Centre, Moseley Road, Hallow, Worcester, WR8 9JJ, UK
Tel: 44 (0) 1905 371 460

sales@advanced-ndt.co.uk www.advanced-ndt.co.uk

