




# WAFER-PV-D4252 N4552 D5252

3.5" SBC with Intel® Atom™ D425/N455/D525, DDR3, VGA/LVDS, Dual GbE, USB 2.0 and SATA 3Gb/s, Audio, RoHS

**New**

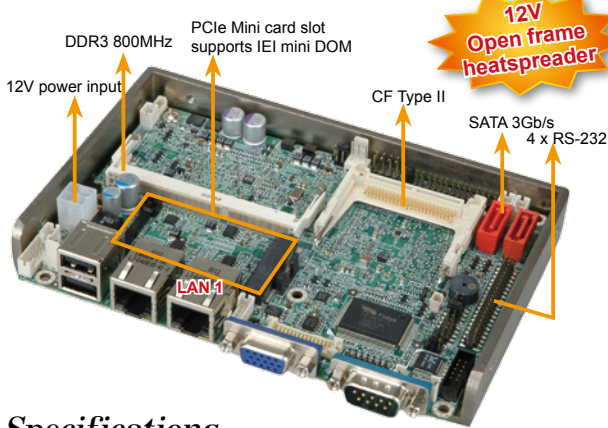

Solder side

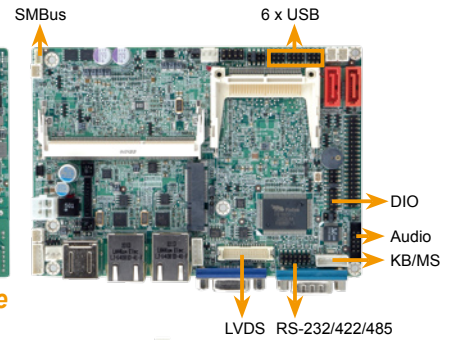

## Specifications

- ◆ CPU
  - Intel® Atom™ D525 dual-core processor 1.8GHz / 1MB L2 cache
  - Intel® Atom™ D425 single-core processor 1.8GHz / 512KB L2 cache
  - Intel® Atom™ N455 single-core processor 1.66GHz / 512KB L2 cache
- ◆ Chipset
  - Intel® ICH8M
- ◆ BIOS
  - UEFI BIOS
- ◆ Memory
  - One 204-pin 800MHz DDR3 SDRAM SO-DIMM supported (System max. 4GB for D525/ D425)
  - One 204-pin 800MHz DDR3 SDRAM SO-DIMM supported (System max. 2GB for N455)
- ◆ Graphic
  - GMA 3150
  - Graphic core speed 400MHz for D525/ D425
  - Graphic core speed 200MHz for N455
- ◆ Display Interface
  - Analog CRT up to 2048x1536 for D525/ D425, 1400x1050 for N455
  - Support for CRT hot plug
  - Single-channel 18-bit LVDS
- ◆ Ethernet
  - Dual GbE by Realtek RTL8111E, LAN1 with ASF2.0 support
- ◆ I/O Interfaces
  - 5 x RS-232                      1 x RS-232/422/485 with Auto Flow control
  - 1 x KB/MS                      2 x SATA 3Gb/s
  - 8 x USB 2.0                    1 x CF Type II
- ◆ Digital I/O
  - 8-bit digital I/O, 4-bit input / 4-bit output
- ◆ Expansion
  - 1 x PCIe Mini card slot (PCIe + USB + SATA signal) support IEI mini DOM
- ◆ Audio
  - Realtek ALC888 HD Codec
- ◆ Watchdog Timer
  - Software programmable support 1~255 sec. system reset by Super I/O
- ◆ Power Supply
  - 12V only, AT/ATX support
- ◆ Super IO
  - Fintek F81865F
- ◆ FAN Connector
  - 1 x 3-pin CPU fan
  - 1 x 3-pin system fan
- ◆ SMBus
  - 1 x 4-pin wafer connctor
- ◆ Power Consumption
  - 12V@1.79A (Intel® Atom™ D525 1.8GHz with DDR3 1GB)
- ◆ Temperature
  - 20°C ~ 60°C with free air, -20°C ~ 70°C with force air for D525 processor
  - 20°C ~ 65°C with free air, -20°C ~ 70°C with force air for D425 processor
  - 20°C ~ 70°C with free air, -20°C ~ 75°C with force air for N455 processor
- ◆ Humidity
  - Operation: 5% ~ 95%, non-condensing
- ◆ Weight
  - GW: 600g / NW: 250g



12V only

Dual Display

DDR3 800

SERIAL ATA SATA 3Gb/s


USB 2.0

Gigabit Ethernet GbE

## Features

1. 3.5" form factor with Intel® Atom™ D525 / D425 / N455 processor supports DDR3 memory
2. 12V only single voltage design for AT/ATX Power
3. Open frame heatsink thermal design for fanless solution
4. Support VGA and 18-bit single-channel LVDS with dual-display support
5. Complete I/O with eight USB, two SATA 3Gb/s, one CF II, six COM and audio
6. IEI One Key Recovery solution allows you to create rapid OS backup and recovery

## Dimensions (Unit: mm)

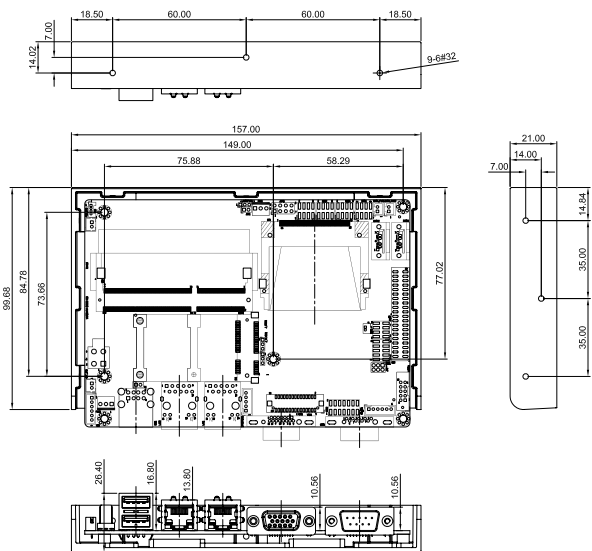

## Packing List

1 x WAFER-PV-D4252/N4552/D5252 single board computer	
1 x KB/MS cable (P/N: 32000-023800-RS)	
1 x Audio cable (P/N: 32000-072100-RS)	
1 x SATA with 5V output cable Kit (P/N:32801-000201-100-RS)	
1 x Quad RS-232 cable (P/N: 32200-025401-RS)	
1 x Power cable (P/N: 32100-087100-RS)	
1 x Enclosure heatsink	1 x Mini jumper pack
1 x QIG	1 x Utility CD

## Ordering Information

Part No.	Description
WAFER-PV-D5252-R10	3.5" SBC with Intel® Atom™ D525 1.8GHz, DDR3,VGA/LVDS, Dual GbE, USB2.0 and SATA 3Gb/s, audio, RoHS
WAFER-PV-D4252-R10	3.5" SBC with Intel® Atom™ D425 1.8GHz, DDR3,VGA/LVDS, Dual GbE, USB2.0 and SATA 3Gb/s, audio, RoHS
WAFER-PV-N4552-R10	3.5" SBC with Intel® Atom™ N455 1.66GHz, DDR3,VGA/LVDS, Dual GbE, USB2.0 and SATA 3Gb/s, audio, RoHS
32000-070301-RS	Dual port USB cable
32205-000300-100-RS	RS-232/RS-422/485 cable